

Product catalogue 2024

Industrial Adhesives and Tapes

3M EMEA

Valid from 01.12.2023

The information in this catalogue is current at the date of publication. Products availability may be amended by 3M from time to time. 3M is not liable in case of any errors or omissions.

Table of Contents

Adhesives, Sealants & Fillers

Two Part Structural Adhesives	11
One Part Structural Adhesives	28
Instant Adhesives	29
Anaerobic Adhesives	32
Curing Hot Melt Adhesives	33
Solvent-based Adhesives	35
Water-based Adhesives	41
Hot Melt Adhesives	43
Adhesive Sealants	48
Applicator Nozzles & Tips	55
Electric Applicators	56
Application Accessories	56
Adhesion Promoters	57

Cleaning Supplies

General Purpose Cleaners	62
--------------------------	----

Double Sided Tapes

VHB Tapes	66
General Purpose Foam Tapes	88
Adhesive Transfer Tapes	94
Membrane Switch Spacers	109
Bonding Tapes	117

Reclosable Fasteners

Hook & Loop	139
Dual Lock	142

Table of Contents

Single Sided Tapes

Vinyl Tapes	153
Foil Tapes	161
Polyester Tapes	163
PTFE tapes	166
UHMW Tapes	169
Filament Tapes	171
Specialty Application Tapes	177
Masking Tapes	179
Paper Masking Tapes	187
Cloth & Duct Tapes	188
Sealing Tapes	193

Paper and Print

Splicing & Tabbings Tapes	199
Flexographic Plate Mounting Tapes	207

Packaging Systems

Packaging Tapes	224
Box Sealing Tapes	227
Hang Tabs	236

Films

Surface Protection Films	238
--------------------------	-----

Tools & Equipment

Tape Applicators, Dispensers & Kits	240
Manual Applicators	242
Pneumatic Applicators	243

Table of Contents

Labels

Label Stock	246
-------------	-----



**Connect with us.
We're here to help.**

3M™ Bonding and Assembly Solutions

We can help you solve your design challenges

Finding the right adhesive or tape involves choosing likely candidates and testing them in your application. Knowing more about how adhesion works can help you find the right path.

Across industries, applications, and substrates, 3M offers a wide range of bonding products that make it easy to solve your real-world assembly challenges.

Bonding & Assembly Resources

Every project and material demands a unique bonding or assembly solution. So, to help you find the solution you need, we've put together a collection of resources.




Click or scan QR code

- Contact us
- Subscribe to Newsletter
- Request a sample
- Learn more about 3M Bonding Solutions
- Webinar On-Demand Portal
- Online product selector
- Technical Videos

Turning your design vision into manufactured reality

Companies are moving to automation to meet changing customer demands – and are improving their own businesses at the same time. Even low levels of automation can have a significant effect on improving your process, quality and cost.

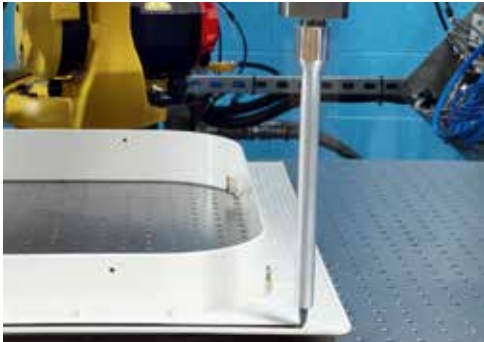

3M™ Automation Capabilities

Automation may benefit your process; however, some factors may influence your readiness to move to automated solutions. It's helpful to know where you fall on the spectrum for each of these factors.



3M™ Bonding Process Centre & 360 Experience

In our facility in Neuss, Germany, we explore with customers the right future for their manufacturing process. It features the latest automation equipment for adhesive dispensing and tape application.

Take a closer look at our 3M Bonding Process Centre in Neuss through our interactive 360 tour. See inside different areas across the site and learn more about the cutting-edge adhesive technology that's used there.



Model and simulate your bond

Get access to 3M™ Material Data Cards and expert. FEA support for your project. Book a 30-min meeting with our Expert.

**Success belongs to those who make a difference.
Let's take the road together.**



Click or scan QR code

- 360 Experience – 3M™ Bonding Process Center Neuss
- Brochure: 3M™ Bonding Process Centre Neuss
- Book a meeting with 3M™ Material Data Card (MDC) for Modelling / Finite Element Analysis (FEA) Expert
- Automation Handbook



3M™ Preferred Converter & Adhesion Distributor Networks

3M™ Preferred Converters

3M preferred converters enhance the value of 3M's top-tier tape adhesive technologies by crafting customised, cost-efficient shaped components tailored to your specific requirements. Their expertise encompasses materials and adhesive knowledge, complementing your design insights with practical adhesive solutions. Beyond adhesive recommendations, 3M converter partners bring extensive engineering know-how to the table, actively aiding your design process.

3M™ Preferred Adhesive Distributors

As a 3M preferred adhesive distributor, our partners make the commitment to understanding more than just adhesive chemistry. They understand the importance of serving industrial design and assembly customers with direct access to the right 3M adhesives, and technical support for their applications. They provide valuable technical and logistical expertise along with a comprehensive range of 3M adhesives.

Connect with a 3M expert

If you are interested in learning more about our preferred distributors or converting solutions and how they can be used to add value to your manufacturing process, please scan or click on the QR code below.



Click or scan QR code

- Connect with 3M experts
- Find your converter
- Adhesives - Where to buy



Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ 2 Part Structural Adhesives

Powerful adhesives that can bond even the most challenging surfaces.



Metal Bonding

3M™ Scotch-Weld™ Metal Bonder Acrylic Adhesive DP8407NS is the go-to adhesive for high-strength, durable bonding of metals, plastics, and composites. With excellent impact resistance and easy dispensing, DP8407NS is the ideal solution for your toughest bonding challenges.



Plastics Bonding

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8010 is the ultimate solution for low surface energy bonding. This two-part structural adhesive is specially designed to provide high-strength bonding for polypropylene, paints and other challenging surfaces.



Multi-Material Bonding

3M™ Scotch-Weld™ Composite Urethane Adhesive DP6310NS is a non-sag adhesive designed to provide superior strength and versatility for even the most challenging surfaces.



Nylon Bonding

3M™ Scotch-Weld™ Acrylic Adhesive 8910NS is the ultimate solution for bonding nylon materials. With its high strength and durability, this adhesive offers exceptional performance for a variety of industrial applications.



The Flexible

3M™ Flexible Acrylic Adhesive 8600 Series is a high-performing adhesive that offers excellent bonding strength, durability, and flexibility. Perfect for a wide range of applications.



The Tough

Discover the power of 3M™ Scotch-Weld™ Epoxy Adhesive DP490. With excellent bonding strength and durability, it's perfect for heavy-duty industrial applications.



The Fast

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8710NS is a high-performance, non-sagging adhesive with a rapid rate of strength build. It offers excellent bonding strength, durability, and impact resistance, making it ideal for demanding applications where reliability is crucial.



The Resistant

3M™ Low Odour Acrylic Adhesive 8700 Series is an adhesive that delivers superior bonding strength and excellent resistance to heat, water, and chemicals, with minimal odour.



Click or scan QR code

Adhesives, Sealants & Fillers

Two Part Structural Adhesives

3M™ Scotch-Weld™ Epoxy Adhesive DP100 Plus

Bond metals ceramics, glass and other dissimilar surfaces with 3M™ Scotch-Weld™ Epoxy Adhesive DP100 Plus. Our clear, epoxy adhesive with high shear strength for static loads is fast-setting and flexible to last in all conditions. It's designed to contract and expand to flex with a changing environment.

- Very flexible adhesive provides strong, permanent bond even under vibration and impact
- Fast 4 minute work life with handling strength in 20 minutes at room temperature
- Good high shear and peel strength



Product ID	Part Number	Product Name	MOQ	OU
7100148750	DP100PLUS-1.64OZ	3M™ Scotch-Weld™ Epoxy Adhesive DP100 Plus, Transparent, 48.5 ml, Applicator Needed	12	Each
7100069498	xxx	3M™ Scotch-Weld™ Epoxy Adhesive DP100 Plus, Transparent, 200 ml	12	Each

3M™ Scotch-Weld™ Epoxy Adhesive DP100FR

3M™ Scotch-Weld™ Epoxy Adhesive DP100FR is a flame retardant, non-sag, two-part, rigid epoxy adhesive offering a fast cure and machinability. It is a fast-setting epoxy that cures at room temperature to form a rigid bond. Low viscosity for easy dispensing and leveling. Non-sag formulation ensures adhesive stays where applied.

- UL 94 V-0 certified, FAR 25.853 60 second vertical burn test
- Adhesive formula cures rigid for high static load holding
- High shear ensures a permanent bonds



Product ID	Part Number	Product Name	MOQ	OU
7100148760	DP100FR-1.64OZ	3M™ Scotch-Weld™ Epoxy Adhesive DP100FR, Creme, 48.5 ml	12	Each

3M™ Scotch-Weld™ Epoxy Adhesive DP100

3M™ Scotch-Weld™ Epoxy Adhesive DP100 is a two-part, rigid epoxy adhesive offering a fast cure and machinability. It is a fast-setting epoxy that cures at room temperature to form a rigid bond. Has low viscosity for easy dispensing and leveling.

- Adhesive formula cures rigid for high static load holding
- High shear ensures permanent bonds
- Fast 5 minute work life with handling strength in 20 minutes at room temperature



Product ID	Part Number	Product Name	MOQ	OU
7100200484	xxx	3M™ Scotch-Weld™ Epoxy Adhesive DP100, Transparent, 48.5 ml	12	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Epoxy Adhesive DP105

3M™ Scotch-Weld™ Epoxy Adhesive DP105 is a very flexible, fast-setting, two-part epoxy adhesive that cures clear for invisible bond lines.

- Extremely flexible adhesive formula provides strong, permanent bond even under vibration and impact
- Maintains high shear and peel strength
- Flexible when cured, making it a good choice for multi-material bonding



Product ID	Part Number	Product Name	MOQ	OU
7100200485	DP10550	3M™ Scotch-Weld™ Epoxy Adhesive DP105, Transparent, 48.5 ml	12	Each

3M™ Scotch-Weld™ Epoxy Adhesive DP110 Grey

3M™ Scotch-Weld Epoxy Adhesive DP110 Grey is a flexible, fast-setting, two-part epoxy adhesive that works well on a variety of substrates, including metals, ceramics, concrete, composites, wood and many plastics.

- Flexible adhesive provides strong, permanent bond even under vibration and impact
- Maintains high shear and peel strength
- Flexible when cured, making it a good choice for multi-material bonding



Product ID	Part Number	Product Name	MOQ	OU
7100200487	xxx	3M™ Scotch-Weld™ Epoxy Adhesive DP110, Grey, 48.5 ml	12	Each

3M™ Scotch-Weld™ Epoxy Adhesive DP110 Translucent

3M™ Scotch-Weld™ Epoxy Adhesive 110 is a general purpose, fast setting, flexible, two-part epoxy adhesive. This medium viscosity adhesive cures to handling strength in 20 minutes in order to provide a flexible bond on materials such as metals, ceramics, woods and many plastics.

- Very flexible adhesive formula provides strong, permanent bond even under vibration and impact
- Provides high shear and peel strength on metals and many plastics
- Allows for some differential thermal expansion between substrates



Product ID	Part Number	Product Name	MOQ	OU
7100200486	xxx	3M™ Scotch-Weld™ Epoxy Adhesive DP110, Transparent, 48.5 ml	12	Each
7000079998	xxx	3M™ Scotch-Weld™ Epoxy Adhesive DP110, Transparent, 400 ml	6	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Epoxy Adhesive DP125 Grey

We formulated 3M™ Scotch-Weld™ Epoxy Adhesive 125 as a low odour, two-part epoxy that creates strong structural and flexible bonds on metal, ceramics, wood and many plastics. It provides the reliability and strength you need to maintain productive, cost effective results.

- Flexible for higher peel strength and better vibration resistance
- Maintains a strong bond under expansion, contraction, and limited movement
- Medium viscosity helps minimize running, dripping, or migration



Product ID	Part Number	Product Name	MOQ	OU
7100200488	xxx	3M™ Scotch-Weld™ Epoxy Adhesive DP125, Grey, 48.5 ml	12	Each
7100076727	DP125G	3M™ Scotch-Weld™ Epoxy Adhesive DP125, Grey, 400 ml	6	Each
7100084588	xxx	3M™ Scotch-Weld™ Epoxy Adhesive DP125, Grey, Part A, 18.9 L	1	Drum

3M™ Scotch-Weld™ Epoxy Adhesive DP190 Grey

3M™ Scotch-Weld™ Epoxy Adhesive DP190 is a two-part epoxy adhesive that delivers exceptional performance with high shear and peel strength. Extremely compatible, we formulated this epoxy adhesive to bond to a wide range of materials, such as metals, ceramics, wood, fiberboard, glass, rubber and many plastics.

- Use a tough high shear and peel strength adhesive
- Apply with ease with a low viscosity formulation
- Get a two-part epoxy adhesive that's highly compatible with many different materials



Product ID	Part Number	Product Name	MOQ	OU
7100269977	DP190	3M™ Scotch-Weld™ Epoxy Adhesive DP190 Grey, 18 L, Part A	1	Drum
7000080020	DP19010	3M™ Scotch-Weld™ Epoxy Adhesive DP190, Grey, 10 L Kit	1	Kit
7100269976	DP190	3M™ Scotch-Weld™ Epoxy Adhesive DP190, Grey, 18 L, Part B	1	Drum
7100200489	DP190	3M™ Scotch-Weld™ Epoxy Adhesive DP190, Grey, 48.5 ml	12	Each
7100200490	DP190	3M™ Scotch-Weld™ Epoxy Adhesive DP190, Grey, 400 ml	6	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Epoxy Adhesive 2216 Grey

3M™ Scotch-Weld™ Epoxy Adhesive 2216 allows you to work confidently with tiles and many different materials. Our high strength, two-part epoxy resin is excellent for bonding metals, woods, plastics, rubbers and masonry materials. It's a perfect tile adhesive – giving a high strength bond, yet flexible to withstand thermal expansion and contraction. It won't become brittle in the cold, either. Cure at room temperature, to a high strength bond with both high shear and peel strength, without compromise to flexibility. Mix with ease, the base and accelerator are contrasting colours. Our adhesive remains strong in all elements and is resistant to extreme shock, vibration, and flexing



- Very flexible bond is resistant to extreme shock, vibration and flexing, making it ideal for potting and applications in the transportation industries
- Maintains a strong bond under expansion, contraction, and limited movement while retaining good strength after environmental aging
- Excellent for cryogenic bonding applications or adhering substrates that will be exposed to extreme cold

Product ID	Part Number	Product Name	MOQ	OU
7100141727	2216KITGN	3M™ Scotch-Weld™ Epoxy Adhesive 2216, Grey, 1.6 L	1	Kit
7100141986	2216KITPN	3M™ Scotch-Weld™ Epoxy Adhesive 2216, Grey, 12 ml / 250 ml	12	Kit
7100140578	xxx	3M™ Scotch-Weld™ Epoxy Adhesive 2216, Grey, Part A, 20 L	1	Drum
7100140400	xxx	3M™ Scotch-Weld™ Epoxy Adhesive 2216, Grey, Part B, 18 L	1	Drum
7000000812	22162OZ	3M™ Scotch-Weld™ Epoxy Adhesive 2216, Grey, Part B/A, 59 ml	6	Kit
7100141716	xxx	3M™ Scotch-Weld™ Epoxy Adhesive 2216, Grey, Part B/A, 135 ml	12	Kit

3M™ Scotch-Weld™ Epoxy Adhesive DP410

3M™ Scotch-Weld™ Epoxy Adhesive 410 is a two-part structural adhesive. It is designed for use where toughness, high strength and rapid cure are required. It is fast setting and a high performance adhesive. It is tough with excellent durability.



- Rapid cure at room temperature; cure rate may be accelerated by the application of mild heat.
- Convenient 2:1 mix ratio by volume
- Mixed adhesive is low flow for ease of application

Product ID	Part Number	Product Name	MOQ	OU
7100055705	xxx	3M™ Scotch-Weld™ Epoxy Adhesive DP410, Activator, Transparent, 20 L	20	Liter
7100261739	xxx	3M™ Scotch-Weld™ Epoxy Adhesive DP410, Beige, 50 ml	12	Each
7100055704	xxx	3M™ Scotch-Weld™ Epoxy Adhesive DP410, Black, Part A, 20 L	20	Liter

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Epoxy Adhesive DP460

Whether joining, adhering, attaching, repairing, potting, panel or structural bonding, use 3M™ Scotch-Weld™ Epoxy Adhesive DP460. Our 60 minute work-life adhesive gives the highest shear, peel, impact, vibration and fatigue resistance in the Scotch-Weld™ Epoxy Adhesive family

- 60 minute work life allows sufficient time for adjustments
- Toughened for impact resistance and high fatigue resistance to withstand demanding conditions
- Easy-to-mix and apply for straightforward application



Product ID	Part Number	Product Name	MOQ	OU
7100200496	DP460	3M™ Scotch-Weld™ Epoxy Adhesive DP460 Off-White, 50 ml	12	Each
7100200497	DP460	3M™ Scotch-Weld™ Epoxy Adhesive DP460 Off-White, 50 ml	12	Each
7100200498	DP460	3M™ Scotch-Weld™ Epoxy Adhesive DP460, Beige, 400 ml	6	Each
7100269980	DP460	3M™ Scotch-Weld™ Epoxy Adhesive DP460, Off-White, Part A, 20 L	1	Drum
7100270164	DP460	3M™ Scotch-Weld™ Epoxy Adhesive DP460, Off-White, Part B, 20 L	1	Drum

3M™ Scotch-Weld™ Epoxy Adhesive DP490

3M™ Scotch-Weld™ Epoxy Adhesive 490 is a black, thixotropic, gap filling two component epoxy adhesive with particularly good application characteristics. It is designed for use where ultimate toughness and high strength are required.

- Get a tough, high strength adhesive
- High strength to withstand demanding conditions
- Non-sag for easy application to vertical surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100200499	DP490	3M™ Scotch-Weld™ Epoxy Adhesive DP490, Black, 50 ml, Label1	12	Each
7100200501	DP490400N	3M™ Scotch-Weld™ Epoxy Adhesive DP490, Black, 400 ml	6	Each
7100269979	DP490	3M™ Scotch-Weld™ Epoxy Adhesive DP490, Black, Part A, 18 L	1	Drum
7100269978	DP490	3M™ Scotch-Weld™ Epoxy Adhesive DP490, Black, Part B, 18 L	1	Drum

3M™ Scotch-Weld™ EPX Polyurethane Adhesive DP609

Bond plastics, wood and painted or primed metal surfaces with 3M™ Scotch-Weld™ EPX™ Polyurethane Adhesive DP609. Our fast curing, flexible structural adhesive has great strain capability, high toughness and ability to retain high strength over a wide temperature range.

- Work life of 7 to 9 minutes
- Reaches handling strength in around 30 to 45 minutes
- Non-sag formulation ensures adhesive stays where applied



Product ID	Part Number	Product Name	MOQ	OU
7100200502	xxx	3M™ Scotch-Weld™ EPX Polyurethane Adhesive DP609, Beige, 48.5 ml	12	Each
7000080396	xxx	3M™ Scotch-Weld™ EPX Polyurethane Adhesive DP609, Beige, 400 ml	6	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Polyurethane Adhesive DP610

Bond plastics, glass and painted metals with 3M™ Scotch-Weld™ Polyurethane Adhesive DP610 to give a clear, structural bond.

- Clear, non-yellowing bondlines
- Highly flexible adhesive
- 10 minute worklife with around 2 hours to handling strength



Product ID	Part Number	Product Name	MOQ	OU
7100200503	xxx	3M™ Scotch-Weld™ Polyurethane Adhesive DP610, Transparent, 48.5 ml	12	Each

3M™ Scotch-Weld™ Epoxy Adhesive DP760

3M™ Scotch-Weld™ Epoxy Adhesive 760 is a non-sag, rigid, two-part room temperature curing adhesive designed for use in applications that require especially high temperature resistance.

- High temperature resistance up to 230°C
- Open time of 45 to 60 minutes
- Reaches handling strength in 4 to 6 hours



Product ID	Part Number	Product Name	MOQ	OU
7100200504	DP760	3M™ Scotch-Weld™ Epoxy Adhesive DP760, White, 50 ml	12	Each
7100200505	DP760	3M™ Scotch-Weld™ Epoxy Adhesive DP760, White, 50 ml	12	Each
7100200506	DP760	3M™ Scotch-Weld™ Epoxy Adhesive DP760, White, 400 ml	6	Each
7100270163	DP760	3M™ Scotch-Weld™ Epoxy Adhesive DP760, White, Part A, 20 L	1	Drum
7100269955	DP760	3M™ Scotch-Weld™ Epoxy Adhesive DP760, White, Part B, 20 L	1	Drum

3M™ Scotch-Weld™ EPX Super Clear Acrylic Adhesive DP804

The Scotch-weld™ EPX™ Bonding System is a discharging system for mixing two-component mixed adhesives. The main agent and the curing agent with the cartridge are mixed and discharged by a special hand gun and a special nozzle.

- Easy mixing and apply with the help of the EPX gun.
- Easy to use
- 3 Minutes of working time. 4 minutes of handling time.



Product ID	Part Number	Product Name	MOQ	OU
7100200507	xxx	3M™ Scotch-Weld™ EPX Super Clear Acrylic Adhesive DP804, Transparent, 48.5 ml	12	Each
7100200508	DP80450	3M™ Scotch-Weld™ EPX Super Clear Acrylic Adhesive DP804, Transparent, 48.5 ml, Label2	12	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Epoxy Adhesive 3520

Adhesive to bond metal, glass, ceramic, wood and select plastics. Good flow properties. 3M's high-strength structural adhesives are fundamentally load-bearing formulations. Bond strength is often as strong as, or stronger than the materials joined.

- Adhesive to bond metal, glass, ceramic, wood and some plastics
- Good fluidity
- Excellent mechanical resistance

Product ID	Part Number	Product Name	MOQ	OU
7100183879	xxx	3M™ Scotch-Weld™ Epoxy Adhesive 3520, Transparent, 2 × 5 L, Kit	1	Kit
7100183880	xxx	3M™ Scotch-Weld™ Epoxy Adhesive 3520, Transparent, 300 ml	12	Kit
7100185158	xxx	3M™ Scotch-Weld™ Epoxy Adhesive 3520, Transparent, Part B/A, 2 L	1	Kit

3M™ Scotch-Weld™ Epoxy Adhesive 7260

The 3M™ Scotch-Weld™ B/A Epoxy Adhesive 7260 is a high performance, two-part toughened epoxy adhesive. This product is very durable with excellent adhesion to metals and thermoset plastics.

- High peel and shear strength for durable, long-lasting bonds
- Excellent adhesion to metallic surfaces and thermoset plastics
- Available with open times of up to 90 mins (Fast Cure) or 300 mins (standard)



Product ID	Part Number	Product Name	MOQ	OU
7000080008	7260	3M™ Scotch-Weld™ Epoxy Adhesive 7260, Black, Part B/A, 400 ml	6	Each
7100260721	7260	3M™ Scotch-Weld™ Epoxy Adhesive 7260, Grey, FC, NS, Part A, 18 L	1	Drum
7100260722	7260	3M™ Scotch-Weld™ Epoxy Adhesive 7260, Grey, FC, NS, Part B, 18 L	1	Drum
7000080037	7260	3M™ Scotch-Weld™ Epoxy Adhesive 7260FC, Black, Part B/A FC NS, 400 ml	6	Each

3M™ Scotch-Weld™ Structural Adhesive 7838

3M™ Scotch-Weld™ Structural Adhesive 7838 is a thixotropic two-part epoxy based adhesive. This adhesive is flexible and has excellent adhesion to metals, plastics and glass.

- Room temperature curing
- Cured adhesive bonds exhibit excellent flexibility and high adhesion to metals, plastics and glass
- Cured adhesive bonds exhibit good strength retention after ageing in hostile environments



Product ID	Part Number	Product Name	MOQ	OU
7100185187	xxx	3M™ Scotch-Weld™ Structural Adhesive 7838, Part A/B, 2 kg, Kit	1	Kit

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8010

3M™ Scotch-Weld™ Structural Plastic Adhesive DP8010 Blue is a two-part acrylic adhesive specially formulated to bond many low surface energy plastics, including many grades of polypropylene, polyethylene, and thermoplastic elastomers (TPEs) without special surface preparation.

- Creates strong bond on low surface energy plastics (LSE) such as polyolefin with minimal or no surface prep required
- Resists many chemicals, water, humidity and corrosion
- Formulated to bond multi-material assemblies such as LSE plastics, thermoplastics, composites and metals



Product ID	Part Number	Product Name	MOQ	OU
7100036717	xxx	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8010, Blue, 45 ml	12	Each
7100036719	xxx	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8010, Blue, 490 ml	6	Each

3M™ Scotch-Weld™ Epoxy Potting Compound DP270 Black

3M™ Scotch-Weld™ Epoxy Potting Compound 270 is a rigid, two-part epoxy adhesive potting compound. 1:1 mix ratio, 70 minute work life and handling strength in approximately 3 hours.

- 70 minute worklife
- Non-corrosive to copper
- Rigid potting compound



Product ID	Part Number	Product Name	MOQ	OU
7100200491	270B.48.5	3M™ Scotch-Weld™ Epoxy Potting Compound DP270, Black, 48.5 ml	12	Each
7100200492	xxx	3M™ Scotch-Weld™ Epoxy Potting Compound DP270, Black, 48.5 ml	12	Each
7100082565	xxx	3M™ Scotch-Weld™ Epoxy Potting Compound DP270, Black, 400 ml	6	Each
7000046463	xxx	3M™ Scotch-Weld™ Epoxy Potting Compound DP270, Black, Part A, 18.9 L	1	Canister
7000046439	xxx	3M™ Scotch-Weld™ Epoxy Potting Compound DP270, Black, Part B, 18.9 L	1	Canister

3M™ Scotch-Weld™ Epoxy Potting Compound DP270 Clear

3M™ Scotch-Weld™ Epoxy Potting Compound 270 is a rigid, two-part epoxy adhesive potting compound. 1:1 mix ratio, 70 minute work life and handling strength in approximately 3 hours.

- 70 minute worklife
- Non-corrosive to copper
- Rigid potting compound



Product ID	Part Number	Product Name	MOQ	OU
7100200493	DP2270C	3M™ Scotch-Weld™ Epoxy Potting Compound DP270, Clear, 48.5 ml	12	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Epoxy Adhesive DP420 Black

3M™ Scotch-Weld™ Epoxy Adhesive DP420 is a toughened, two-part epoxy structural adhesive that provides good strength along with high impact and fatigue resistance to meet demanding bonding challenges. 3M™ Scotch-Weld Epoxy Adhesive DP420 can replace mechanical fasteners, screws, rivets and spot welds in many applications.



- High peel and shear strength maintains lasting bond at high and low temperatures
- Toughened for impact and fatigue resistance
- 20 minute work life provides time for positioning and adjustment

Product ID	Part Number	Product Name	MOQ	OU
7100148731	DP420-1.7OZ-BLK	3M™ Scotch-Weld™ Epoxy Adhesive DP420, Black, 50 ml	12	Each
7100077148	420400B	3M™ Scotch-Weld™ Epoxy Adhesive DP420, Black, 400 ml	6	Each

3M™ Scotch-Weld™ Epoxy Adhesive DP420 Off-White

3M™ Scotch-Weld™ Epoxy Adhesive DP420 is a toughened, two-part epoxy structural adhesive that provides good strength along with high impact and fatigue resistance to meet demanding bonding challenges. 3M™ Scotch-Weld Epoxy Adhesive DP420 can replace mechanical fasteners, screws, rivets and spot welds in many applications.



- High peel and shear strength maintains lasting bond at high and low temperatures
- Toughened for impact and fatigue resistance
- 20 minute work life provides time for positioning and adjustment

Product ID	Part Number	Product Name	MOQ	OU
7100148736	DP420DUO	3M™ Scotch-Weld™ Epoxy Adhesive DP420, Off-White, 50 ml Duo-Pack	12	Each

3M™ Scotch-Weld™ Epoxy Adhesive DP420NS

3M™ Scotch-Weld™ Epoxy Adhesive DP420NS is a black, toughened, non-sag, two-part epoxy structural adhesive that provides good strength along with high impact and fatigue resistance to meet demanding bonding challenges. 3M™ Scotch-Weld Epoxy Adhesive DP420NS can replace mechanical fasteners, screws, rivets and spot welds in many applications.



- High peel and shear strength maintains lasting bond at high and low temperatures
- Toughened for impact and fatigue resistance
- 20 minute work life provides time for positioning and adjustment

Product ID	Part Number	Product Name	MOQ	OU
7100148758	DP420NS-1.7OZ-BLK	3M™ Scotch-Weld™ Epoxy Adhesive DP420NS, Black, 50 ml	12	Each
7100010680	xxx	3M™ Scotch-Weld™ Epoxy Adhesive DP420NS, Black, 400 ml	6	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Urethane Adhesive DP604NS

3M™ Scotch-Weld™ Urethane Adhesive 604 is a non-sag, two-component polyurethane adhesive. Rapid-setting, this urethane adhesive offers a fast, yet flexible solution that can be used for bonding dissimilar substrates, such as concrete, ceramic, wood, plastic, rubber and metal.

- Fast-curing adhesive delivers tough bonds quickly
- Non-sag properties for precise handling during application
- Low-temperature flexibility provides opportunity for adjustments



Product ID	Part Number	Product Name	MOQ	OU
7100148738	DP604NS-1.64OZ-BLK	3M™ Scotch-Weld™ Urethane Adhesive DP604NS, Black, 48.5 ml Duo-Pak	12	Each

3M™ Scotch-Weld™ Urethane Adhesive DP620NS

3M™ Scotch-Weld™ Urethane Adhesive 620NS is a flexible, two-part polyurethane based structural adhesive that performs well in numerous applications where some flexibility is needed. It effectively bonds to many substrates such as composites, metals, wood, and many plastics and rubbers, ceramics and glass (may require primer for durability).

- Versatile polyurethane adhesive has excellent impact resistance and easily adheres to a variety of substrates
- Low dispense viscosity; yet non-sagging after dispensing so adhesive stays where placed
- Low temperature flexibility and low shrinkage



Product ID	Part Number	Product Name	MOQ	OU
7100148737	xxx	3M™ Scotch-Weld™ Urethane Adhesive DP620NS, Black, 48.5 ml	12	Each
7000046372	xxx	3M™ Scotch-Weld™ Urethane Adhesive DP620NS, Black, 400 ml	24	Pack

3M™ Scotch-Weld™ Composite Urethane Adhesive DP6310NS

3M™ Scotch-Weld™ Multi-Material Composite Urethane Adhesive DP6310NS is a green, non-sag, two-component urethane for bonding a variety of composites, plastics, metals and wood. This flexible adhesive has excellent elongation and stress strain properties for durable bonding of composite parts and multi-material assemblies.

- Two part urethane paste delivers outstanding strength and performance
- Non-sag formulation resists running and slumping of adhesive
- Primerless to most surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100109829	xxx	3M™ Scotch-Weld™ Composite Urethane Adhesive DP6310NS, Green, 48.5 ml	12	Each
7100109830	xxx	3M™ Scotch-Weld™ Composite Urethane Adhesive DP6310NS, Green, 400 ml	6	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Composite Urethane Adhesive DP6330NS

3M™ Scotch-Weld™ Multi-Material Composite Urethane Adhesive DP6330NS is a green, non-sag, two-component urethane paste for bonding a variety of composites, plastics, metals and wood. This flexible adhesive has good energy absorption and fatigue properties for durable bonding of composite parts and multi-material assemblies.



- Two part urethane paste delivers outstanding strength and performance
- Non-sag formulation resists running and slumping of adhesive
- Primerless to most surfaces

Product ID	Part Number	Product Name	MOQ	OU
7100109828	xxx	3M™ Scotch-Weld™ Composite Urethane Adhesive DP6330NS, Green, 48.5 ml	12	Each
7100109827	xxx	3M™ Scotch-Weld™ Composite Urethane Adhesive DP6330NS, Green, 400 ml	6	Each
7100143961	6330NS5GALA	3M™ Scotch-Weld™ Composite Urethane Adhesive DP6330NS, Green, Part A, 18.9 L	1	Drum
7100143701	6330NS5GALB	3M™ Scotch-Weld™ Composite Urethane Adhesive DP6330NS, Green, Part B, 18.9 L	1	Drum

3M™ Scotch-Weld™ Epoxy Adhesive 7240 FR

3M Scotch Weld 7240 FR B/A epoxy adhesive is a toughened, two-part epoxy adhesive with a 2:1 mix ratio, 45 minute work life and handling strength in approximately 6 hours. This product is very durable and commonly used in applications in the transportation industry.



- Excellent environmental resistance tested in a variety of demanding conditions
- Contains 300 µm glass beads for accurate glue line control.
- Tested to FAR25 (vertical burn) and meets the 15 second self extinguishing requirement.

Product ID	Part Number	Product Name	MOQ	OU
7100042123	xxx	3M™ Scotch-Weld™ Epoxy Adhesive 7240 FR, Black, Part B/A, 54 L	1	Kit
7100042087	xxx	3M™ Scotch-Weld™ Epoxy Adhesive 7240 FR, Black, Part B/A, 400 ml	6	Each

3M™ Scotch-Weld™ Structural Plastic Adhesive DP8005 Black

3M™ Scotch-Weld™ Structural Plastic Adhesive 8005 is one of our 10:1 ratio, two-part acrylic based adhesive specially formulated to bond many low surface energy plastics. It will adhere many grades of polypropylene, polyethylene, and thermoplastic elastomers (TPE's) without special surface preparation.



- Ability to structural bond low surface energy plastics such as polyolefins, polypropylene, polyethylene and TPO's
- Excellent resistance to water and humidity combined with very good chemical resistance results in a bond that can withstand a variety of applications and conditions
- Cures at room temperature without heat or other chemicals to eliminate complex adhesion processes

Product ID	Part Number	Product Name	MOQ	OU
7100089475	xxx	3M™ Scotch-Weld™ Structural Plastic Adhesive DP8005, Black, 45 ml	12	Each
7100089476	xxx	3M™ Scotch-Weld™ Structural Plastic Adhesive DP8005, Black, 490 ml	6	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Structural Plastic Adhesive DP8005 Off-White

3M™ Scotch-Weld™ Structural Plastic Adhesive 8005 is one of our 10:1 ratio, two-part acrylic based adhesive specially formulated to bond many low surface energy plastics. It will adhere many grades of polypropylene, polyethylene, and thermoplastic elastomers (TPE's) without special surface preparation.

- Ability to structural bond low surface energy plastics such as polyolefins, polypropylene, polyethylene and TPO's
- Excellent resistance to water and humidity combined with very good chemical resistance results in a bond that can withstand a variety of applications and conditions
- Cures at room temperature without heat or other chemicals to eliminate complex adhesion processes



Product ID	Part Number	Product Name	MOQ	OU
7100240965	8005T490	3M™ Scotch-Weld™ Structural Plastic Adhesive DP8005, Beige, 490 ml	6	Each
7000080039	xxx	3M™ Scotch-Weld™ Structural Plastic Adhesive DP8005, Transparent, 2 L	2	Canister
7000080038	xxx	3M™ Scotch-Weld™ Structural Plastic Adhesive DP8005, White, 10 L	1	Each

3M™ Scotch-Weld™ Acrylic Adhesive DP8405NS

3M™ Scotch-Weld™ Acrylic Adhesive DP8405NS is a non-sag, toughened, two-part acrylic adhesive. This toughened product provides improved adhesion to many plastics and metals, including those with slightly oily surfaces. It is a durable product that features a fast rate of strength build to provide structural strength in just minutes.

- 5 minute work life with 20 minutes to structural strength
- Durable bond with excellent shear, peel and high impact strength
- Bonds to a variety of surfaces, including most metals and plastics



Product ID	Part Number	Product Name	MOQ	OU
7100009688	xxx	3M™ Scotch-Weld™ Acrylic Adhesive DP8405NS, Green, 45 ml	12	Each
7100011056	xxx	3M™ Scotch-Weld™ Acrylic Adhesive DP8405NS, Green, 490 ml	6	Each

3M™ Scotch-Weld™ Metal Bonder Acrylic Adhesive Bead Free 8407NS

3M™ Scotch-Weld™ Metal Bonder Acrylic Adhesive Bead Free 8407NS is a gray structural adhesive with high overlap shear and peel strength with good impact resistance and durability.

- Excellent strength and durability on bare metals, plastics, and other materials
- Toughened
- Outstanding peel and impact strength



Product ID	Part Number	Product Name	MOQ	OU
7100179264	xxx	3M™ Scotch-Weld™ Metal Bonder Acrylic Adhesive Bead Free 8407NS, Grey, Part A, 3.78 L	4	Canister
7100179442	xxx	3M™ Scotch-Weld™ Metal Bonder Acrylic Adhesive Bead Free 8407NS, Grey, Part A, 18.9 L	1	Drum

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Metal Bonder Acrylic Adhesive DP8407NS

3M™ Scotch-Weld™ Metal Bonder Acrylic Adhesive DP8407NS is a gray structural adhesive with high overlap shear and peel strength with good impact resistance and durability. This adhesive was designed to bond permanently to bare metals with minimal surface preparation, but also bonds well to wide variety of other materials, including most plastics.

- Bonds to a variety of substrates (especially bare metals) while resisting corrosion
- Withstands powder coat and paint bake cycles up to 400°F (204°C) for at least one hour
- Offers high shear, peel and impact strength for a tough and durable bond




Product ID	Part Number	Product Name	MOQ	OU
7100179482	xxx	3M™ Scotch-Weld™ Metal Bonder Acrylic Adhesive DP8407NS, Grey, 45 ml	12	Each
7100179480	DP8407-490ML	3M™ Scotch-Weld™ Metal Bonder Acrylic Adhesive DP8407NS, Grey, 490 ml	6	Each
7100105384	xxx	3M™ Scotch-Weld™ Metal Bonder Acrylic Adhesive DP8407NS, Grey, Part B, 18.9 L	1	Drum

3M™ Scotch-Weld™ Acrylic Adhesive DP8410NS

3M™ Scotch-Weld™ Acrylic Adhesive DP8410NS is a non-sag, tough, two-part acrylic adhesive. This toughened product provides improved adhesion to many plastics and metals, including those with slightly oily surfaces. It is a durable product that features a fast rate of strength build to provide structural strength in just minutes.

- 11 minute work life with 36 minutes to structural strength
- Durable bond with excellent shear, peel and high impact strength
- Bonds to a variety of surfaces, including most metals and plastics



Product ID	Part Number	Product Name	MOQ	OU
7100024055	xxx	3M™ Scotch-Weld™ Acrylic Adhesive DP8410NS, Green, 45 ml	12	Each
7100024045	xxx	3M™ Scotch-Weld™ Acrylic Adhesive DP8410NS, Green, 490 ml	6	Each

3M™ Scotch-Weld™ Acrylic Adhesive DP8425NS

3M™ Scotch-Weld™ Acrylic Adhesive DP8425NS is a non-sag, toughened, two-part acrylic adhesive. This toughened product provides improved adhesion to many plastics and metals, including those with slightly oily surfaces. It is a durable product that features a fast rate of strength build to provide structural strength in just minutes.

- 25 minute work life with 56 minutes to structural strength
- Durable bond with excellent shear, peel and high impact strength
- Bonds a variety of surfaces, including most metals and plastics



Product ID	Part Number	Product Name	MOQ	OU
7100078165	xxx	3M™ Scotch-Weld™ Acrylic Adhesive DP8425NS, Green, 45 ml Duo-Pak	12	Each
7100078166	xxx	3M™ Scotch-Weld™ Acrylic Adhesive DP8425NS, Green, 490 ml Duo-Pak	6	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Flexible Acrylic Adhesive DP8610NS

3M™ Scotch-Weld™ Flexible Acrylic Adhesive DP8610NS is a black, non-sag, low Odour, two-part acrylic adhesive. This high-elongation acrylic adhesive with structural strength is ideal for bonding dissimilar materials, thin panel applications where bondline read-through is a concern, or any other application where a flexible bond is needed.

- Highly flexible structural adhesive with greater than 200% elongation
- Minimizes bond line read-through and cure shrinkage to enable the use of thinner panels
- Alleviates stresses caused by dissimilar coefficients of thermal expansion



Product ID	Part Number	Product Name	MOQ	OU
7100233359	DP861045	3M™ Scotch-Weld™ Flexible Acrylic Adhesive DP8610NS, Black, 45 ml Duo-Pak	12	Each
7100232802	DP8610490	3M™ Scotch-Weld™ Flexible Acrylic Adhesive DP8610NS, Black, 490 ml Duo-Pak	6	Each

3M™ Scotch-Weld™ Flexible Acrylic Adhesive DP8625NS

3M™ Scotch-Weld™ Flexible Acrylic Adhesive DP8625NS is a black, non-sag, low Odour, two-part acrylic adhesive. This high-elongation acrylic adhesive with structural strength is ideal for bonding dissimilar materials, thin panel applications where bondline read-through is a concern, or any other application where a flexible bond is needed.

- High elongation and flexibility
- Bonds to a variety of surfaces with minimal surface prep
- Low Odour and non-flammable properties for a safer working environment compared to typical acrylic adhesives



Product ID	Part Number	Product Name	MOQ	OU
7100244478	DP862545	3M™ Scotch-Weld™ Flexible Acrylic Adhesive DP8625NS, Black, 45 ml Duo-Pak	12	Each
7100244477	DP8625490	3M™ Scotch-Weld™ Flexible Acrylic Adhesive DP8625NS, Black, 490 ml Duo-Pak	6	Each
7100244476	xxx	3M™ Scotch-Weld™ Flexible Acrylic Adhesive DP8625NS, Black, Part B, 5 Gallon Drum	1	Drum

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8705NS

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8705NS is a black, non-sag, low Odour, non-flammable two-part structural acrylic adhesive. 8705 is an improved version of 3M's low Odour acrylic adhesives, providing enhanced impact strength, peel resistance, flexibility, low temperature performance and worker safety.

- Low Odour, non-flammable and reduced toxicological hazard profile for a safer working environment compared to typical acrylic adhesives
- Bonds to a variety of substrates, including metals, painted surfaces, plastics and composites, with minimal surface preparation required, including for slightly oily surfaces
- Low temperature performance with structural strength down to -40°C



Product ID	Part Number	Product Name	MOQ	OU
7100245036	DP870545	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8705NS, Black, 45 ml Duo-Pak	12	Each
7100245039	DP8705490	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8705NS, Black, 490 ml Duo-Pak	6	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8710NS

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8710NS is a black, non-sag, low Odour, non-flammable two-part structural acrylic adhesive. 8710 is an improved version of 3M's low Odour acrylic adhesives, providing enhanced impact strength, peel resistance, flexibility, low temperature performance and worker safety.

- Low Odour, non-flammable and reduced toxicological hazard profile for a safer working environment compared to typical acrylic adhesives
- Bonds to a variety of substrates, including metals, painted surfaces, plastics and composites, with minimal surface preparation required, including for slightly oily surfaces
- Low temperature performance with structural strength down to -40°C



Product ID	Part Number	Product Name	MOQ	OU
7100233349	DP871045	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8710NS, Black, 45 ml Duo-Pak	12	Each
7100233348	DP8710490	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8710NS, Black, 490 ml Duo-Pak	6	Each

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8725NS

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8725NS is a black, non-sag, low Odour, non-flammable two-part structural acrylic adhesive. 8725 is an improved version of 3M's low Odour acrylic adhesives, providing enhanced impact strength, peel resistance, flexibility, low temperature performance and worker safety.

- Low Odour, non-flammable and reduced toxicological hazard profile for a safer working environment compared to typical acrylic adhesives
- Bonds to a variety of substrates, including metals, painted surfaces, plastics and composites, with minimal surface preparation required, including for slightly oily surfaces
- Low temperature performance with structural strength down to -40°C



Product ID	Part Number	Product Name	MOQ	OU
7100244858	DP872545	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8725NS, Black, 45 ml Duo- Pak	12	Each
7100244480	DP8725490	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8725NS, Black, 490 ml Duo- Pak	6	Each
7100244861	xxx	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8725NS, Black, Part B, 18.9 L	1	Drum

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8805NS

3M™ Scotch-Weld™ Low Odor Acrylic Adhesive DP8805NS is our standard low-odor, non-sag, toughened, two-part acrylic adhesive. This adhesive is an ideal choice for a wide variety of industrial and commercial applications since it reaches structural strength twice as fast as most other competitive acrylic adhesives with a comparable open time.

- 4 minute work life with 9 minutes to structural strength
- Low odor and non-flammable properties for a safer working environment compared to typical acrylic adhesives
- Durable finished bond with excellent shear and high impact strength



Product ID	Part Number	Product Name	MOQ	OU
7100098631	xxx	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8805NS, Green, 45 ml	12	Each
7100097636	xxx	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8805NS, Green, 490 ml	6	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8810NS

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8810NS is our low-Odour, non-sag, toughened, two-part acrylic adhesive. This adhesive is an ideal choice for a wide variety of industrial and commercial applications since it reaches structural strength twice as fast as most other competitive acrylic adhesives with a comparable open time.

- 10 minute work life with 38 minutes to structural strength
- Low Odour and non-flammable properties for a safer working environment compared to typical acrylic adhesives
- Durable bond with excellent shear, peel and high impact strength



Product ID	Part Number	Product Name	MOQ	OU
7100097574	xxx	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8810NS, Green, 45 ml	12	Each
7100075409	xxx	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8810NS, Green, 490 ml	6	Each
7100097704	DP88105	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8810NS, Green, Part B, 18.7 L	1	Drum

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8825NS

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8825NS is our low-Odour, non-sag, toughened, two-part acrylic adhesive. This adhesive is an ideal choice for a wide variety of industrial and commercial applications since it reaches structural strength twice as fast as most other competitive acrylic adhesives with a comparable open time.

- 25 minute work life with 56 minutes structural strength
- Low Odour and non-flammable properties for a safer working environment compared to typical acrylic adhesives
- Durable finished bond with excellent shear and high impact strength



Product ID	Part Number	Product Name	MOQ	OU
7100067291	xxx	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8825NS, Green, 18.7 L	1	Drum
7100067297	xxx	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8825NS, Green, 45 ml Duo-Pak	12	Each
7100068120	xxx	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8825NS, Green, 490 ml Duo-Pak	6	Each

3M™ Scotch-Weld™ Nylon Bonder Structural Adhesive DP8910NS

3M™ Scotch-Weld™ Nylon Bonder Structural Adhesive DP8910NS is a black, non-sag, non-flammable, two-part structural acrylic adhesive. 8910 creates a structural bond to polyamides (nylon), other engineered thermoplastics as well as aluminum and other metals without the need for extensive surface preparation such as plasma or flame treatment.

- Structurally bonds to nylon (polyamides) without the need for extensive surface preparation such as plasma or flame treatment
- Excellent adhesion to aluminum, stainless steel and other metals that are commonly joined to nylon
- Excellent high temperature performance at 85°C (185°F) and elevated humidity environments



Product ID	Part Number	Product Name	MOQ	OU
7100246046	xxx	3M™ Scotch-Weld™ Nylon Bonder Structural Adhesive DP8910NS, Black, 45 ml Duo-Pak	12	Each
7100246043	xxx	3M™ Scotch-Weld™ Nylon Bonder Structural Adhesive DP8910NS, Black, 490 ml Duo-Pak	6	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP810NS

3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP810NS is a non-sag, toughened two-part, room-temperature curing acrylic adhesive specially formulated to bond oily metals, plastics, and other surfaces. With lower odor and non-flammable properties, 3M™ Scotch-Weld™ Acrylic Adhesive DP810NS contributes to a safer work environment compared to typical acrylic adhesives.

- Low odour adhesive is ideal for any setting where harsh fumes or flammability are an issue
- Delivers non-sag formulation so adhesive stays where applied
- Provides high shear and peel strength and is toughened for impact resistance



Product ID	Part Number	Product Name	MOQ	OU
7100069366	xxx	3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP810NS, Tan, 400 ml Duo-Pak	6	Each

Adhesives, Sealants & Fillers

One Part Structural Adhesives

3M™ Scotch-Weld™ Epoxy Adhesive 2214 Regular

3M™ Scotch-Weld™ Epoxy Adhesive 2214 Regular is designed to provide high strength, higher temperature resistance and smooth bond lines. One part, 250°F (121°C) curing, 100% solids, these high performance adhesives are designed for bonding metals and many high temperature plastics such as fiberglass reinforced plastic, polyester and phenolics.

- Extreme de-aeration for very dense void free bond lines
- One part, 100% solids, heat curing adhesive
- Pliable paste consistency goes where needed with no sagging



Product ID	Part Number	Product Name	MOQ	OU
7000079791	xxx	3M™ Scotch-Weld™ Epoxy Adhesive 2214, Grey, 1 L	2	Canister
7000000811	xxx	3M™ Scotch-Weld™ Epoxy Adhesive 2214, Grey, 177 ml	6	Each

3M™ Scotch-Weld™ Epoxy Adhesive 2214 Hi-Temp New Formula

3M™ Scotch-Weld™ Epoxy Adhesive 2214 Hi-Temp New Formula is designed to provide high strength, high temperature resistance and smooth bond lines. This aluminum filled product is designed for use where higher strengths are required between 180°F to 350°F (-82°C to 177°C), especially on aluminum.

- One part, 100% solids, heat curing adhesive
- Pliable paste consistency goes where needed with no sagging
- improved performance at lower temperatures



Product ID	Part Number	Product Name	MOQ	OU
7000046474	xxx	3M™ Scotch-Weld™ Epoxy Adhesive 2214 Hi-Temp New Formula, Grey, 177 ml	6	Each

3M™ Polyurethane Wood Adhesive 5005

A high performance, one component, polyurethane adhesive that has been specifically developed for structural bonding of all types of wood, including those with a high moisture content, and also difficult to bond exotic woods.

- Solvent free
- Fast setting
- Outstanding resistance to water



Product ID	Part Number	Product Name	MOQ	OU
7000110554	xxx	3M™ Scotch-Weld™ Polyurethane Wood Adhesive 5005, Transparent, 310 ml	12	Each
7000110555	xxx	3M™ Scotch-Weld™ Polyurethane Wood Adhesive 5005, White, 310 ml	12	Each

Adhesives, Sealants & Fillers

Instant Adhesives

3M™ Scotch-Weld™ Instant Adhesive CA4

3M™ Scotch-Weld™ Instant Adhesive CA4 is a low viscosity instant adhesive. Our CA4 instant adhesive is formulated to give exceptional strength and impact resistance on a wide variety of substrates, including plastics and rubbers. Once applied, the glue has fast handling time and cure to keep jobs moving quickly.

- Bonds to a number of substrates, including plastics and rubbers
- High strength and impact resistance
- Reaches handling strength in under 40 seconds



Product ID	Part Number	Product Name	MOQ	OU
7000028586	xxx	3M™ Scotch-Weld™ Instant Adhesive CA4, Transparent, 29.5 ml	12	Bottle
7000028587	xxx	3M™ Scotch-Weld™ Instant Adhesive CA4, Transparent, 500 g	1	Bottle

3M™ Scotch-Weld™ Surface Insensitive Instant Adhesive SI Gel

3M™ Scotch-Weld™ Surface Insensitive Instant Adhesive SI Gel is a high viscosity gap filling instant adhesive.

- Surface insensitive for natural substances, leather, cork and wood.
- Gel viscosity
- Maximum gap filling



Product ID	Part Number	Product Name	MOQ	OU
7100034061	xxx	3M™ Scotch-Weld™ Surface Insensitive Instant Adhesive SI Gel, 20 g	20	Each
7100034009	xxx	3M™ Scotch-Weld™ Surface Insensitive Instant Adhesive SI Gel, 20 × 20 gr	20	Each
7100027510	xxx	3M™ Scotch-Weld™ Surface Insensitive Instant Adhesive SI Gel, 300 g	1	Bottle

3M™ Scotch-Weld™ Surface Insensitive Instant Adhesive SI1500

In order to address unique adhesive challenges, we developed 3M™ Scotch-Weld™ Surface Insensitive Instant Adhesive SI1500. This is a high viscosity instant adhesive that bonds rough, porous, contaminated and acidic substrates including wood, cardboard, veneer, fabric, cork and leather. This „instant glue“ is ideal for filling small gaps and its rapid cure time helps keep processes moving forward

- Surface insensitive for natural substances, leather, cork and wood
- High viscosity won't migrate into seams and crevices
- Adhesive is ideal for gap filling and bonding on a variety of surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100040836	xxx	3M™ Scotch-Weld™ Surface Insensitive Instant Adhesive SI1500, 10 × 20 gr	10	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Metal Instant Adhesive MC100

3M™ Scotch-Weld™ Metal Instant Adhesive MC100 is a methyl based, low viscosity instant adhesive for metals.

- Bonds metals, including galvanized surfaces
- Low viscosity
- Strong, durable and long lasting bond on a variety of substrates



Product ID	Part Number	Product Name	MOQ	OU
7100038866	xxx	3M™ Scotch-Weld™ Metal Instant Adhesive MC100, 500 g	1	Each

3M™ Scotch-Weld™ Plastic & Rubber Instant Adhesive PR100

3M™ Scotch-Weld™ Plastic & Rubber Instant Adhesive PR100 is a low viscosity instant adhesive.

- Plastics and Rubbers
- Low viscosity
- Low viscosity adhesive is easily applied from the bottle



Product ID	Part Number	Product Name	MOQ	OU
7100033657	xxx	3M™ Scotch-Weld™ Plastic & Rubber Instant Adhesive PR100, Transparent, 10 × 20 g	10	Each
7100033726	xxx	3M™ Scotch-Weld™ Plastic & Rubber Instant Adhesive PR100, Transparent, 10 × 50 g	10	Each
7100033708	xxx	3M™ Scotch-Weld™ Plastic & Rubber Instant Adhesive PR100, Transparent, 500 g	1	Each

3M™ Scotch-Weld™ Plastic & Rubber Instant Adhesive PR1500

We formulated 3M™ Scotch-Weld™ Plastic & Rubber Instant Adhesive PR1500 as a high-strength, high viscosity industrial adhesive. This rapid-setting cyanoacrylate cures at room temperature and is formulated to give exceptional performance on many difficult to bond substrates such as EPDM rubber, heavily plasticized PVC, ABS and nylon.

- Fast setting formulation helps keep processes moving quickly
- Instant adhesive works well on difficult to bond surfaces such as EPDM rubber and nylon
- Thick adhesive provides gap filling capabilities



Product ID	Part Number	Product Name	MOQ	OU
7100034078	xxx	3M™ Scotch-Weld™ Plastic & Rubber Instant Adhesive PR1500, Transparent, 50 g	10	Each
7100034071	xxx	3M™ Scotch-Weld™ Plastic & Rubber Instant Adhesive PR1500, Transparent, 500 g	1	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Super Fast Instant Adhesive SF100

3M™ Scotch-Weld™ Super Fast Instant Adhesive SF100 is a low viscosity, very fast curing instant adhesive. This cyanoacrylate adhesive relies less on surface moisture for cure speed than standard cyanoacrylates. It bonds to a variety of surfaces including leather, cork, wood, plastic and rubber.



- Super fast curing keeps projects moving forward and productivity high
- Flexible container to pinch a precise drop or squeeze a steady bead with the desired length and low viscosity helps produce thin bond layer for fast, effective curing
- Bonds to many surfaces including leather, cork, wood, plastic and rubber

Product ID	Part Number	Product Name	MOQ	OU
7100034060	xxx	3M™ Scotch-Weld™ Super Fast Instant Adhesive SF100, Transparent, 20 g	10	Each
7100034525	xxx	3M™ Scotch-Weld™ Super Fast Instant Adhesive SF100, Transparent, 50 g	10	Each
7100033985	xxx	3M™ Scotch-Weld™ Super Fast Instant Adhesive SF100, Transparent, 500 g	1	Each

3M™ Scotch-Weld™ Super Fast Instant Adhesive SF20

3M™ Scotch-Weld™ Super Fast Instant Adhesive SF20 is a very low viscosity, super-fast curing instant adhesive. This product meets Meets CID A-A-3097, Type II, Class 1. The low viscosity helps produce a thin bond layer for fast and effective curing on a variety of substrates including leather, cork, plastic and rubber.



- Super-fast curing keeps projects moving forward and productivity high
- Flexible container to pinch a precise drop or squeeze for a steady bead
- Bonds to a variety of substrates – leather, cork, plastic and rubber

Product ID	Part Number	Product Name	MOQ	OU
7100034279	xxx	3M™ Scotch-Weld™ Super Fast Instant Adhesive SF20, Transparent, 20 g	10	Each

3M™ Scotch-Weld™ General Purpose Instant Adhesive EC5

3M™ Scotch-Weld™ General Purpose Instant Adhesive EC5 is a fast setting, low viscosity instant adhesive.



- Bonds to a number of substrates
- Low viscosity
- General Purpose

Product ID	Part Number	Product Name	MOQ	OU
7100038865	xxx	3M™ Scotch-Weld™ General Purpose Instant Adhesive EC5, Transparent, 100 g	10	Each

Adhesives, Sealants & Fillers

Anaerobic Adhesives

3M™ Scotch-Weld™ Threadlocker TL42

3M™ Scotch-Weld™ Threadlocker TL42 provides vibration, corrosion and shock resistance for fasteners in assembled form. This medium-strength anaerobic adhesive is dispensed as a one-component product.

- Fills and seals threads completely to help stop corrosion, rust and leaks
- Helps maintain torque
- Removable with hand tools



Product ID	Part Number	Product Name	MOQ	OU
7100034072	xxx	3M™ Scotch-Weld™ Threadlocker TL42, Blue, 250 ml	5	Each

3M™ Scotch-Weld™ Threadlocker TL43

3M™ Scotch-Weld™ Threadlocker TL43 is an oil tolerant, general purpose, medium torque removal threadlocker.

- Blue medium torque removal
- Medium viscosity
- Oil tolerant. Prevents corrosion, vibration and provides shock resistance



Product ID	Part Number	Product Name	MOQ	OU
7100034008	xxx	3M™ Scotch-Weld™ Threadlocker TL43, Blue, 50 ml	10	Each

Adhesives, Sealants & Fillers

Curing Hot Melt Adhesives

3M™ Scotch-Weld™ PUR Easy 250 Cartridge Applicator

3M™ Scotch-Weld™ PUR Adhesive EZ250150 features a generous 150 seconds set time for complex assemblies and large parts and is effective across a wide range of service temperatures. It is ideal for bonding wood, plastics, glass and metal. This all-in-one adhesive and dispenser solution features fast, easy clean-up and handy accessories to meet all your dispensing needs.



- Long open and set times offers time to position parts
- Creates high-strength bonds that are plasticizer resistant
- Bonds to a variety of materials, including wood, plastics, glass and metal

Product ID	Part Number	Product Name	MOQ	OU
7000028622	xxx	3M™ Scotch-Weld™ PUR Easy 250 Cartridge Applicator, Europe 220V	1	Each

3M™ Scotch-Weld™ PUR Adhesive TE031

3M™ Scotch-Weld™ PUR Adhesive TE031 features rapid strength build-up and set time, producing strong bonds to a wide variety of plastics without drying or ventilation equipment. This extrudable grade adhesive is applied warm through a 3M™ Scotch-Weld™ PUR Adhesive Applicator or through bulk equipment specifically designed for use with PUR adhesives.



- Ideal for bonding polystyrene, polyacrylic and a wide variety of other plastics
- Rapid rate of strength build-up offers fast bonds for quick assembly
- Final cured strength over 6MPa

Product ID	Part Number	Product Name	MOQ	OU
7000000903	xxx	3M™ Scotch-Weld™ PUR Adhesive TE031, Black, 100 ml	5	Canister
7000028589	xxx	3M™ Scotch-Weld™ PUR Adhesive TE031, Off-White, 2 kg	6	Bag
7000000902	xxx	3M™ Scotch-Weld™ PUR Adhesive TE031, Off-White, 295 ml	5	Canister

3M™ Scotch-Weld™ PUR Adhesive TE100

3M™ Scotch-Weld™ PUR Easy Adhesive TE100 is a one-component, 100% solids, moisture curing, structural adhesive for bonding various substrates



- Medium set time.
- Creates high-strength bonds that are plasticizer resistant
- Bonds to a variety of materials, including wood and many plastics

Product ID	Part Number	Product Name	MOQ	OU
7000028590	xxx	3M™ Scotch-Weld™ PUR Adhesive TE100, Off-White, 295 ml	5	Bottle

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ PUR Adhesive TE200

3M™ Scotch-Weld™ PUR Easy Adhesive TE200 is a one-component, 100% solids, moisture curing, structural adhesive for bonding wood and select plastics.

- Fast set time.
- Thin bond lines for wood and select plastics.
- Bonds to a variety of materials, including wood and many plastics



Product ID	Part Number	Product Name	MOQ	OU
7000000905	xxx	3M™ Scotch-Weld™ PUR Adhesive TE200, Off-White, 295 ml	5	Bottle

3M™ Scotch-Weld™ PUR Adhesive TS230 Off-White

3M™ Scotch-Weld™ PUR Adhesive TS230 Off-White achieves a fast set time and is effective across a wide range of service temperatures. It is ideal for bonding materials including wood, ABS, PC, polyacrylic, polypropylene, polyethylene, FRP, aluminum and glass. This all-in-one adhesive and dispenser solution features fast, easy clean-up and handy accessories to meet all your dispensing needs.

- Professional grade adhesive for bonding a variety of materials, including wood, plastics, glass and metal
- 2.5-minute set time
- Creates high-strength bonds that are plasticizer resistant



Product ID	Part Number	Product Name	MOQ	OU
7000046534	xxx	3M™ Scotch-Weld™ PUR Adhesive TS230, Off-White, 2 kg	6	Bag
7000000898	xxx	3M™ Scotch-Weld™ PUR Adhesive TS230, Off-White, 295 ml	5	Bottle

3M™ Scotch-Weld™ PUR Adhesive TS230 Black

3M™ Scotch-Weld™ PUR Adhesive TS230 Off-White achieves a fast set time and is effective across a wide range of service temperatures. It is ideal for bonding materials including wood, ABS, PC, polyacrylic, polypropylene, polyethylene, FRP, aluminum and glass. This all-in-one adhesive and dispenser solution features fast, easy clean-up and handy accessories to meet all your dispensing needs.

- Professional grade adhesive for bonding a variety of materials, including wood, plastics, glass and metal
- 2.5-minute set time
- Creates high-strength bonds that are plasticizer resistant



Product ID	Part Number	Product Name	MOQ	OU
7000000906	xxx	3M™ Scotch-Weld™ PUR Adhesive TS230, Black, 295 ml	5	Bottle

Adhesives, Sealants & Fillers

Solvent-based Adhesives

3M™ HoldFast 70 Spray Adhesive

3M™ HoldFast 70 Cylinder Spray Adhesive is our extremely versatile, fast-tacking industrial grade spray adhesive with a unique wide-web spray pattern well suited for bonding a variety of substrates, including polystyrene. It requires a short dry time yet provides long open time to work at the best pace for your needs. It is an effective adhesive for waterproofing and protecting from moisture.

- Creates quick permanent bonds on many substrates, including polystyrene, drainboard, FRP panels, insulation, foams and fabrics
- Very fast-tacking adhesive bonds almost immediately and has a long bonding range
- Produces a unique heavy body spray pattern with low soak-in that is ideal for irregular or porous substrates



Product ID	Part Number	Product Name	MOQ	OU
7100138478	LT70HF	3M™ HoldFast 70 Spray Adhesive, Transparent, 12.4 kg	1	Each

3M™ Foam Fast 74 Spray Adhesive Orange

3M™ Foam & Fabric 74 Spray Adhesive is a fast-drying spray adhesive that bonds foam and fabric to a wide range of substrates. Its permanent bond provides fast results to keep projects moving ahead. The non-yellowing formula dispenses easily in a lace-spray pattern and applies directly onto surfaces and materials where needed.

- Designed specifically for foams and fabrics
- Dispenses with a lace-spray pattern optimized for foam bonding
- Provides professional, industrial strength for demanding applications



Product ID	Part Number	Product Name	MOQ	OU
7000116772	xxx	3M™ Foam Fast 74 Spray Adhesive, Orange, 500 ml	12	Canister

3M™ Foam Fast 74 Spray Adhesive Transparent

3M™ Foam & Fabric 74 Spray Adhesive is a fast-drying spray adhesive that bonds foam and fabric to a wide range of substrates. Its permanent bond provides fast results to keep projects moving ahead. The non-yellowing formula dispenses easily in a lace-spray pattern and applies directly onto surfaces and materials where needed.

- Designed specifically for foams and fabrics
- Dispenses with a lace-spray pattern optimized for foam bonding
- Provides professional, industrial strength for demanding applications



Product ID	Part Number	Product Name	MOQ	OU
7000046594	xxx	3M™ Foam Fast 74 Spray Adhesive, Transparent, 13 kg	1	Each

Adhesives, Sealants & Fillers

3M™ Repositionable 75 Spray Adhesive

3M™ Repositionable 75 Spray Adhesive is our versatile pressure sensitive adhesive spray, suitable for temporary holding or positioning of lightweight materials for display or prior to final assembly. It adheres in seconds, yet has an extra-long tack range that allows lifting and repositioning of materials.

- Finger-touch, targeted control ensures minimal overspray, waste, and cleanup
- Low soak-in formula allows it to bond delicate substrates without damaging the material
- Adhesive remains tacky to allow materials to be repositioned repeatedly



Product ID	Part Number	Product Name	MOQ	OU
7000116775	xxx	3M™ Repositionable 75 Spray Adhesive, Transparent, 500 ml	12	Canister

3M™ Hi-Tack 76 Spray Adhesive

3M™ Hi-Tack 76 Spray Adhesive is an industrial aerosol spray adhesive with high tack for one surface bonding applications.

- Fast aggressive tack
- Capable of one surface bonding
- Bonds many substrates such as polyethylene, rubber, fabric, felt, plastics and glass



Product ID	Part Number	Product Name	MOQ	OU
7000116779	xxx	3M™ Hi-Tack 76 Spray Adhesive, Creme, 500 ml	12	Canister

3M™ Rubber And Vinyl 80 Spray Adhesive

3M™ Rubber And Vinyl 80 Spray Adhesive is a high performance neoprene based contact aerosol spray adhesive.

- Bonds most rubber and vinyls
- High strength and high temperature resistance
- Can be used for automotive headliner



Product ID	Part Number	Product Name	MOQ	OU
7000116787	S80	3M™ Rubber And Vinyl 80 Spray Adhesive, Yellow, 500 ml	12	Canister

3M™ Hi-Strength 90 Spray Adhesive

3M™ Hi-Strength 90 Spray Adhesive is an extremely versatile, fast-drying spray adhesive that bonds strongly to a wide range of materials. Our permanent bond provides fast results to keep projects moving ahead. The spray formula is easy to dispense, offering a variable-width spray pattern, and applies directly onto surfaces and materials where needed.

- Provides professional, industrial strength for demanding applications
- Comes with a variable-width web spray pattern
- High strength, fast, contact type adhesive



Product ID	Part Number	Product Name	MOQ	OU
7000116790	xxx	3M™ Hi-Strength 90 Spray Adhesive, Transparent, 500 ml	12	Canister

Adhesives, Sealants & Fillers

3M™ Hi-Strength Postforming Adhesive 94CA

We developed 3M™ Hi-Strength Postforming 94 CA Cylinder Spray Adhesive to spray in a unique low telegraphing pebble spray pattern and produces high strength, postformable bonds to a variety of demanding substrates like decorative laminate, metal, and some rubbers. It is formulated to create strong, moisture and heat resistant bonds (up to 210F/98C).

- Formulated with high solids for increased coverage, reliable bonds and low soak-in
- Unique non-telegraphing spray pattern with post-formable strength
- Fast drying formula to help speed assembly.



Product ID	Part Number	Product Name	MOQ	OU
7100176092	xxx	3M™ Hi-Strength Postforming Adhesive 94CA, Transparent, 11.9 kg	1	Each

3M™ Hi-Temperature Polystyrene Foam Insulation 78HT Blue

3M™ Polystyrene Insulation 78 Spray Adhesive is a high strength, high temperature resistant, industrial grade spray adhesive.

- Doesn't degrade polystyrene
- Clean, precise application
- High temperature resistant bond



Product ID	Part Number	Product Name	MOQ	OU
7100138817	78BBONB	3M™ Hi-Temperature Polystyrene Foam Insulation 78HT, Blue, 12.4 kg	1	Each

3M™ Neoprene Contact Adhesive 10

Available in tubes, cans or pails, 3M™ Neoprene Contact Adhesive 10 is a versatile, solvent based adhesive. It offers high immediate handling strength and good heat resistance, and is commonly used for bonding most metals and plastics. It is also suitable for large surface panel or composite lamination.

- Adheres sheet metals, such as stainless steel, aluminum, cold rolled steel and many plastics to other various substrates
- High performance laminating adhesive
- Excellent moisture and heat resistance and will perform up to up to 300°F/148°C



Product ID	Part Number	Product Name	MOQ	OU
7000080206	xxx	3M™ Neoprene Contact Adhesive 10, Light Yellow, 1 L	6	Canister
7000080207	xxx	3M™ Neoprene Contact Adhesive 10, Light Yellow, 5 L	2	Canister
7000080208	xxx	3M™ Neoprene Contact Adhesive 10, Light Yellow, 20 L	1	Each

Adhesives, Sealants & Fillers

3M™ Neoprene High Performance Rubber and Gasket Adhesive 1300

3M™ Neoprene High Performance Rubber and Gasket Adhesive 1300 is a versatile, solvent based adhesive. It offers high immediate strength and good heat resistance, and is commonly used for bonding most rubber and gasket materials. It is also suitable for large area rubber sheeting applications, bumpers and more.



- Adheres neoprene, SBR, butyl, and other types of rubbers to other various substrates
- Excellent moisture and heat resistance and will perform up to up to 300°F/148°C
- Can be used as a contact or wet-bond adhesive

Product ID	Part Number	Product Name	MOQ	OU
7100036550	xxx	3M™ Neoprene High Performance Rubber and Gasket Adhesive 1300, Yellow, 1 L	6	Liter
7100034893	xxx	3M™ Neoprene High Performance Rubber and Gasket Adhesive 1300, Yellow, 5 L	10	Liter

3M™ Neoprene High Performance Contact Adhesive 1357

3M™ Neoprene High Performance Contact Adhesive 1357 is a high-performance contact adhesive that provides a long bonding range and initial strength.



- Extremely high strength and temperature resistance
- Fast rate of strength build
- Meets MMM-A-121

Product ID	Part Number	Product Name	MOQ	OU
7100038272	xxx	3M™ Neoprene High Performance Contact Adhesive 1357, Grey-Green, 1 L	6	Liter
7100038129	xxx	3M™ Neoprene High Performance Contact Adhesive 1357, Grey-Green, 20 L	20	Liter

3M™ Neoprene High Performance Rubber and Gasket Adhesive 2141

3M™ Neoprene Rubber And Gasket Adhesive 2141 is a light yellow, high strength, solvent type synthetic rubber-based brushable adhesive



- General purpose with excellent water, grease and oil resistance
- High strength adhesive with long tack range
- Bonds various rubbers, including neoprene and butyls to most substrates

Product ID	Part Number	Product Name	MOQ	OU
7000046346	xxx	3M™ Neoprene High Performance Rubber and Gasket Adhesive 2141, Gold-Yellow, 900 ml	12	Canister

Adhesives, Sealants & Fillers

3M™ Nitrile High Performance Plastic Adhesive 1099

3M™ Nitrile High Performance Plastic Adhesive 1099 dries quickly with an open time of approximately 40 minutes. Its assembled bonds are proven to be strong while resisting weathering as well as damage from water, oil and fuel. Additionally, it bonds well to plastics and vinyl, providing long-term adhesion as well as good resistance to plasticizer migration.



- High performance adhesive forms strong bonds on most vinyls and plastics
- Resists weathering, water, oil, plasticizer migration and fuels
- Provides strong, quick drying flexible bonds

Product ID	Part Number	Product Name	MOQ	OU
7000079821	xxx	3M™ Nitrile High Performance Plastic Adhesive 1099, Tan, 1 L	6	Canister
7000033732	xxx	3M™ Nitrile High Performance Plastic Adhesive 1099, Tan, 5 L	10	Liter
7000033731	xxx	3M™ Nitrile High Performance Plastic Adhesive 1099, Tan, 20 L	20	Liter
7000079905	xxx	3M™ Nitrile High Performance Plastic Adhesive 1099, Tan, 150 ml	12	Each
7000033748	xxx	3M™ Nitrile High Performance Plastic Adhesive 1099, Tan, 150 ml	12	Each
7000079824	xxx	3M™ Nitrile High Performance Plastic Adhesive 1099, Tan, 200 L, Drum	200	Liter

3M™ Nitrile High Performance Rubber and Gasket Adhesive 847

3M™ Nitrile High Performance Rubber and Gasket Adhesive 847 is a versatile, solvent based, high performance adhesive with comparatively low viscosity for easy application. It offers both good oil resistance and good heat resistance, and is commonly used for bonding most rubber and gasket materials.



- High performance adhesive intended to bond gaskets
- Adheres to nitrile rubber (BUNA), neoprene, SBR, butyl, leather, vinyl and various rubbers
- Excellent fuel, oil and water resistance

Product ID	Part Number	Product Name	MOQ	OU
7000079843	xxx	3M™ Nitrile High Performance Rubber and Gasket Adhesive 847HS, Brown, 20 L	1	Each

3M™ Nitrile High Performance Rubber and Gasket Adhesive 847 Brown

3M™ Nitrile High Performance Rubber and Gasket Adhesive 847 is a versatile, solvent based, high performance adhesive with comparatively low viscosity for easy application. It offers both good oil resistance and good heat resistance, and is commonly used for bonding most rubber and gasket materials.



- High performance adhesive intended to bond gaskets
- Adheres to nitrile rubber (BUNA), neoprene, SBR, butyl, leather, vinyl and various rubbers
- Excellent fuel, oil and water resistance

Product ID	Part Number	Product Name	MOQ	OU
7000079819	xxx	3M™ Nitrile High Performance Rubber and Gasket Adhesive 847, Brown, 1 L	6	Canister
7000079823	xxx	3M™ Nitrile High Performance Rubber and Gasket Adhesive 847, Brown, 5 L	2	Canister
7000079817	84720	3M™ Nitrile High Performance Rubber and Gasket Adhesive 847, Brown, 20 L, Drum	1	Each
7000079818	xxx	3M™ Nitrile High Performance Rubber and Gasket Adhesive 847, Brown, 150 ml	12	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ High Performance Industrial Plastic Adhesive 4693

3M™ High Performance Industrial Plastic Adhesive 4693 is a solvent-based, synthetic rubber adhesive.

- Excellent plastic adhesive
- Long tack range
- Water and heat resistant



Product ID	Part Number	Product Name	MOQ	OU
7000000923	xxx	3M™ Scotch-Weld™ High Performance Industrial Plastic Adhesive 4693, Light Amber, 18.9 L	1	Canister
7000046574	xxx	3M™ Scotch-Weld™ High Performance Industrial Plastic Adhesive 4693, Light Amber, 946 ml	12	Canister

3M™ Super 77™ Cylinder Multipurpose Spray Adhesive

3M™ Super 77™ Multipurpose Spray Adhesive is an extremely versatile, fast-drying, and transparent spray adhesive that bonds a wide range of lightweight materials. Our fast, permanent bond provides fast results to keep projects moving ahead. The spray formula is easy to dispense and apply directly onto surfaces and materials where needed.

- Versatile adhesive bonds a wide range of lightweight materials
- Fast, aggressive tack and low soak-in eliminates clamping and dry time
- Extended bond time allows 15 seconds to 30 minutes after application before attaching surfaces



Product ID	Part Number	Product Name	MOQ	OU
7000116822	xxx	3M™ Super 77™ Multipurpose Spray Adhesive, Beige, 20 L Canister	1	Drum
7100138125	xxx	3M™ Super 77™ Multipurpose Spray Adhesive, Transparent, 13.2 kg Cylinder	1	Each

3M™ Super 77™ Multipurpose Spray Adhesive

3M™ Super 77™ Multipurpose Spray Adhesive is an extremely versatile, fast-drying, and transparent spray adhesive that bonds a wide range of lightweight materials. Our fast, permanent bond provides fast results to keep projects moving ahead. The spray formula is easy to dispense and apply directly onto surfaces and materials where needed.

- Versatile adhesive bonds a wide range of lightweight materials
- Fast, aggressive tack and low soak-in eliminates clamping and dry time
- Extended bond time allows 15 seconds to 30 minutes after application before attaching surfaces



Product ID	Part Number	Product Name	MOQ	OU
7000116782	xxx	3M™ Super 77™ Multipurpose Spray Adhesive, Beige, 500 ml	12	Canister

Adhesives, Sealants & Fillers

Water-based Adhesives

3M™ Fastbond™ Contact Adhesive 30NF

3M™ Fastbond™ Contact Adhesive 30NF is a water-dispersed, high-strength adhesive that has high coverage, immediate bond strength, a long bonding range and good heat resistance. Our adhesive bonds most foamed plastics, plastic laminate, wood, plywood, wood veneer, and canvas to themselves and to each other.

- Bonds most foamed plastics, plastic laminate, wood, plywood and canvas to themselves and to each other
- Creates a very high strength, high temperature resistant bond with up to a 4 hour bonding range
- Adhesive can be applied by spray, brush or roller



Product ID	Part Number	Product Name	MOQ	OU
7000080239	xxx	3M™ Fastbond™ Contact Adhesive 30NF, 1 L	6	Canister
7000080246	xxx	3M™ Fastbond™ Contact Adhesive 30NF, 200 L	200	Liter
7100015462	xxx	3M™ Fastbond™ Contact Adhesive 30NF, Blue, 1 L	6	Canister
7000080243	xxx	3M™ Fastbond™ Contact Adhesive 30NF, Blue, 5 L	2	Canister
7000080245	xxx	3M™ Fastbond™ Contact Adhesive 30NF, Neutral, 20 L	1	Each
7000000917	xxx	3M™ Fastbond™ Contact Adhesive 30NF, Transparent, 18.9 L	1	Canister
7000080242	xxx	3M™ Fastbond™ Contact Adhesive 30NF, White, 5 L	2	Canister

3M™ Fastbond™ Insulation Adhesive 49

Bond lightweight materials like fiberglass insulation, felt, shoddy, paper and other materials to metal and many other surfaces with 3M™ Scotch-Weld™ Insulation Adhesive 49. Our adhesive is water-based, high solids, fast tacking, and pressure sensitive adhesive that's easy to spray, brush, roll or apply.

- Fast aggressive tack
- Passes ASTM E-84
- Apply to one surface and save time



Product ID	Part Number	Product Name	MOQ	OU
7000079968	xxx	3M™ Fastbond™ Insulation Adhesive 49, 2 L	3	Canister
7000079967	xxx	3M™ Fastbond™ Insulation Adhesive 49, 20 L, Drum	20	Liter

Adhesives, Sealants & Fillers

3M™ Fastbond™ Contact Adhesive 2000NF

Apply 3M™ Scotch-Weld™ Contact Adhesive 2000NF for immediate bonding and handling strength without force drying. Our adhesive's benefits include high heat resistance and high strength.

- Two-part activated water based contact adhesive
- Immediate bonding and handling strength without force drying
- Offers high heat resistance, high strength



Product ID	Part Number	Product Name	MOQ	OU
7000080250	xxx	3M™ Fastbond™ Contact Adhesive 2000NF Activator, 2 L	3	Canister
7000080254	xxx	3M™ Fastbond™ Contact Adhesive 2000NF Activator, 200 L, Drum	5	Drum
7100083354	xxx	3M™ Fastbond™ Contact Adhesive 2000NF, Blue, 17 L, Drum	1	Drum
7100029518	xxx	3M™ Fastbond™ Contact Adhesive 2000NF, Blue, 220 L Kit, 200L Base + 20L Activator	220	Liter
7100029348	xxx	3M™ Fastbond™ Contact Adhesive 2000NF, Neutral, 19 L Kit	19	Liter

3M™ Fast Tack Water Based Adhesive 1000NF

3M™ Fast Tack Water Based Adhesive 1000NF is a unique, water-based adhesive specially designed to deliver an effective combination of fast, heat resistant bonding, repositionability and high ultimate strength. Our adhesive is non-flammable, polychloroprene-free, which can contribute to lower insurance costs and increased workplace safety.

- Solventless, one-part adhesive requires no mixing for safe, easy handling
- Stable bond provides good heat resistance for long-term endurance
- Fast bonding for immediate handling strength to keep assembly processes moving



Product ID	Part Number	Product Name	MOQ	OU
7100011610	xxx	3M™ Fast Tack Water Based Adhesive 1000NF, Neutral, 3.78 L	4	Bottle
7100025154	xxx	3M™ Fast Tack Water Based Adhesive 1000NF, Neutral, 18.9 L	1	Canister
7100007793	1000NFP1	3M™ Fast Tack Water Based Adhesive 1000NF, Purple, 3.78 L	4	Each
7000046563	xxx	3M™ Fast Tack Water Based Adhesive 1000NF, Purple, 18.9 L	1	Case

Adhesives, Sealants & Fillers

Hot Melt Adhesives

3M™ Hot Melt Adhesive 3731

3M™ Hot Melt Adhesive 3731 delivers a strong, durable bond as a 100% solids, solvent-free adhesive. We formulated this adhesive to maintain a durable, reliable bond through high heat resistance, providing you with exceptional performance for a wide range of applications.



- Solvent-free and 100% solids adhesive that provides strong bonds
- Adhesive that offers long-term durability through high-temperature resistance
- Thermoplastic adhesive that offers the capability to bond to low surface energy (LSE) substrates

Product ID	Part Number	Product Name	MOQ	OU
7100031985	xxx	3M™ Hot Melt Adhesive 3731B, Off-White, 10 kg	1	Canister
7100020337	xxx	3M™ Hot Melt Adhesive 3731PG, Creme, 25 mm x 76 mm, 10 kg	1	Case
7100009195	xxx	3M™ Hot Melt Adhesive 3731Q, Creme, 16 mm x 203 mm, 5 kg	1	Case

3M™ Hot Melt Adhesive 3738

3M™ Hot Melt Adhesive 3738 delivers a strong, reliable bond for long-term durability and exceptional performance. We formulated our Hot Melt Adhesive 3738 as a 100% solids adhesive, ready to meet the demands of a wide range of applications.



- 100% solids adhesive that delivers strong, reliable bonds
- General purpose adhesive capable of bonding many different materials
- Manages high volume applications through high delivery rate

Product ID	Part Number	Product Name	MOQ	OU
7100020456	xxx	3M™ Hot Melt Adhesive 3738, Brown, 10 kg	1	Case
7100008738	xxx	3M™ Hot Melt Adhesive 3738Q, Brown, 5 kg	1	Case

3M™ Hot Melt Adhesive 3747

3M™ Hot Melt Adhesive 3747 provides a tough, reliable bond for a wide variety of applications. Formulated to have moderate heat resistance, our Hot Melt Adhesive 3747 offers you a bond that can withstand elevated temperatures without lifting or deformation, delivering long-term durability and exceptional performance.



- Get high strength durable bonding that can withstand elevated temperatures
- 100% solids adhesive that delivers strong, tough bonds
- Adheres to a wide variety of substrates to provide solutions for many applications

Product ID	Part Number	Product Name	MOQ	OU
7000000877	xxx	3M™ Hot Melt Adhesive 3747Q, Brown, 5 kg	1	Case

Adhesives, Sealants & Fillers

3M™ Hot Melt Adhesive 3748

3M™ Hot Melt Adhesive 3748 is a tough, flexible hot melt adhesive with exceptional low temperature thermal shock properties that is able to provide optimal adhesion in fluctuating temperatures. As a 100% solids thermoplastic resin, this hot melt adhesive offers excellent durability for a wide variety of applications.



- Exhibits excellent low temperature thermal shock properties for optimal, long-term adhesion
- Good heat resistance provides durability throughout fluctuating temperatures
- Outstanding electrical properties offers an ideal solution for electrical applications

Product ID	Part Number	Product Name	MOQ	OU
7100005566	xxx	3M™ Hot Melt Adhesive 3748, White, 25 mm x 76 mm, 10 kg	1	Each
7100044127	3748W	3M™ Hot Melt Adhesive 3748-B Off-White, Chips	1	Case
7000000878	xxx	3M™ Hot Melt Adhesive 3748Q, White, 16 mm x 200 mm, 5 kg	1	Case
7000000879	xxx	3M™ Hot Melt Adhesive 3748TC, White, 6 mm x 50 mm, 5 kg	1	Case

3M™ Hot Melt Adhesive 3748 VO

3M™ Hot Melt Adhesive 3748 VO is a 100% solids thermoplastic, general purpose adhesive. Our self extinguishing adhesive won't burn when the source of combustion is removed. It offers good thermal and electrical properties for printed wiring, circuit board and other electronic applications and is shock resistant for parts that are subject to vibration or other movement.



- Tough, flexible bond provides good thermal shock resistance
- Adheres to difficult-to-bond plastics such as polyolefins
- 100 percent solids bonds with negligible shrinking or contracting

Product ID	Part Number	Product Name	MOQ	OU
7000000887	xxx	3M™ Hot Melt Adhesive 3748V-O, Light Yellow, 6 mm x 200 mm, 5 kg	1	Case

3M™ Hot Melt Adhesive 3762

3M™ Hot Melt Adhesive 3762 is a 100% is an economical, fast-setting resin solid hot melt adhesive. It's designed for general purpose applications as well as manual and corrugated carton sealing and general packaging. When heated to its specified melt point this adhesive forms an aggressive hot tack that bonds to handling strength in seconds to help maintain high-tempo productivity.



- Aggressive hot tack rapidly achieves handling strength for packaging and other applications
- Medium open time allows for positioning and fit adjustment
- Securely bonds difficult to seal substrates such as lightly waxed surfaces

Product ID	Part Number	Product Name	MOQ	OU
7000046513	xxx	3M™ Hot Melt Adhesive 3762, Tan, 25 mm x 75 mm, 11 kg	1	Case
7100023053	xxx	3M™ Hot Melt Adhesive 3762Q, Beige, 16 mm x 200 mm, 5 kg	1	Case
7100020333	xxx	3M™ Hot Melt Adhesive 3762TC, Tan, 4.98 kg	1	Case

Adhesives, Sealants & Fillers

3M™ Hot Melt Adhesive 3762LM

3M™ Hot Melt Adhesive 3762LM is a 100% solids, fast-setting hot melt adhesive designed for packaging and shipping applications. It is ideal for bonding corrugated fiberboard cartons, wood, particle board, chipboard and foam. The recommended application temperature range is 250-270°F (121-132°C).

- Aggressive hot tack rapidly achieves handling strength



Product ID	Part Number	Product Name	MOQ	OU
7100025246	xxx	3M™ Hot Melt Adhesive 3762LMQ, Beige, 16 mm x 200 mm, 5 kg	1	Case

3M™ Hot Melt Adhesive 3764

Our 3M™ Hot Melt Adhesive 3764 is a clear, 100% solids thermoplastic adhesive capable of bonding to many plastics, including polyolefin. Formulated to be flexible at low temperatures, we designed this hot melt adhesive to deliver exceptional performance for a wide range of applications and industries.

- 100% solids thermoplastic adhesive allows for adjustment over time to meet different project demands
- Formulated to be flexible at low temperatures to ease modification and positioning during application
- Impact-resistant design delivers long-term durability



Product ID	Part Number	Product Name	MOQ	OU
7000000884	xxx	3M™ Hot Melt Adhesive 3764, Transparent, 16 mm x 200 mm, 10 kg	1	Case
7100008178	xxx	3M™ Hot Melt Adhesive 3764Q, Transparent, 16 mm x 200 mm, 5 kg	1	Case

3M™ Hot Melt Adhesive 3779

Our 3M™ Scotch-Weld™ Hot Melt Adhesive 3779 is an amber colored, high performance thermoplastic adhesive formulated for strong resistance to heat, impact, fuel, and oil, and is effective for use in electronic applications such as potting and wire tacking.

- Provides high heat resistance for a durable bond
- Resilient adhesive is fuel, oil, and impact resistant
- Multi-purpose adhesive works on a variety of substrates including some plastics



Product ID	Part Number	Product Name	MOQ	OU
7000000888	xxx	3M™ Hot Melt Adhesive 3779Q, Gold-Yellow, 16 mm x 200 mm, 5 kg	1	Case

Adhesives, Sealants & Fillers

3M™ Hot Melt Adhesive 3789

Our 3M™ Hot Melt Adhesive 3789 is a polyamide adhesive formulated to produce an impact-, fuel- and oil-resistant bond on plastics, vinyl, wood and other surfaces. We manufacture this strong adhesive product using a 100% solids, thermoplastic resin. This hot melt also offers good heat resistance (220°F/104°C) and an open bond time that allows for fit adjustment and positioning.



- Features impact resistance for durability
- Adhesive withstands fuel and oil exposure
- Provides good heat resistance (220°F/104°C)

Product ID	Part Number	Product Name	MOQ	OU
7100008737	xxx	3M™ Hot Melt Adhesive 3789, Brown, 5 kg	1	Case

3M™ Hot Melt Adhesive 3792

We manufacture 3M™ Hot Melt Adhesive 3792 with 100% solids, thermoplastic resin. It produces minimal odor when heated, helping to support a comfortable work environment. This adhesive offer fast and reliable performance when paired with our 3M™ Hot Melt Applicators that designed to meet your handheld application needs.



- Dries clear for clean appearance
- Open bond time allows for fit adjustment and positioning
- 3792: Clear, multi-purpose for wood, fabric, upholstery, and other lightweight materials

Product ID	Part Number	Product Name	MOQ	OU
7100020336	xxx	3M™ Hot Melt Adhesive 3792, Transparent, 5 kg	1	Case
7100020334	xxx	3M™ Hot Melt Adhesive 3792, Transparent, 25 mm x 76 mm, 10 kg	1	Case
7000000891	xxx	3M™ Hot Melt Adhesive 3792Q, Transparent, 16 mm x 200 mm, 5 kg	1	Case

3M™ Hot Melt Adhesive 3792LM

We manufacture 3M™ Hot Melt Adhesive 3792 with 100% solids, thermoplastic resin. It produces minimal odor when heated, helping to support a comfortable work environment. This adhesive offer fast and reliable performance when paired with our 3M™ Hot Melt Applicators that designed to meet your handheld application needs.



- Dries clear for clean appearance
- Open bond time allows for fit adjustment and positioning
- 3792: Clear, multi-purpose for wood, fabric, upholstery, and other lightweight materials

Product ID	Part Number	Product Name	MOQ	OU
7000000880	xxx	3M™ Hot Melt Adhesive 3792LMQ, Transparent, 16 mm x 200 mm, 5 kg	1	Case



Adhesives, Sealants & Fillers

3M™ Hot Melt Adhesive 6111

3M™ Sprayable Hot Melt Adhesive 6111HT is a high-strength, high-temperature-resistant adhesive used to bond most foams, fabrics, particle board and thin metal. This non-volatile, 100% solids sprayable thermoplastic adhesive requires no drying time with minimal overspray, providing a more sustainable solution for increasing productivity. Available in blue and tan.



- Sprayable, 100% solids adhesive without volatiles
- Offers excellent adhesion to polypropylene and other low surface energy (LSE) plastics
- Extended open time allows for large surface assembly

Product ID	Part Number	Product Name	MOQ	OU
7100023018	6111HT	3M™ Hot Melt Adhesive 6111HTB, Beige, 19 mm x 19 mm, 10 kg	1	Case

Adhesives, Sealants & Fillers

Adhesive Sealants

3M™ Adhesive Sealant 740 UV

3M™ Adhesive Sealant 740 UV is a single-component, moisture-curing, elastomeric, isocyanate-free sealant. This cosmetic sealant offers exceptional UV resistance and long term flexibility.



- High performance sealing
- Excellent UV resistance
- Permanently elastic to allow joint movement

Product ID	Part Number	Product Name	MOQ	OU
7100077297	xxx	3M™ Adhesive Sealant 740, White, 600 ml	12	Each
7100078074	xxx	3M™ Adhesive Sealant 740UV, White, 290 ml	12	Each

3M™ Hybrid Adhesive Sealant 760

3M™ Hybrid Adhesive Sealant 760 is a single component, high strength, elastomeric sealant. This hybrid technology is paintable when wet and will not degrade when exposed to UV.



- Excellent adhesion
- Paintable when wet
- Above/below water line use

Product ID	Part Number	Product Name	MOQ	OU
7100050336	xxx	3M™ Hybrid Adhesive Sealant 760, Black, 31 kg	1	Each
7000032428	xxx	3M™ Hybrid Adhesive Sealant 760, Black, 295 ml	12	Each
7000061767	xxx	3M™ Hybrid Adhesive Sealant 760, Black, 600 ml	12	Each
7100062075	xxx	3M™ Hybrid Adhesive Sealant 760, Black, Plastic Cartridge, 290 ml	12	Each
7000032429	xxx	3M™ Hybrid Adhesive Sealant 760, Grey, 295 ml	12	Each
7000061768	xxx	3M™ Hybrid Adhesive Sealant 760, Grey, 600 ml	12	Each
7100062076	xxx	3M™ Hybrid Adhesive Sealant 760, Grey, Plastic Cartridge, 290 ml	12	Each
7000032427	xxx	3M™ Hybrid Adhesive Sealant 760, White, 295 ml	12	Each
7000032430	760600W	3M™ Hybrid Adhesive Sealant 760, White, 600 ml	12	Each
7000061766	xxx	3M™ Hybrid Adhesive Sealant 760, White, 600 ml	12	Each
7100062077	xxx	3M™ Hybrid Adhesive Sealant 760, White, Plastic Cartridge, 290 ml	12	Each

Adhesives, Sealants & Fillers

3M™ Hybrid Adhesive Sealant 780

3M™ Hybrid Adhesive Sealant 780 is a single component elastomeric sealant that does not contain isocyanate. Curing rapidly under the effect of atmospheric humidity to form a flexible and resistant joint with very good adhesion on most materials.

- Isocyanate free
- Excellent adhesion to most materials
- Ideal for sealing and bonding multi-material applications



Product ID	Part Number	Product Name	MOQ	OU
7000077312	xxx	3M™ Hybrid Adhesive Sealant 780, Black, 295 ml	12	Each
7000077253	xxx	3M™ Hybrid Adhesive Sealant 780, Grey, 295 ml	12	Each
7000077254	xxx	3M™ Hybrid Adhesive Sealant 780, White, 295 ml	12	Each

3M™ Marine Adhesive Sealant 4000 UV

3M™ Marine Adhesive Sealant 4000 UV is a one-part adhesive sealant that cures to form a firm, rubbery, waterproof seal.

- Very High Strength
- Excellent UV resistance for glazing applications
- Above/Below waterline use



Product ID	Part Number	Product Name	MOQ	OU
7000095179	xxx	3M™ Marine Adhesive Sealant 4000UV, White, 295 ml	12	Each

3M™ Marine Adhesive Sealant 4200FC

3M™ Marine Fast Cure General Purpose Adhesive Sealant 4200FC is a one-part general all-purpose polyurethane that chemically reacts with moisture to give a flexible bond with good adhesion on most materials

- Forms a flexible seal on most materials
- Certified in accordance with the Marine Equipment Directive (MED 96/98/EC) (valid to 6th March 2017 on current certificate)
- Tack-free in 1 hour and typically cures in 24 hours



Product ID	Part Number	Product Name	MOQ	OU
7000079890	xxx	3M™ Marine Adhesive Sealant 4200FC, Black, 310 ml	12	Each
7000079889	xxx	3M™ Marine Adhesive Sealant 4200FC, White, 310 ml	12	Each

Adhesives, Sealants & Fillers

3M™ Marine Adhesive Sealant 5200

3M™ Marine Adhesive Sealant 5200 is extremely strong and retains its strength above or below water line. Stays flexible too - allows for structural movement. Has excellent resistance to weathering and salt water.

- Very High Strength
- Watertight bonds
- Above/Below waterline use



Product ID	Part Number	Product Name	MOQ	OU
7100082438	xxx	3M™ Marine Adhesive Sealant 5200, Black, 295 ml, PN06504	12	Each
7100082436	xxx	3M™ Marine Adhesive Sealant 5200, Mahogany, 295 ml, PN06502	12	Each
7100082716	xxx	3M™ Marine Adhesive Sealant 5200, White, 295 ml, PN06500	12	Each
7100082441	PN06520	3M™ Marine Adhesive Sealant 5200FC, White, 295 ml, PN06520	12	Each

3M™ Polyurethane Adhesive Sealant 540

3M™ Polyurethane Adhesive Sealant 540 is a one component, polyurethane designed as a flexible sealant for transportation, metal working and many other applications.

- Flexible product for sealing applications
- Low modulus product that is great for sealing between different materials
- Paintable when dry



Product ID	Part Number	Product Name	MOQ	OU
7000070288	xxx	3M™ Polyurethane Adhesive Sealant 540, Black, 310 ml	12	Each
7000077267	xxx	3M™ Polyurethane Adhesive Sealant 540, Black, 400 mL	12	Each
7000070300	xxx	3M™ Polyurethane Adhesive Sealant 540, Black, 600 ml	12	Each
7000070299	xxx	3M™ Polyurethane Adhesive Sealant 540, Black, 600 ml	12	Each
7000070298	xxx	3M™ Polyurethane Adhesive Sealant 540, Grey, 310 ml	12	Each
7000033026	xxx	3M™ Polyurethane Adhesive Sealant 540, Grey, 600 ml	12	Each
7000070301	xxx	3M™ Polyurethane Adhesive Sealant 540, Grey, 600 ml	12	Each
7000077333	xxx	3M™ Polyurethane Adhesive Sealant 540, Orange, 310 ml	12	Each
7000070297	xxx	3M™ Polyurethane Adhesive Sealant 540, White, 310 ml	12	Each
7000077265	xxx	3M™ Polyurethane Adhesive Sealant 540, White, 310 ml	12	Each
7000077268	xxx	3M™ Polyurethane Adhesive Sealant 540, White, 400 ml	12	Each
7000033379	xxx	3M™ Polyurethane Adhesive Sealant 540, White, 600 ml	12	Pack
7000077193	xxx	3M™ Polyurethane Adhesive Sealant 540, White, 600 ml	12	Each

Adhesives, Sealants & Fillers

3M™ Polyurethane Adhesive Sealant 551

3M™ Polyurethane Adhesive Sealant 551 is a long open time polyurethane designed for cosmetically sealing and bonding of many applications including marine and specialty vehicle markets.



- Multi-purpose adhesive sealant
- Medium Strength
- 2-3 Hour Skin Time

Product ID	Part Number	Product Name	MOQ	OU
7100001806	xxx	3M™ Polyurethane Adhesive Sealant 551, Black, 600 ml	12	Each

3M™ Polyurethane Adhesive Sealant 560

Use 3M™ Polyurethane Adhesive Sealant 560 to bond numerous materials together, including plastics, FRP, SMC, aluminium, steel, coated metal, and wood. Our very strong adhesive is ideal in circumstances where additional bonding and holding strength is required, including panel bonding and much more.



- Panel Bonding Adhesive
- Very High Strength
- Smoke and Flame Rated, 50 minute skin time

Product ID	Part Number	Product Name	MOQ	OU
7000077274	xxx	3M™ Polyurethane Adhesive Sealant 560, Black, 25 kg	44	Each
7000070289	xxx	3M™ Polyurethane Adhesive Sealant 560, Black, 310 ml	12	Each
7000032419	xxx	3M™ Polyurethane Adhesive Sealant 560, Black, 600 ml	12	Each
7000061750	xxx	3M™ Polyurethane Adhesive Sealant 560, Grey, 310 ml	12	Each
7000061752	xxx	3M™ Polyurethane Adhesive Sealant 560, Grey, 600 ml	12	Each
7000061749	xxx	3M™ Polyurethane Adhesive Sealant 560, White, 310 ml	12	Each
7000077229	xxx	3M™ Polyurethane Adhesive Sealant 560, White, 600 ml	12	Each
7000077275	xxx	3M™ Polyurethane Adhesive Sealant 560, White, 600 ml	12	Each
7100198014	xxx	3M™ Polyurethane Adhesive Sealant 560, White, 600 ml, Sausage Pack	12	Each

Adhesives, Sealants & Fillers

3M™ Polyurethane Adhesive Sealant Fast Cure 550



3M™ Polyurethane Adhesive Sealant 550 FC is a fast curing polyurethane designed to seal and bond many substrates in a wide variety of applications.

- Multi-purpose adhesive sealant
- Paintable when dry
- Above/Below waterline use

Product ID	Part Number	Product Name	MOQ	OU
7000077271	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, 310 ml	12	Each
7000077331	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, 310 ml	12	Each
7000077272	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, 400 ml	12	Each
7000032443	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, Black, 310 ml	12	Each
7000061786	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, Black, 310 ml	12	Each
7000077270	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, Black, 310 ml	12	Each
7000077380	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, Black, 400 ml	12	Each
7000032445	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, Black, 600 ml	12	Each
7000061788	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, Black, 600 ml	12	Each
7000061787	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, Green, 310 ml	12	Each
7000032444	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, Grey, 310 ml	12	Each
7000032446	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, Grey, 600 ml	12	Pack
7000061789	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, Grey, 600 ml	12	Each
7000032442	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, White, 310 ml	12	Each
7000061785	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, White, 310 ml	12	Each
7000033364	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, White, 600 ml	12	Pack
7000077273	xxx	3M™ Polyurethane Adhesive Sealant Fast Cure 550, White, 600 ml	12	Each

3M™ Polyurethane Construction Sealant 525

3M™ Polyurethane Construction Sealant 525 is an adhesive sealant which cures to form a flexible and resilient bond with very good adhesion on most materials.



- Excellent for sealing in construction applications according to the intended use
- Paintable when dry
- 90-150 minute skin time

Product ID	Part Number	Product Name	MOQ	OU
7000061778	xxx	3M™ Polyurethane Construction Sealant 525, White, 600 ml	360	Each

Adhesives, Sealants & Fillers

3M™ Polyurethane Glass Adhesive Sealant 590

3M™ Polyurethane Glass Adhesive Sealant 590 is a fast curing one-component, high viscosity polyurethane sealant for bonding windshields and other substrates requiring high strength.

- Structural glass bonding
- Crash tested (FMVSS 212)
- 3 Hour Drive-Away Time, 30 minute skin time



Product ID	Part Number	Product Name	MOQ	OU
7000032420	xxx	3M™ Polyurethane Glass Adhesive Sealant 590, Black, 310 ml	12	Each
7000061753	xxx	3M™ Polyurethane Glass Adhesive Sealant 590, Black, 310 ml	12	Each
7000033372	xxx	3M™ Polyurethane Glass Adhesive Sealant 590, Black, 600 ml	12	Pack
7000077228	xxx	3M™ Polyurethane Glass Adhesive Sealant 590, Black, 600 ml	12	Each

3M™ Scotch-Seal™ Industrial Sealant 800

3M™ Scotch-Seal™ Industrial Sealant 800 is a reddish brown, brushable sealant that air dries to a flexible seal. This sealant adheres to many metallic surfaces and once dried, resists water, oils detergents and fuel. Additionally, this product has a broad, useful temperature range of -65°F / -54°C to 200°F / 93°C.

- Reddish brown, brushable sealant
- Creates durable, long-lasting, flexible and rubbery seal
- 5-10 minute tack-free time for fast application



Product ID	Part Number	Product Name	MOQ	OU
7000000793	xxx	3M™ Scotch-Seal™ Industrial Sealant 800, Reddish Brown, 3.785 ml	4	Canister
7000000792	xxx	3M™ Scotch-Seal™ Industrial Sealant 800, Reddish Brown, 148 ml	36	Bottle

3M™ Scotch-Seal™ Metal Sealant 2084

3M™ Scotch-Seal™ Metal Sealant 2084 is a one-part aluminium colored, general purpose, medium viscosity sealant

- Seals metal to glass in windows and doors
- Resists weather, water, oil, and gasoline
- Water, oil and fuel resistant



Product ID	Part Number	Product Name	MOQ	OU
7000046343	xxx	3M™ Scotch-Seal™ Metal Sealant 2084, Silver, 148 ml Tube	36	Each

Adhesives, Sealants & Fillers

3M™ Scotch-Seal™ Preformed Sealant Strip R79

Scotch-Seal™ Preformed Sealant Strip R79 Preformed Sealant Strip is a synthetic rubber based, permanently soft sealant in preformed strip. It develops excellent adhesion when held in compression.



- High adhesive strength with a service temperature range of -29°C to 135°C
- Excellent water and weathering resistance
- Non-curing, ready once applied

Product ID	Part Number	Product Name	MOQ	OU
7000079848	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip R79, 6 mm x 20 m	4	Roll

3M™ Scotch-Weld™ Preformed Sealant Strip 5313

3M™ Scotch-Weld™ Preformed Sealant Strip 5313 is a tacky solid extrusion based on a synthetic rubber. The adhesive strength of 5313 is sufficient to cause cohesive failure of the sealer before loss of adhesion to the substrate, when pulled in tension.



- Excellent water and weather resistance
- Pliable synthetic sealant for easy sealing and gap filling
- Non-curing, ready once applied

Product ID	Part Number	Product Name	MOQ	OU
7000079808	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, 4 mm x 80 m	5	Roll
7000079796	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, 4 mm x 90 m	2	Roll
7000079806	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, 4 mm x 112 m	2	Roll
7000079797	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, 6 mm x 5 m	15	Roll
7000033722	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, 20 mm x 10 m x 2 mm	10	Roll
7000079786	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, 20 mm x 35 m x 1 mm	60	Roll
7000079807	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, 25 mm x 50 m x 2 mm	2	Roll
7000033721	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, 50 mm x 25 m	4	Roll
7000079784	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, Diameter 4 mm x 11 m	15	Roll
7000079781	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, Diameter 6 mm x 25 m	10	Roll
7000079794	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, Diameter 7 mm x 15 mm x 2 mm	15	Roll
7000079798	xxx	3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, Diameter 8 mm x 6 m	15	Roll

Adhesives, Sealants & Fillers

Applicator Nozzles & Tips

3M™ Scotch-Weld™ EPX Mixing Nozzles

Choose the 3M™ Scotch-Weld™ EPX Square Gold Mixing Nozzle for efficient application of our 1:1 and 2:1 200/400mL 3M™ Scotch-Weld™ Structural Adhesive Duo-Pak Cartridges.



- Designed for use with 1:1 and 2:1 48.5/50mL 3M™ Scotch-Weld™ Structural Adhesive Duo-Pak Cartridges
- Provides thorough mixing and precise placement of adhesive
- Tapered tip can be cut for bead size

Product ID	Part Number	Product Name	MOQ	OU
7000028616	QUADRO400OLD	3M™ Scotch-Weld™ EPX Mixing Nozzle, Gold, 1:1, 400 ml	36	Each
7100304367	xxx	3M™ Scotch-Weld™ EPX Mixing Nozzle, Orange Helical, 10:1, 490 ml, High Throughput	36	Each
7100262488	NOZ-GR-2:1/1:1	3M™ Scotch-Weld™ EPX Mixing Nozzle, Square Green, 1:1 and 2:1, 48.5 ml and 50 ml	36	Each
7100301496	xxx	3M™ Scotch-Weld™ EPX Mixing Nozzle, Square, 10:1, 45 ml	72	Each
7100148766	MXNZLHEL	3M™ Scotch-Weld™ EPX Mixing Nozzle, White Helical, 48.5 ml and 50 ml	72	Each
7000061797	D200/400	3M™ Scotch-Weld™ EPX Mixing Nozzle, for 200 ml and 400 ml cartridges	36	Each

3M™ Scotch-Weld™ Structural Adhesive Nozzle

3M™ Scotch-Weld™ Structural Adhesive Nozzles are for use with 3M EPX Duo-Pak adhesives to ensure correct mixing of adhesive parts. Nozzle is matched to adhesive.



- Get high performance adhesive matching
- Use with 3M™ EPX Duo-Pak adhesives
- Apply to low volume applications

Product ID	Part Number	Product Name	MOQ	OU
7000031234	xxx	3M™ High Temperature Nozzles for PUR EZ250, Sample, 5 per bag	1	Bag
7000043674	xxx	3M™ Scotch-Weld™ Structural Adhesive Nozzle, 400 ml, MC 10-24-02	36	Each

Adhesives, Sealants & Fillers

Electric Applicators

3M™ Hot Melt Applicators

3M™ Hot Melt Applicators are designed to help improve productivity, lower costs and minimize waste in industrial applications. From high volume to detail work, 3M™ Hot Melt Applicators ensure optimum performance through melt-on-demand or progressive feed technology to meet your production deadlines.



- Lightweight designs offer easy handling
- Uniquely designed for 3M™ Hot Melt adhesives sticks
- Meet the needs of low and high volume dispensing

Product ID	Part Number	Product Name	MOQ	OU
7100255832	xxx	3M™ Hot Melt Applicators TC/TC-Q LT, 220V, Gen II, European Plug	1	Each
7100255955	xxx	3M™ Hot Melt Applicators TC/TC-Q LT, 240V, Gen II, United Kingdom Plug	1	Each
7100255953	xxx	3M™ Hot Melt Applicators TC/TC-Q, 220V, Gen II, European Plug	10	Each
7100255954	APPL TC/TCQ240	3M™ Hot Melt Applicators TC/TC-Q, 240V, Gen II, United Kingdom Plug	10	Each

Application Accessories

3M™ Scotch-Weld™ EPX Manual Applicators and Plungers

3M™ Scotch-Weld™ EPX Plunger for Manual Applicator. For use with both 1:1 and 2:1 200mL cartridges.

- Designed for use with our 50mL 3M™ Scotch-Weld™ Duo-Pak Cartridges
- Provides exact ratio of components
- Approved accessory for 3M™ Scotch-Weld™ EPX Applicator



Product ID	Part Number	Product Name	MOQ	OU
7000006768	xxx	3M™ Scotch-Weld™ EPX Manual Applicators and Plungers, Plunger Black, 1:1	5	Each
7000062909	xxx	3M™ Scotch-Weld™ EPX Manual Applicators and Plungers, Plunger, 10:1 Plunger, 45 ml	10	Each

Adhesives, Sealants & Fillers

Adhesion Promoters

3M™ Adhesion Promoter 111

3M™ Adhesion Promoter 111 is an isopropyl alcohol based adhesion promoter for use in conjunction with 3M™ VHB™ Tape. It is a one step solution for cleaning and providing better and faster adhesion on surfaces that are fairly clean.

- Alcohol based adhesion promoter
- Increased tape adhesion build rate at both normal and cooler temperatures
- For use on many painted and bare metal substrates.



Product ID	Part Number	Product Name	MOQ	OU
7000049700	AP11119	3M™ Adhesion Promoter AP111, Transparent, 18.9 L	1	Canister
7000001323	xxx	3M™ Adhesion Promoter AP111, Transparent, 250 ml	4	Bottle

3M™ Adhesion Promoter AP596

Use 3M™ Adhesive Promoter AP596 to for windscreen or other applications. Our colourless adhesion promoter can be used with 3M SMP sealants or silicones. It's suitable for various surfaces including tinted and fritted glass, acrylic (PMMA), polyester and PVC.

- Install windscreens quickly and easily
- Clear Formulation
- Use with tinted and fritted glass, acrylic (PMMA), polyester and PVC



Product ID	Part Number	Product Name	MOQ	OU
7000061757	xxx	3M™ Adhesion Promoter AP596, Transparent, 1 L	8	Bottle

3M™ All Purpose Sealant Primer P591

3M™ All Purpose Sealant Primer P591 is a black primer that increases adhesion with polyurethane and SMP adhesive sealants.

- Promotes adhesion and improves bond integrity
- Blocks UV rays
- Used on glass with ceramic silk-screen printing and PMMA



Product ID	Part Number	Product Name	MOQ	OU
7100158584	xxx	3M™ Fritted Glass Primer P591, 1 L	8	Each
7100158521	P591250	3M™ Fritted Glass Primer P591, Black, 250 ml, Bottle	12	Each

Adhesives, Sealants & Fillers

3M™ Hybrid Structural Tape Activator

3M™ Hybrid Structural Tape Activator works with our tape as complete system that allows you to design without limits.

- Required with 3M™ Hybrid Structural Tape.
- 3M™ Hybrid Structural Tape blends the strength and performance of a structural adhesive.
- Solvent based liquid activator that can be applied multiple ways.



Product ID	Part Number	Product Name	MOQ	OU
7100283355	xxx	3M™ Hybrid Structural Tape Activator, Clear, 1 Gallon	4	Canister
7100283265	xxx	3M™ Hybrid Structural Tape Activator, Clear, 1/2 Pint	12	Canister

3M™ Primer 9348

3M™ Scotch-Weld™ Primer 9348 is a primer that resists plasticizer migration.

- Transparent
- Lettering Surface Cleaning & Preparation
- Solvent based

Product ID	Part Number	Product Name	MOQ	OU
7100132671	9348.1N	3M™ Primer 9348, Transparent, 1 L	12	Canister

3M™ Scotch-Weld™ Acrylic Adhesive Accelerator A3-2

3M™ Scotch-Weld™ Acrylic Adhesive Accelerator A3-2 is the accelerator (Part A) of a two-part acrylic adhesive, engineered to be used with a B/A system. We designed this accelerator to use with our 3M™ Scotch-Weld™ Acrylic Adhesives DP8805NS, DP8810NS and DP8825NS. The fast rate of cure provides rapid strength build-up and produces tough, impact-resistant bonds.

- Accelerator designed to cure with select acrylic adhesives: DP8805NS, DP8810NS, DP8825NS
- Provides fast strength build-up when combined in a 10:1 B/A mix ratio
- Formulated to produce tough, impact-resistant bonds for durability



Product ID	Part Number	Product Name	MOQ	OU
7100102180	88A321	3M™ Scotch-Weld™ Acrylic Adhesive Accelerator A3-2, Green, Part A, 3.78 L	1	Canister
7100101506	DP88A325	3M™ Scotch-Weld™ Acrylic Adhesive Accelerator A3-2, Green, Part A, 18.9 L	1	Canister

3M™ Scotch-Weld™ Instant Adhesive Activator AC11

3M™ Scotch-Weld™ Instant Adhesive Activator AC11 is a solvent- based activator formulated to increase the cure speed of Scotch-Weld cyanoacrylate adhesives.

- Can also be used to ,fillet cure' and to cure adhesive outside of the joint
- Supplied in 200 ml aerosols
- Give instant ,on demand' curing



Product ID	Part Number	Product Name	MOQ	OU
7100027507	xxx	3M™ Scotch-Weld™ Instant Adhesive Activator AC11, 200 ml	1	Bottle

Adhesives, Sealants & Fillers

3M™ Scotch-Weld™ Metal Primer 3901

3M™ Scotch-Weld™ Metal Primer 3901 is a primer designed for applications using 3M™ Scotch-Weld™ Structural Adhesives. This film and liquid adhesive primer is able to improve metal and glass adhesion. Additional features of this primer include improved corrosion protection and resistance to environmental exposure for metal.



- Improves glass and metal adhesion and resistance to environmental exposure for epoxy and urethane structural adhesives
- Offers improved corrosion protection to metal for long-lasting performance
- Protects cleaned surfaces until bonding operations can be completed

Product ID	Part Number	Product Name	MOQ	OU
7000000907	xxx	3M™ Scotch-Weld™ Structural Adhesive Primer 3901, Red, 240 ml	12	Canister

3M™ VHB™ Silane Glass Primer

3M™ VHB™ Silane Glass Primer combats moisture resistance on glass from adhesives - READY FOR USE

- Combat moisture resistance on glass from adhesives
- Apply as a primer to bond to glass: Essential primer for bonding letters to glass shop fronts and for bonding glass in bathrooms or kitchens
- Recommended for use with 3M™ VHB™ tape

Product ID	Part Number	Product Name	MOQ	OU
7000006770	xxx	3M™ VHB™ Silane Glass Primer, Transparent, 1 L	6	Bottle

3M™ Tape Primer 94

3M™ Tape Primer 94 is an adhesion promoter for use in conjunction with 3M™ VHB™ Tape that supports adhesion to critical substrates such as PE, PP, ABS, PET/PBT blends, concrete, wood, glass, metal and painted metal surfaces.



- Adhesion promoter
- Useful on a wide variety of substrates
- Durable

Product ID	Part Number	Product Name	MOQ	OU
7000001579	xxx	3M™ Tape Primer 94, Yellow, 18.9 L	1	Bottle
7100269256	xxx	3M™ Tape Primer 94, Yellow, 236 ml	12	Canister
7000001584	xxx	3M™ Tape Primer 94, Yellow, 946 ml	12	Bottle
7100269257	xxx	3M™ Tape Primer 94, Yellow, 946 ml	1	Canister

Adhesives, Sealants & Fillers

3M™ VHB™ Tape Universal Primer UV

3M™ VHB™ Tape Universal Primer UV is a priming solution designed for bonding with 3M™ VHB™ Tapes. It enables strong, durable bonds on surfaces like polypropylene, ABS, PET/PBT blends and other difficult to stick to substrates while improving a manufacturer's environmental, health, and safety profile when compared to using 3M™ Primer 94.



- Promotes adhesion to polypropylene, ABS, PET/PBT blends, and other difficult to stick to substrates
- Improved environmental, health, and safety profile compared to 3M™ Primer 94
- UV indicator verifies primer application, reducing priming errors and increasing quality control

Product ID	Part Number	Product Name	MOQ	OU
7100116406	PR-UV/237	3M™ VHB™ Tape Universal Primer UV, Light yellow with fluorescent bluish tint, 236 ml	12	Canister
7100107033	PR-UV/946	3M™ VHB™ Tape Universal Primer UV, Light yellow with fluorescent bluish tint, 946 ml	12	Canister



Cleaning Supplies

Cleaning Supplies

General Purpose Cleaners

3M™ Industrial Cleaners and Adhesive Remover

3M™ Industrial Cleaners and Adhesive Removers are ideal for helping dissolve and remove dirt, grease, tar, and many non-curing type adhesives. They clean without streaking and have proven to be excellent for surface preparation in adhesive applications. While these multipurpose cleaners are suitable for industrial use, they are also safe enough for everyday projects.

- Removes grease, oil, ink and most adhesives without the need to soak
- Provides mold-release agents
- Removes adhesive without damaging the surface underneath



Product ID	Part Number	Product Name	MOQ	OU
7100180981	xxx	3M™ Industrial Cleaners and Adhesive Remover, Transparent, 5 L	4	Canister

3M™ Industrial Cleaner Citrus Base

3M™ Industrial Cleaner Citrus Base is ideal for helping dissolve and remove dirt, grease, tar, and many non-curing type adhesives. They are a citrus oil based cleaner and contain no petroleum distillates.

- Helps dissolve and remove dirt, grease, tar and much more for a wide variety of industrial uses
- Removal material included
- Removes glue without damaging the underlying surface



Product ID	Part Number	Product Name	MOQ	OU
7100178336	xxx	3M™ Industrial Cleaner Citrus Base, Transparent, 200 ml, Label1	12	Canister
7100179228	xxx	3M™ Industrial Cleaner Citrus Base, Transparent, 200 ml, Label2	12	Canister
7100178338	xxx	3M™ Industrial Cleaner Citrus Base, Transparent, 500 ml	12	Canister

3M™ VHB™ Surface Cleaner

3M™ VHB™ Surface Cleaner is a multi-surface cleaner, for use with 3M VHB Tape range to ensure a clean, grease free clean surface for the best bond.

- Degreasing of surfaces
- Preparation of surfaces for bonding
- Evaporates quickly leaving no residue



Product ID	Part Number	Product Name	MOQ	OU
7000071715	SCSACHET	3M™ VHB™ Surface Cleaner Sachets, 100 Towels	100	Each
7000071716	VHBCLEAN	3M™ VHB™ Surface Cleaner, 1 L	6	Bottle



Double Sided Tapes

3M™ VHB™ Tapes

Maintain consistency from sketch to construction, and eliminate distracting, visible fasteners like screws and bolts. These strong double-sided acrylic foam tapes let you quickly and easily create a long-lasting bond that actually increases in strength over time.

Find the tape you need based on the substrate or external condition you're working with.



For Plastics and Cold Temperatures

3M™ VHB™ Tapes LSE Family to bond composites, TPE, TPO, PP and low surface energy (LSE) plastics without primer.



For Paints, Powder Coatings & Irregular Surfaces

3M™ VHB™ Tapes 5952 Family to bond a variety of paint systems, powder coatings, medium surface energy plastics and irregular surfaces. A highly conformable tape.



For Transparent Materials

3M™ VHB™ Tape 4910 Family designed to create durable and reliable bonds on transparent materials or wherever a clear bond is needed.



For High Temperatures and In-Process Powder Coating

3M™ VHB™ Tape GPH Series is designed for high temperature applications (up to +230 °C) and for multi-material bonding.



For General Purpose and Automated Applications

No-fuss permanent bonding for everyday applications with 3M™ VHB™ Tape RP+ Family.



For Automated Applications

3M™ VHB™ Extrudable Tape GP is an extrudable high strength pressure-sensitive adhesive for automated bonding. It requires little or no surface preparation for some substrates and offers immediate handling strength.



Click or scan QR code

3M™ Thin Bonding Tapes

Thin bonding lets your design shine without bulky fasteners by using a virtually invisible industrial-strength bond to attach materials. Using a tape rather than a liquid adhesive allows you to customise the tape to the precise shape you need, as well as giving you production flexibility by leaving the liner in place until the second substrate is ready. Choose the double-sided tape or adhesive transfer tape you need based on your requirements.



For challenging environments - 3M™ Acrylic Adhesive 100MP

- Exceptional shear strength even at elevated temperatures and higher peel strength than many other adhesive families
- Very high temperature resistance
- High solvent resistance



For Metals and Easy-to Stick Surfaces 3M™ Acrylic Adhesive 200MP

- Outstanding adhesion to metal and high surface energy materials
- Anti-lifting properties and staying power on curved surfaces
- Solvent and weather resistance



For Plastics and Hard-to Stick Surfaces - 3M™ Acrylic Adhesive 300LSE

- High initial adhesion and shear strength even for low surface energy materials
- Outstanding performance on lightly oiled and powder coated surfaces
- Good chemical and moisture resistance



For Hard-to Bond Textures - 3M™ Acrylic Adhesive 300MP

- High initial adhesion and shear strength on textured or rough surfaces, such as foam and textiles
- Particularly soft and free-flowing pressure sensitive adhesive



General purpose solution - 3M™ GPT-020 / GPT-020F Double Coated Tape

- Ideal general purpose industrial thin bond tape for a wide range of applications
- Adhesion to a wide variety of substrates ranging from metals to some plastics



Automation Lite – Scotch® ATG System

- Paper and packaging bonding
- Proven tool for the quick application of adhesive transfer tapes
- Wide range of adhesive tapes to suit almost any application



Click or scan QR code

Double Sided Tapes

VHB Tapes

3M™ VHB™ Extrudable Tape GP

3M™ VHB™ Extrudable Tape GP is a high strength pressure-sensitive adhesive that provides immediate handling strength, fast and easy application, and delivers the durability that customers require. This new bonding solution, tailor-made for automation, reimagines tape, providing a faster, simplified, more sustainable solution for manufacturing processes. It provides excellent adhesion to many substrates – in some cases with little or no surface preparation – and has a stretch release feature that allows clean adhesive removal for rework or recycling of parts.



- Bond line can be laid in variable widths, thicknesses and profiles
- Bond line can be closed immediately (hot) or after weeks (cold)
- Stretch release technology allows easy removal for reworkability and reduced scrap

Product ID	Part Number	Product Name	MOQ	OU
7100268065	VHBEXTRUD	3M™ VHB™ Extrudable Tape GP, Black, 8.5 mm x 298 m	1	Each

3M™ VHB™ Tape LSE-060WF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape LSE-060WF offers a superior bonding performance without primer on difficult to bond substrates such as PP, TPO, TPE, and composite materials.



- White, 0.6 mm, modified acrylic adhesive with a conformable, acrylic foam core
- Bonds LSE plastics and composites without primer
- Superior outdoor performance, UV and solvent resistance

Product ID	Part Number	Product Name	MOQ	OU
7100143322	xxx	3M™ VHB™ Tape LSE-060WF, White, 12 mm x 33 m, 0.6 mm	18	Roll
7100154121	xxx	3M™ VHB™ Tape LSE-060WF, White, 19 mm x 3 m, 0.6 mm, 48/CV	48	Roll
7100143327	xxx	3M™ VHB™ Tape LSE-060WF, White, 19 mm x 33 m, 0.6 mm	14	Roll
7100143305	xxx	3M™ VHB™ Tape LSE-060WF, White, 25 mm x 33 m, 0.6 mm	7	Roll
7100247156	xxx	3M™ VHB™ Tape LSE-060WF, White, 1150 mm x 33 m, 0.6 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape LSE-110WF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape LSE-110WF offers a superior bonding performance without primer on difficult to bond substrates such as PP, TPO, TPE, and composite materials.

- White, 1.1 mm, modified acrylic adhesive with a conformable, acrylic foam core
- Bonds LSE plastics and composites without primer
- Superior outdoor performance, UV and solvent resistance



Product ID	Part Number	Product Name	MOQ	OU
7100143324	xxx	3M™ VHB™ Tape LSE-110WF, White, 12 mm x 33 m, 1.1 mm	18	Roll
7100154122	xxx	3M™ VHB™ Tape LSE-110WF, White, 19 mm x 3 m, 1.1 mm, 48/CV	96	Roll
7100288303	xxx	3M™ VHB™ Tape LSE-110WF, White, 19 mm x 11 m, 1.1 mm	4	Roll
7100143325	xxx	3M™ VHB™ Tape LSE-110WF, White, 19 mm x 33 m, 1.1 mm	14	Roll
7100143321	xxx	3M™ VHB™ Tape LSE-110WF, White, 25 mm x 33 m, 1.1 mm	7	Roll
7100247155	xxx	3M™ VHB™ Tape LSE-110WF, White, 1150 mm x 33 m, 1.1 mm	1	Roll

3M™ VHB™ Tape LSE-160WF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape LSE-160WF offers a superior bonding performance without primer on difficult to bond substrates such as PP, TPO, TPE, and composite materials.

- White, 1.6 mm, modified acrylic adhesive with a conformable, acrylic foam core
- Bonds LSE plastics and composites without primer
- Superior outdoor performance, UV and solvent resistance



Product ID	Part Number	Product Name	MOQ	OU
7100143306	xxx	3M™ VHB™ Tape LSE-160WF, White, 12 mm x 33 m, 1.6 mm	18	Roll
7100154123	xxx	3M™ VHB™ Tape LSE-160WF, White, 19 mm x 3 m, 1.6 mm, 48/CV	96	Roll
7100143328	xxx	3M™ VHB™ Tape LSE-160WF, White, 19 mm x 33 m, 1.6 mm	14	Roll
7100143323	xxx	3M™ VHB™ Tape LSE-160WF, White, 25 mm x 33 m, 1.6 mm	7	Roll
7100247154	xxx	3M™ VHB™ Tape LSE-160WF, White, 1120 mm x 33 m, 1.6 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tapes GPH-060GF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape GPH-060GF is designed for bonding where high temperature tolerance is needed, including applications that undergo a powder coat or liquid painting process.

- Grey, 0.6 mm, acrylic adhesive with a conformable, acrylic foam core
- Excellent temperature resistance when bonding metal parts prior to heat cured paint processing
- Strong and durable bonds to a broad range of high-and medium surface-energy substrates like metal, aluminium, ABS, etc.



Product ID	Part Number	Product Name	MOQ	OU
7100100753	xxx	3M™ VHB™ Tape GPH-060GF, Grey, 12 mm x 33 m, 0.6 mm	18	Roll
7100101623	xxx	3M™ VHB™ Tape GPH-060GF, Grey, 19 mm x 3 m, 0.6 mm	48	Roll
7100100752	xxx	3M™ VHB™ Tape GPH-060GF, Grey, 19 mm x 33 m, 0.6 mm	14	Roll
7100101042	xxx	3M™ VHB™ Tape GPH-060GF, Grey, 25 mm x 33 m, 0.6 mm	7	Roll
7100297127	GPH060115033	3M™ VHB™ Tape GPH-060GF, Grey, 1150 mm x 33 m, 0.6 mm	1	Roll
7100297129	GPH060115066	3M™ VHB™ Tape GPH-060GF, Grey, 1150 mm x 66 m, 0.6 mm	1	Roll

3M™ VHB™ Tapes GPH-110GF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ GPH Tapes GPH-110GF is designed for bonding where high temperature tolerance is needed, including applications that undergo a powder coat or liquid painting process.

- Grey, 1.1 mm, acrylic adhesive with a conformable, acrylic foam core
- Excellent temperature resistance when bonding metal parts prior to heat cured paint processing
- Strong and durable bonds to a broad range of high-and medium surface-energy substrates like metal, aluminium, ABS, etc.



Product ID	Part Number	Product Name	MOQ	OU
7100101624	xxx	3M™ VHB™ Tape GPH-110GF Grey, 19 mm x 3 m, 1.1 mm	48	Roll
7100099836	xxx	3M™ VHB™ Tape GPH-110GF, Grey, 12 mm x 33 m, 1.1 mm	18	Roll
7100227350	GPH1101911	3M™ VHB™ Tape GPH-110GF, Grey, 19 mm x 11 m, 1.1 mm	4	Roll
7100099833	xxx	3M™ VHB™ Tape GPH-110GF, Grey, 19 mm x 33 m, 1.1 mm	18	Roll
7100099834	xxx	3M™ VHB™ Tape GPH-110GF, Grey, 25 mm x 33 m, 1.1 mm	7	Roll
7100297050	GPH1101150	3M™ VHB™ Tape GPH-110GF, Grey, 1150 mm x 33 m, 1.1 mm	1	Roll
7100297128	GPH110115066	3M™ VHB™ Tape GPH-110GF, Grey, 1150 mm x 66 m, 1.1 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tapes GPH-160GF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape GPH-160GF is designed for bonding where high temperature tolerance is needed, including applications that undergo a powder coat or liquid painting process.

- Grey, 1.6 mm, acrylic adhesive with a conformable, acrylic foam core
- Excellent temperature resistance when bonding metal parts prior to heat cured paint processing
- Strong and durable bonds to a broad range of high-and medium surface-energy substrates like metal, aluminium, ABS, etc.



Product ID	Part Number	Product Name	MOQ	OU
7100101043	xxx	3M™ VHB™ Tape GPH-160GF, Grey, 12 mm x 33 m, 1.6 mm	18	Roll
7100100757	xxx	3M™ VHB™ Tape GPH-160GF, Grey, 19 mm x 33 m, 1.6 mm	14	Roll
7100101045	xxx	3M™ VHB™ Tape GPH-160GF, Grey, 25 mm x 33 m, 1.6 mm	7	Roll
7100297479	GPH160112033	3M™ VHB™ Tape GPH-160GF, Grey, 1120 mm x 33 m, 1.6 mm	1	Roll

3M™ VHB™ Tape 4926

Dream, Design, Deliver with our 3M™ VHB™ Tape 4926. It is a grey, 0.4 mm thick, multi-purpose acrylic adhesive with a conformable, foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of high and medium surface energy substrates..

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth



Product ID	Part Number	Product Name	MOQ	OU
7000029043	xxx	3M™ VHB™ Tape 4926P, Grey, 610 mm x 33 m, 0.38 mm	1	Roll

3M™ VHB™ Tape 4936P

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4936 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Grey, 0.6 mm, acrylic adhesive with a conformable, acrylic foam core
- Offers a good platisiser resistance
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like aluminium, stainless steel, galvanised steel, polycarbonate, ABS



Product ID	Part Number	Product Name	MOQ	OU
7000072382	xxx	3M™ VHB™ Tape 4936P, Grey, 6 mm x 33 m, 0.6 mm	12	Roll
7000072383	xxx	3M™ VHB™ Tape 4936P, Grey, 9 mm x 33 m, 0.6 mm	8	Roll
7000072384	xxx	3M™ VHB™ Tape 4936P, Grey, 12 mm x 33 m, 0.6 mm	6	Roll
7000072385	xxx	3M™ VHB™ Tape 4936P, Grey, 15 mm x 33 m, 0.6 mm	5	Roll
7000072386	xxx	3M™ VHB™ Tape 4936P, Grey, 19 mm x 33 m, 0.6 mm	4	Roll
7000072387	xxx	3M™ VHB™ Tape 4936P, Grey, 25 mm x 33 m, 0.6 mm	3	Roll
7000072379	xxx	3M™ VHB™ Tape 4936P, Grey, 300 mm x 33 m, 0.6 mm	1	Roll
7000072381	xxx	3M™ VHB™ Tape 4936P, Grey, 1220 mm x 33 m, 0.6 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 4936F

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4936 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Grey, 0.6 mm, acrylic adhesive with a conformable, acrylic foam core
- Offers a good plastisiser resistance
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like aluminium, stainless steel, galvanised steel, polycarbonate, ABS



Product ID	Part Number	Product Name	MOQ	OU
7000033131	xxx	3M™ VHB™ Tape 4936F, Grey, 12 mm x 33 m, 0.6 mm	6	Roll
7000072389	xxx	3M™ VHB™ Tape 4936F, Grey, 19 mm x 33 m, 0.6 mm	64	Roll
7000072390	xxx	3M™ VHB™ Tape 4936F, Grey, 25 mm x 33 m, 0.6 mm	48	Roll
7000033130	xxx	3M™ VHB™ Tape 4936F, Grey, 1200 mm x 33 m, 0.6 mm	1	Roll

3M™ VHB™ Tape 4941

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4941 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Grey, 1.1 mm, acrylic adhesive with a conformable, acrylic foam core
- Offers a good plastisiser resistance
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like aluminium, stainless steel, galvanised steel, polycarbonate, ABS



Product ID	Part Number	Product Name	MOQ	OU
7000043129	xxx	3M™ VHB™ Tape 4941, Grey, 6 mm x 33 m, 1.1 mm	12	Roll
7000072407	xxx	3M™ VHB™ Tape 4941P, Grey, 9 mm x 33 m, 1.1 mm	8	Roll
7000072409	xxx	3M™ VHB™ Tape 4941P, Grey, 15 mm x 33 m, 1.1 mm	5	Roll
7000072411	xxx	3M™ VHB™ Tape 4941P, Grey, 25 mm x 33 m, 1.1 mm	3	Roll
7000072413	xxx	3M™ VHB™ Tape 4941P, Grey, 38 mm x 33 m, 1.1 mm	2	Roll
7000072414	xxx	3M™ VHB™ Tape 4941P, Grey, 50 mm x 33 m, 1.1 mm	1	Roll
7000072399	xxx	3M™ VHB™ Tape 4941P, Grey, 300 mm x 33 m, 1.1 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 4941F

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4991 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Grey, 2.3 mm, acrylic adhesive with a conformable, acrylic foam core
- Offers a good plastisiser resistance
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like aluminium, stainless steel, galvanised steel, polycarbonate, ABS



Product ID	Part Number	Product Name	MOQ	OU
7000072398	xxx	3M™ VHB™ Tape 4941F, 100 m x 5 m	12	Roll
7000072415	xxx	3M™ VHB™ Tape 4941F, Grey, 12 mm x 33 m, 1.1 mm	6	Roll
7000072400	xxx	3M™ VHB™ Tape 4941F, Grey, 15 mm x 5 m, 1.1 mm	60	Roll
7000072416	xxx	3M™ VHB™ Tape 4941F, Grey, 19 mm x 33 m, 1.1 mm	4	Roll
7000072417	xxx	3M™ VHB™ Tape 4941F, Grey, 25 mm x 33 m, 1.1 mm	48	Roll
7000033132	xxx	3M™ VHB™ Tape 4941F, Grey, 1200 mm x 33 m, 1.1 mm	1	Roll

3M™ VHB™ Tape 4956

Dream, Design, Deliver with 3M™ VHB™ Tape 4956. It is a gray, 0.062 in (1.6 mm), multi-purpose acrylic adhesive with a conformable, foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Virtually invisible fastening keeps surfaces smooth
- Can replace mechanical fasteners (rivets, welds, screws) or liquid adhesives



Product ID	Part Number	Product Name	MOQ	OU
7000072511	xxx	3M™ VHB™ Tape 4956F, Grey, 19 mm x 33 m, 1.5 mm	4	Roll
7000072512	xxx	3M™ VHB™ Tape 4956F, Grey, 25 mm x 33 m, 1.5 mm	3	Roll
7000072501	xxx	3M™ VHB™ Tape 4956P, Grey, 9 mm x 33 m, 1.5 mm	8	Roll
7000072502	xxx	3M™ VHB™ Tape 4956P, Grey, 12 mm x 33 m, 1.5 mm	6	Roll
7000072504	xxx	3M™ VHB™ Tape 4956P, Grey, 19 mm x 33 m, 1.6 mm	4	Roll
7000072505	xxx	3M™ VHB™ Tape 4956P, Grey, 25 mm x 33 m, 1.5 mm	3	Roll
7000072500	xxx	3M™ VHB™ Tape 4956P, Grey, 295 mm x 33 m, 1.5 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 4991

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4991 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Grey, 2.3 mm, acrylic adhesive with a conformable, acrylic foam core
- Offers a good plastisiser resistance
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like aluminium, stainless steel, galvanised steel, polycarbonate, ABS



Product ID	Part Number	Product Name	MOQ	OU
7000072529	xxx	3M™ VHB™ Tape 4991, Grey, 6 mm x 16.5 m, 2.3 mm	96	Roll
7100019029	xxx	3M™ VHB™ Tape 4991, Grey, 15 mm x 16.5 m, 2.3 mm	80	Roll
7000072530	xxx	3M™ VHB™ Tape 4991F, Grey, 9 mm x 16.5 m, 2.3 mm	8	Roll
7000033141	xxx	3M™ VHB™ Tape 4991F, Grey, 12 mm x 16.5 m, 2.3 mm	6	Roll
7100123358	xxx	3M™ VHB™ Tape 4991F, Grey, 19 mm x 5.5 m, 2.5 mm, Blister	4	Roll
7000033143	xxx	3M™ VHB™ Tape 4991F, Grey, 19 mm x 16.5 m, 2.3 mm	4	Roll
7000072533	xxx	3M™ VHB™ Tape 4991F, Grey, 25 mm x 16.5 m, 2.3 mm	3	Roll
7000033144	xxx	3M™ VHB™ Tape 4991F, Grey, 1200 mm x 16.5 m, 2.3 mm	1	Roll

3M™ VHB™ Tape 4947

Dream, Design, Deliver with our 3M™ VHB™ Tape 4947. It is black, 1.1 mm thick, multi-purpose acrylic adhesive with a conformable, foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of high and medium surface energy substrates.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth



Product ID	Part Number	Product Name	MOQ	OU
7000072462	xxx	3M™ VHB™ Tape 4947F, Black, 6 mm x 33 m, 1.1 mm	12	Roll
7000072463	xxx	3M™ VHB™ Tape 4947F, Black, 9 mm x 33 m, 1.1 mm	8	Roll
7000072464	xxx	3M™ VHB™ Tape 4947F, Black, 12 mm x 33 m, 1.1 mm	6	Roll
7000072465	xxx	3M™ VHB™ Tape 4947F, Black, 19 mm x 33 m, 1.1 mm	4	Roll
7000072458	xxx	3M™ VHB™ Tape 4947F, Black, 22 mm x 33 m, 1.1 mm	3	Roll
7000072466	xxx	3M™ VHB™ Tape 4947F, Black, 25 mm x 33 m, 1.1 mm	3	Roll
7000072467	xxx	3M™ VHB™ Tape 4947F, Black, 38 mm x 33 m, 1.1 mm	2	Roll
7000006778	xxx	3M™ VHB™ Tape 4947F, Black, 295 mm x 33 m, 1.1 mm	4	Roll

Double Sided Tapes

3M™ VHB™ Tape 5906

3M™ VHB™ Tape 5906F Dream, Design, Deliver It is a black, 0.15 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints. It's ideal fo low profile bonding.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

Product ID	Part Number	Product Name	MOQ	OU
7100193935	5906F/1168	3M™ VHB™ Tape 5906F, Black, 1168 mm x 66 m, 0.3 mm	1	Roll

3M™ VHB™ Tape 5907

3M™ VHB™ Tape 5907F, Black Dream, Design, Deliver . It is a black, 0.2 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints. It's ideal fo low profile bonding.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

Product ID	Part Number	Product Name	MOQ	OU
7100193900	59071168	3M™ VHB™ Tape 5907F, Black, 1168 mm x 66 m, 0.3 mm	1	Roll

3M™ VHB™ Tape 5908

3M™ VHB™ Tape 5908F Dream, Design, Deliver . It is a black, 0.25 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints. It's ideal fo low profile bonding.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

Product ID	Part Number	Product Name	MOQ	OU
7100195214	5908F/1168	3M™ VHB™ Tape 5908F, Black, 1168 mm x 66 m, 0.3 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 5909

3M™ VHB™ Tape 5909F Dream, Design, Deliver . It is a black, 0.3 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints. It's ideal for low profile bonding.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

Product ID	Part Number	Product Name	MOQ	OU
7100193936	5909F/1168	3M™ VHB™ Tape 5909F, Black, 1168 mm x 66 m, 0.3 mm	1	Roll

3M™ VHB™ Tape 5915

Dream, Design, Deliver with our 3M™ VHB™ Tape 5915. It is a black, 0.4 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

Product ID	Part Number	Product Name	MOQ	OU
7000049448	xxx	3M™ VHB™ Tape 5915, Black, 1168 mm x 33 m, 0.4 mm	1	Roll
7000062015	xxx	3M™ VHB™ Tape 5915P, Black, 1168 mm x 66 m, 0.6 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 5925F

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 5925F provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Black, 0.6 mm, modified acrylic adhesive and very conformable acrylic foam core
- Excellent adhesion to the widest variety of surfaces, including most powder coated paints, metals, glass, sealed wood, acrylic, polycarbonate, ABS
- Superior outdoor performance, UV and solvent resistance



Product ID	Part Number	Product Name	MOQ	OU
7100211824	5925F6	3M™ VHB™ Tape 5925F, Black, 6 mm x 66 m, 0.6 mm	12	Roll
7100211817	xxx	3M™ VHB™ Tape 5925F, Black, 9 mm x 33 m, 0.6 mm	8	Roll
7100211818	xxx	3M™ VHB™ Tape 5925F, Black, 10 mm x 33 m, 0.6 mm	232	Roll
7100211819	xxx	3M™ VHB™ Tape 5925F, Black, 12 mm x 33 m, 0.6 mm	5	Roll
7100211800	xxx	3M™ VHB™ Tape 5925F, Black, 12 mm x 56 m, 0.6 mm	450	Roll
7100211823	xxx	3M™ VHB™ Tape 5925F, Black, 12 mm x 600 m, 0.6 mm	9	Roll
7100211820	xxx	3M™ VHB™ Tape 5925F, Black, 16 mm x 33 m, 0.6 mm	90	Roll
7100211821	xxx	3M™ VHB™ Tape 5925F, Black, 19 mm x 33 m, 0.6 mm	4	Roll
7100211822	xxx	3M™ VHB™ Tape 5925F, Black, 25 mm x 33 m, 0.6 mm	3	Roll
7100211825	5925F10066N	3M™ VHB™ Tape 5925F, Black, 100 mm x 66 m, 0.6 mm	12	Roll
7100211816	xxx	3M™ VHB™ Tape 5925F, Black, 295 mm x 33 m, 0.6 mm	1	Roll
7100211815	59251160	3M™ VHB™ Tape 5925F, Black, 1190 mm x 33 m, 0.6 mm	1	Roll

3M™ VHB™ Tape 5930

Dream, Design, Deliver with our 3M™ VHB™ Tape 5930. It is a black, 0.8 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth



Product ID	Part Number	Product Name	MOQ	OU
7000049447	xxx	3M™ VHB™ Tape 5930P, Black, 1168 mm x 33 m, 0.8 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 5952F

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 5952 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Black, 1.1 mm, modified acrylic adhesive and very conformable acrylic foam core
- Excellent adhesion to the widest variety of surfaces, including most powder coated paints, metals, glass, sealed wood, acrylic, polycarbonate, ABS
- Superior outdoor performance, UV and solvent resistance



Product ID	Part Number	Product Name	MOQ	OU
7100211828	5952F/633	3M™ VHB™ Tape 5952F, Black, 6 mm x 33 m, 1.1 mm	10	Roll
7100211829	xxx	3M™ VHB™ Tape 5952F, Black, 8 mm x 33 m, 1.1 mm	900	Roll
7100211830	5952F9	3M™ VHB™ Tape 5952F, Black, 9 mm x 33 m, 1.1 mm	8	Roll
7100211831	5952F12	3M™ VHB™ Tape 5952F, Black, 12 mm x 33 m, 1.1 mm	6	Roll
7100211832	xxx	3M™ VHB™ Tape 5952F, Black, 15 mm x 33 m, 1.1 mm	16	Roll
7100211813	xxx	3M™ VHB™ Tape 5952F, Black, 19 mm x 3 m, 1.1 mm	48	Roll
7100223843	xxx	3M™ VHB™ Tape 5952F, Black, 19 mm x 11 m, 1.1 mm	4	Roll
7100211833	5952F19	3M™ VHB™ Tape 5952F, Black, 19 mm x 33 m, 1.1 mm	4	Roll
7100211834	xxx	3M™ VHB™ Tape 5952F, Black, 25 mm x 33 m, 1.1 mm	3	Roll
7100211827	5952F/30033	3M™ VHB™ Tape 5952F, Black, 305 mm x 33 m, 1.1 mm	1	Roll
7100211826	xxx	3M™ VHB™ Tape 5952F, Black, 1220 mm x 33 m, 1.1 mm	1	Roll

3M™ VHB™ Tape 5952P

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 5952 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Black, 1.1 mm, modified acrylic adhesive and very conformable acrylic foam core
- Excellent adhesion to the widest variety of surfaces, including most powder coated paints, metals, glass, sealed wood, acrylic, polycarbonate, ABS
- Superior outdoor performance, UV and solvent resistance



Product ID	Part Number	Product Name	MOQ	OU
7010012127	xxx	3M™ VHB™ Tape 5952P, Black, 1220 mm x 33 m, 1.1 mm, Paper Liner	1	Roll

Double Sided Tapes

3M™ VHB™ Flame Retardant Tape 5958FR

Dream, Design, Deliver with our 3M™ VHB™ Flame Retardant Tape 5958FR. It is a black, 1 mm thick, modified acrylic adhesive with a very conformable, foam core. The fast and easy to use permanent bonding method provides high strength, long-term durability and is flame retardant. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including many powder coated paints.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability and is flame retardant
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

Product ID	Part Number	Product Name	MOQ	OU
7100094823	xxx	3M™ VHB™ Flame Retardant Tape 5958RF, Black, 10 mm x 33 m, 1.0 mm	18	Roll
7000049210	xxx	3M™ VHB™ Flame Retardant Tape 5958RF, Black, 25 mm x 33 m, 1.0 mm	9	Roll
7000049257	xxx	3M™ VHB™ Flame Retardant Tape 5958RF, Black, 1194 mm x 33 m, 1.0 mm	1	Roll

3M™ VHB™ Tape 5962F

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 5962 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.



- Black, 1.5 mm, modified acrylic adhesive and very conformable acrylic foam core
- Excellent adhesion to the widest variety of surfaces, including most powder coated paints, metals, glass, sealed wood, acrylic, polycarbonate, ABS
- Superior outdoor performance, UV and solvent resistance

Product ID	Part Number	Product Name	MOQ	OU
7100211840	xxx	3M™ VHB™ Tape 5962F, Black 25 mm x 33 m, 1.6 mm	3	Roll
7100211837	xxx	3M™ VHB™ Tape 5962F, Black, 9 mm x 33 m, 1.6 mm	66	Roll
7100211838	5962F12	3M™ VHB™ Tape 5962F, Black, 12 mm x 33 m, 1.6 mm	6	Roll
7100223836	5962F191	3M™ VHB™ Tape 5962F, Black, 19 mm x 8 m, 1.6 mm, Blister	4	Roll
7100211839	xxx	3M™ VHB™ Tape 5962F, Black, 19 mm x 33 m, 1.6 mm	4	Roll
7100211836	5962F/30533	3M™ VHB™ Tape 5962F, Black, 305 mm x 33 m, 1.6 mm	4	Roll
7100211835	xxx	3M™ VHB™ Tape 5962F, Black, 1220 mm x 33 m, 1.6 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 4905

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4905 is designed for bonding transparent materials or wherever a clear bond is needed.

- Transperent, 0.5 mm, general purpose acrylic adhesive and firm acrylic foam core
- Clear construction allowing joining of transparent material and virtually invisible bondline
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like paints, metals and glass, acryl glass (PMMA), polycarbonate



Product ID	Part Number	Product Name	MOQ	OU
7000072259	xxx	3M™ VHB™ Tape 4905F, Transparent, 6 mm x 33 m, 0.5 mm	96	Roll
7000033113	4905F666	3M™ VHB™ Tape 4905F, Transparent, 6 mm x 66 m, 0.5 mm	12	Roll
7000072260	4905F933	3M™ VHB™ Tape 4905F, Transparent, 9 mm x 33 m, 0.5 mm	8	Roll
7000072264	xxx	3M™ VHB™ Tape 4905F, Transparent, 9 mm x 66 m, 0.5 mm	8	Roll
7000072261	xxx	3M™ VHB™ Tape 4905F, Transparent, 12 mm x 33 m, 0.5 mm	102	Roll
7000072265	xxx	3M™ VHB™ Tape 4905F, Transparent, 12 mm x 66 m, 0.5 mm	6	Roll
7000072262	4905F193	3M™ VHB™ Tape 4905F, Transparent, 19 mm x 33 m, 0.5 mm	4	Roll
7000072266	xxx	3M™ VHB™ Tape 4905F, Transparent, 19 mm x 66 m, 0.5 mm	4	Roll
7000072263	xxx	3M™ VHB™ Tape 4905F, Transparent, 25 mm x 33 m, 0.5 mm	48	Roll
7000072267	xxx	3M™ VHB™ Tape 4905F, Transparent, 25 mm x 66 m, 0.5 mm	3	Roll
7000072248	xxx	3M™ VHB™ Tape 4905F, Transparent, 285 mm x 66 m, 0.5 mm	1	Roll
7000033111	xxx	3M™ VHB™ Tape 4905F, Transparent, 1140 mm x 66 m, 0.5 mm	1	Roll
7000037354	xxx	3M™ VHB™ Tape 4905P, Transparent 1140 mm x 33 m, 0.5 mm	1	Roll
7000033112	xxx	3M™ VHB™ Tape 4905P, Transparent, 6 mm x 33 m, 0.5 mm	96	Roll
7000072250	xxx	3M™ VHB™ Tape 4905P, Transparent, 9 mm x 66 m, 0.5 mm	8	Roll
7000072255	xxx	3M™ VHB™ Tape 4905P, Transparent, 12 mm x 33 m, 0.5 mm	6	Roll
7000072251	xxx	3M™ VHB™ Tape 4905P, Transparent, 12 mm x 66 m, 0.5 mm	102	Roll
7000072252	xxx	3M™ VHB™ Tape 4905P, Transparent, 15 mm x 66 m, 0.5 mm	5	Roll
7000072257	xxx	3M™ VHB™ Tape 4905P, Transparent, 19 mm x 33 m, 0.5 mm	4	Roll
7000072253	xxx	3M™ VHB™ Tape 4905P, Transparent, 19 mm x 66 m, 0.5 mm	4	Roll
7000072254	xxx	3M™ VHB™ Tape 4905P, Transparent, 25 mm x 66 m, 0.5 mm	48	Roll
7000072270	xxx	3M™ VHB™ Tape 4905P, Transparent, 285 mm x 33 m, 0.5 mm	1	Roll
7000072243	xxx	3M™ VHB™ Tape 4905P, Transparent, 285 mm x 66 m, 0.5 mm	4	Roll
7000072247	xxx	3M™ VHB™ Tape 4905P, Transparent, 1220 mm x 6 m, 0.5 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 4910

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4910 is designed for bonding transparent materials or wherever a clear bond is needed.

- Transparent, 1.0 mm, general purpose acrylic adhesive and firm acrylic foam core
- Clear construction allowing joining of transparent material and virtually invisible bondline
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like paints, metals and glass, acryl glass (PMMA), polycarbonate



Product ID	Part Number	Product Name	MOQ	OU
7000033115	xxx	3M™ VHB™ Tape 4910F, Transparent, 6 mm x 33 m, 1.0 mm	12	Roll
7000072289	xxx	3M™ VHB™ Tape 4910F, Transparent, 9 mm x 33 m, 1.0 mm	8	Roll
7000033116	xxx	3M™ VHB™ Tape 4910F, Transparent, 12 mm x 33 m, 1.0 mm	6	Roll
7000072290	xxx	3M™ VHB™ Tape 4910F, Transparent, 15 mm x 33 m, 1.0 mm	5	Roll
7000072294	xxx	3M™ VHB™ Tape 4910F, Transparent, 19 mm x 3 m, 1.0 mm	48	Roll
7100123355	xxx	3M™ VHB™ Tape 4910F, Transparent, 19 mm x 11 m, 1.0 mm, Blister	4	Roll
7000033117	xxx	3M™ VHB™ Tape 4910F, Transparent, 19 mm x 33 m, 1.0 mm	4	Roll
7100032063	xxx	3M™ VHB™ Tape 4910F, Transparent, 25 mm x 33 m, 1.0 mm	3	Roll
7000072292	xxx	3M™ VHB™ Tape 4910F, Transparent, 38 mm x 33 m, 1.0 mm	30	Roll
7000072293	xxx	3M™ VHB™ Tape 4910F, Transparent, 50 mm x 33 m, 1.0 mm	24	Roll
7000072276	xxx	3M™ VHB™ Tape 4910F, Transparent, 300 mm x 33 m, 1.0 mm	4	Roll
7000072281	xxx	3M™ VHB™ Tape 4910F, Transparent, 1120 mm x 33 m, 1.0 mm	1	Roll
7100071754	xxx	3M™ VHB™ Tape 4910F, Transparent, 1210 mm x 33 m, 1.0 mm	1	Roll
7000072285	xxx	3M™ VHB™ Tape 4910P, Transparent, 19 mm x 33 m, 1.0 mm	4	Roll
7000033118	xxx	3M™ VHB™ Tape 4910P, Transparent, 305 mm x 33 m, 1.0 mm	1	Roll
7000033128	xxx	3M™ VHB™ Tape 4910P, Transparent, 1120 mm x 33 m, 1.0 mm	1	Roll

3M™ VHB™ Tape 4915

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4915 is designed for bonding transparent materials or wherever a clear bond is needed.

- Transparent, 1.5 mm, general purpose acrylic adhesive and firm acrylic foam core
- Clear construction allowing joining of transparent material and virtually invisible bondline
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like paints, metals and glass, acryl glass (PMMA), polycarbonate



Product ID	Part Number	Product Name	MOQ	OU
7000033123	xxx	3M™ VHB™ Tape 4915F, Transparent, 6 mm x 25 m, 1.5 mm	12	Roll
7000043127	xxx	3M™ VHB™ Tape 4915F, Transparent, 12 mm x 25 m, 1.5 mm	6	Roll
7000072311	xxx	3M™ VHB™ Tape 4915F, Transparent, 19 mm x 25 m, 1.5 mm	4	Roll
7000072309	xxx	3M™ VHB™ Tape 4915F, Transparent, 285 mm x 25 m, 1.5 mm	1	Roll
7000072313	xxx	3M™ VHB™ Tape 4915F, Transparent, 1140 mm x 25 m, 1.5 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 4918

3M™ VHB™ Tape 4918 is a clear, 2.0mm thick, acrylic VHB tape. It is colourless making it ideal for bonding transparent materials or for applications where a colored bond line is unacceptable.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth, even edges are invisible due to it's transparency



Product ID	Part Number	Product Name	MOQ	OU
7000033126	xxx	3M™ VHB™ Tape 4918F, Transparent, 6 mm x 16.5 m, 2.0 mm	12	Roll
7000072319	xxx	3M™ VHB™ Tape 4918F, Transparent, 9 mm x 16.5 m, 2.0 mm	8	Roll
7000043128	xxx	3M™ VHB™ Tape 4918F, Transparent, 12.0 mm x 16.5 m, 2.0 mm	6	Roll
7000072320	xxx	3M™ VHB™ Tape 4918F, Transparent, 15 mm x 16.5 m, 2.0 mm	5	Roll
7000033127	xxx	3M™ VHB™ Tape 4918F, Transparent, 19 mm x 16.5 m, 2.0 mm	4	Roll
7000072321	xxx	3M™ VHB™ Tape 4918F, Transparent, 25 mm x 16.5 m, 2.0 mm	3	Roll
7000072317	xxx	3M™ VHB™ Tape 4918F, Transparent, 285 mm x 16.5 m, 2.0 mm	1	Roll
7000072322	xxx	3M™ VHB™ Tape 4918F, Transparent, 1140 mm x 16.5 m, 2.0 mm	1	Roll

3M™ VHB™ Tape RP+040GF

Dream, Design, Deliver with 3M™ VHB™ Tape RP+040GF. This grey 0.4 mm (16 mil) tape features a multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy-to-use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces, with temperature resistance of 230°C for up to 4 hours.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Virtually invisible fastening keeps surfaces smooth
- Can replace mechanical fasteners (rivets, welding, screws) or liquid adhesives in general purpose applications



Product ID	Part Number	Product Name	MOQ	OU
7100309730	RP+40GF19SAM	3M™ VHB™ Tape RP+040GF, 19 mm x 3 m	58	Roll
7100285875	RP+40GF	3M™ VHB™ Tape RP+040GF, Grey, 1120 mm x 66 m, 0.4 mm, Film Liner	1	Roll

Double Sided Tapes

3M™ VHB™ Tape RP+080GF

Dream, Design, Deliver with 3M™ VHB™ Tape RP+080GF. This grey 0.8 mm (32 mil) tape features a multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy-to-use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces, with temperature resistance of 230°C for up to 4 hours.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Virtually invisible fastening keeps surfaces smooth
- Can replace mechanical fasteners (rivets, welding, screws) or liquid adhesives in general purpose applications

Product ID	Part Number	Product Name	MOQ	OU
7100309731	RP+80GF19SAM	3M™ VHB™ Tape RP+080GF, 19 mm x 3 m	58	Roll
7100285874	RP+80GF1120	3M™ VHB™ Tape RP+080GF, Grey, 1120 mm x 66 m, 0.8 mm, Film Liner	1	Roll

3M™ VHB™ Tape RP+230GF

Dream, Design, Deliver with 3M™ VHB™ Tape RP+230GF. This grey 2.3 mm (90 mil) tape features a multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy-to-use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces, with temperature resistance of 230°C for up to 4 hours.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Virtually invisible fastening keeps surfaces smooth
- Can replace mechanical fasteners (rivets, welding, screws) or liquid adhesives in general purpose applications

Product ID	Part Number	Product Name	MOQ	OU
7100309729	xxx	3M™ VHB™ Tape RP+230GF, 19 mm x 3 m	58	Roll
7100285876	xxx	3M™ VHB™ Tape RP+230GF, Grey, 1120 mm x 33 m, 2.3 mm, Film Liner	1	Roll

3M™ VHB™ Tape RP+040GP

Dream, design, deliver with our 3M™ VHB™ Tape RP+040GP. It is a grey, 0.4 mm (16 mil), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its viscoelasticity and can bond to a variety of surfaces.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Grey, 0.4 mm (16 mil), multi-purpose adhesive and conformable acrylic foam core for good performance in a variety of applications
- Virtually invisible fastening keeps surfaces smooth

Product ID	Part Number	Product Name	MOQ	OU
7100309728	xxx	3M™ VHB™ Tape RP+040GP, 19 mm x 3 m	58	Roll
7100307059	xxx	3M™ VHB™ Tape RP+040GP, 1120 mm x 66 m	1	Roll

Double Sided Tapes

3M™ VHB™ Tape RP+060GP

Dream, design, deliver with our 3M™ VHB™ Tape RP+060GP. It is a grey, 25 mil (0.6 mm), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its visco-elasticity and can bond to a variety of surfaces.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Grey, 0.6 mm (25 mil), multi-purpose adhesive and conformable acrylic foam core for good performance in a variety of applications
- Virtually invisible fastening keeps surfaces smooth

Product ID	Part Number	Product Name	MOQ	OU
7100309727	xxx	3M™ VHB™ Tape RP+060GP, 19 mm x 3 m	58	Roll
7100307057	xxx	3M™ VHB™ Tape RP+060GP, 1120 mm x 66 m	1	Roll

3M™ VHB™ Tape RP+080GP

Dream, design, deliver with our 3M™ VHB™ Tape RP+080GP. It is a grey, 0.8 mm (32 mil), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its visco-elasticity and can bond to a variety of surfaces.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability.
- Grey, 0.8 mm (32 mil), multi-purpose adhesive and conformable acrylic foam core for good performance in a variety of applications.
- Virtually invisible fastening keeps surfaces smooth.

Product ID	Part Number	Product Name	MOQ	OU
7100309969	xxx	3M™ VHB™ Tape RP+080GP, 19 mm x 3 m	58	Roll
7100307226	xxx	3M™ VHB™ Tape RP+080GP, 1120 mm x 66 m	1	Roll

3M™ VHB™ Tape RP+110GP

Dream, design, deliver with our 3M™ VHB™ Tape RP+110GP. It is a grey, 1.1 mm (45 mil), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its viscoelasticity and can bond to a variety of surfaces.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability.
- Grey, 1.1 mm (45 mil), multi-purpose adhesive and conformable acrylic foam core for good performance in a variety of applications.
- Virtually invisible fastening keeps surfaces smooth.

Product ID	Part Number	Product Name	MOQ	OU
7100310930	xxx	3M™ VHB™ Tape RP+110GP, 19 mm x 3 m	58	Roll
7100307034	xxx	3M™ VHB™ Tape RP+110GP, 1120 mm x 66 m	1	Roll

Double Sided Tapes

3M™ VHB™ Tape RP+160GP

Dream, design, deliver with our 3M™ VHB™ Tape RP+160GP. It is a grey, 1.6 mm (62 mil), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its visco-elasticity and can bond to a variety of surfaces.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Grey, 1.6 mm (62 mil), multi-purpose adhesive and conformable acrylic foam core for good performance in a variety of applications
- Virtually invisible fastening keeps surfaces smooth



Product ID	Part Number	Product Name	MOQ	OU
7100309949	xxx	3M™ VHB™ Tape RP+160GP, 19 mm x 3 m	58	Roll
7100307062	xxx	3M™ VHB™ Tape RP+160GP, 1120 mm x 33 m	1	Roll

3M™ VHB™ Tape RP+230GP

Dream, design, deliver with our 3M™ VHB™ Tape RP+230GP. It is a grey, 2.3 mm (90 mil), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its visco-elasticity and can bond to a variety of surfaces.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Grey, 2.3 mm (90 mil), multi-purpose adhesive and conformable acrylic foam core for good performance in a variety of applications
- Virtually invisible fastening keeps surfaces smooth



Product ID	Part Number	Product Name	MOQ	OU
7100309726	xxx	3M™ VHB™ Tape RP+230GP, 19 mm x 3 m	58	Roll
7100307061	xxx	3M™ VHB™ Tape RP+230GP, 1120 mm x 33 m	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 4646

Dream, Design, Deliver with our 3M™ VHB™ Tape 4646. It is a dark grey, 0.6 mm thick, general purpose adhesive with firm foam that has the added feature of high temperature resistance. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of high surface energy substrates.




- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

Product ID	Part Number	Product Name	MOQ	OU
7000072200	xxx	3M™ VHB™ Tape 4646F, Grey, 6 mm x 33 m, 0.6 mm	96	Roll
7000072201	xxx	3M™ VHB™ Tape 4646F, Grey, 9 mm x 33 m, 0.6 mm	64	Roll
7000072202	xxx	3M™ VHB™ Tape 4646F, Grey, 12 mm x 33 m, 0.6 mm	6	Roll
7000072204	xxx	3M™ VHB™ Tape 4646F, Grey, 19 mm x 33 m, 0.6 mm	4	Roll
7000072205	xxx	3M™ VHB™ Tape 4646F, Grey, 25 mm x 33 m, 0.6 mm	3	Roll
7000072206	xxx	3M™ VHB™ Tape 4646F, Grey, 50 mm x 33 m, 0.6 mm	24	Roll
7000072197	xxx	3M™ VHB™ Tape 4646F, Grey, 295 mm x 33 m, 0.6 mm	1	Roll
7000072198	xxx	3M™ VHB™ Tape 4646F, Grey, 590 mm x 33 m, 0.6 mm	2	Roll
7000072199	xxx	3M™ VHB™ Tape 4646F, Grey, 1200 mm x 66 m, 0.6 mm	1	Roll

3M™ VHB™ Tape 4611F

Dream, Design, Deliver with our 3M™ VHB™ Tape 4611F. It is a dark grey, 1.1 mm thick, general purpose adhesive with firm foam that has the added feature of high temperature resistance. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of high surface energy substrates.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

Product ID	Part Number	Product Name	MOQ	OU
7000033105	xxx	3M™ VHB™ Tape 4611F, Dark Grey, 6 mm x 33 m, 1.1 mm	12	Roll
7000033106	xxx	3M™ VHB™ Tape 4611F, Dark Grey, 9 mm x 33 m, 1.1 mm	8	Roll
7000072169	xxx	3M™ VHB™ Tape 4611F, Dark Grey, 12 mm x 33 m, 1.1 mm	6	Roll
7000072168	xxx	3M™ VHB™ Tape 4611F, Dark Grey, 19 mm x 3 m, 1.1 mm, Short roll	48	Roll
7000072164	xxx	3M™ VHB™ Tape 4611F, Dark Grey, 19 mm x 33 m, 1.1 mm	4	Roll
7000072171	xxx	3M™ VHB™ Tape 4611F, Dark Grey, 25 mm x 33 m, 1.1 mm	3	Roll
7000072165	xxx	3M™ VHB™ Tape 4611F, Dark Grey, 38 mm x 33 m, 1.1 mm	2	Roll
7000072166	xxx	3M™ VHB™ Tape 4611F, Dark Grey, 50 mm x 33 m, 1.1 mm	1	Roll
7000072160	xxx	3M™ VHB™ Tape 4611F, Dark Grey, 295 mm x 33 m, 1.1 mm	1	Roll
7100003021	xxx	3M™ VHB™ Tape 4611F, Dark Grey, 1180 mm x 33 m, 1.1 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 4655F

Dream, Design, Deliver with our 3M™ VHB™ Tape 4655F. It is a dark grey, 1.6 mm thick, general purpose adhesive with firm foam that has the added feature of high temperature resistance. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of high surface energy substrates.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth



Product ID	Part Number	Product Name	MOQ	OU
7000072216	xxx	3M™ VHB™ Tape 4655F, Grey, 12 mm x 33 m, 1.6 mm	6	Roll
7000072217	xxx	3M™ VHB™ Tape 4655F, Grey, 19 mm x 33 m, 1.6 mm	4	Roll
7000072218	xxx	3M™ VHB™ Tape 4655F, Grey, 25 mm x 33 m, 1.6 mm	3	Roll
7000072212	xxx	3M™ VHB™ Tape 4655F, Grey, 295 mm x 33 m, 1.6 mm	1	Roll

3M™ VHB™ Tape 4930F

3M™ VHB™ Tape 4930F replaces screws, rivets and studs to permanently adhere one substrate to another while spreading the stress load across the entire length of the joint. 3M™ VHB™ tape has general purpose adhesive on both sides of firm type foam. It is white, 0.6 mm thick and bonds to many high surface energy substrates.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth



Product ID	Part Number	Product Name	MOQ	OU
7100262599	xxx	3M™ VHB™ Tape 4930F, White, 19 mm x 33 m, 0.6 mm	4	Roll

3M™ VHB™ Tape 4930P

3M™ VHB™ Tape 4930 replaces screws, rivets and studs to permanently adhere one substrate to another while spreading the stress load across the entire length of the joint. 3M™ VHB™ tape has general purpose adhesive on both sides of firm type foam. It is white, 0.6 mm thick and bonds to many high surface energy substrates.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth



Product ID	Part Number	Product Name	MOQ	OU
7100262616	xxx	3M™ VHB™ Tape 4930P, White, 12 mm x 33 m, 0.6 mm	6	Roll
7100262614	xxx	3M™ VHB™ Tape 4930P, White, 19 mm x 33 m, 0.6 mm	4	Roll
7100262590	xxx	3M™ VHB™ Tape 4930P, White, 50 mm x 33 m, 0.6 mm	1	Roll
7100262591	xxx	3M™ VHB™ Tape 4930P, White, 580 mm x 33 m, 0.6 mm	1	Roll
7100262619	xxx	3M™ VHB™ Tape 4930P, White, 1190 mm x 33 m, 0.6 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 4950

3M™ VHB™ Tape 4950 replaces screws, rivets and studs to permanently adhere one substrate to another while spreading the stress load across the entire length of the joint. 3M™ VHB™ tape has general purpose adhesive on both sides of firm type foam. It is white, 1.1 mm thick and bonds to many high surface energy substrates.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

Product ID	Part Number	Product Name	MOQ	OU
7100262606	xxx	3M™ VHB™ Tape 4950F, White, 19 mm x 33 m, 1.1 mm	4	Roll
7100262608	xxx	3M™ VHB™ Tape 4950F, White, 25 mm x 33 m, 1.1 mm	3	Roll
7100265731	xxx	3M™ VHB™ Tape 4950F, White, 890 mm x 33 m, 1.1 mm	1	Roll
7100262600	xxx	3M™ VHB™ Tape 4950F, White, 1180 mm x 33 m, 1.1 mm	1	Roll
7100262508	xxx	3M™ VHB™ Tape 4950P, White, 12 mm x 33 m, 1.1 mm	6	Roll
7100262507	xxx	3M™ VHB™ Tape 4950P, White, 19 mm x 33 m, 1.1 mm	4	Roll
7100262602	xxx	3M™ VHB™ Tape 4950P, White, 25 mm x 33 m, 1.1 mm	3	Roll
7100262858	xxx	3M™ VHB™ Tape 4950P, White, 295 mm x 33 m, 1.1 mm	1	Roll
7100262607	xxx	3M™ VHB™ Tape 4950P, White, 1180 mm x 33 m, 1.1 mm	1	Roll

3M™ VHB™ Tape 4912F

3M™ VHB™ Tape 4912F is a firm, white, 2 mm thick, double-sided, pressure-sensitive, closed-cell acrylic foam tape that bonds high surface energy substrates.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth


Product ID	Part Number	Product Name	MOQ	OU
7000072299	xxx	3M™ VHB™ Tape 4912F, White, 9 mm x 16.5 m, 2.0 mm	8	Roll
7000072300	xxx	3M™ VHB™ Tape 4912F, White, 12.0 mm x 16.5 m, 2.0 mm	6	Roll
7000072301	xxx	3M™ VHB™ Tape 4912F, White, 15 mm x 16.5 m, 2.0 mm	5	Roll
7000072302	xxx	3M™ VHB™ Tape 4912F, White, 19 mm x 16.5 m, 2.0 mm	4	Roll
7000072303	xxx	3M™ VHB™ Tape 4912F, White, 25 mm x 16.5 m, 2.0 mm	3	Roll
7000072296	xxx	3M™ VHB™ Tape 4912F, White, 285 mm x 16.5 m, 2.0 mm	1	Roll
7000033119	49121180	3M™ VHB™ Tape 4912F, White, 1180 mm x 16.5 m, 2.0 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Tape 4919F

Dream, Design, Deliver with our 3M™ VHB™ Tape 4919F. It is a black, 0.6 mm thick, multi-purpose acrylic adhesive with a conformable, foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a board variety of high and medium surface energy substrates and offers a good plastiziser resistance.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth



Product ID	Part Number	Product Name	MOQ	OU
7000072325	xxx	3M™ VHB™ Tape 4919F, Black, 6 mm x 33 m, 0.6 mm	12	Roll
7000072326	xxx	3M™ VHB™ Tape 4919F, Black, 9 mm x 33 m, 0.6 mm	8	Roll
7000072327	xxx	3M™ VHB™ Tape 4919F, Black, 12 mm x 33 m, 0.6 mm	6	Roll
7000072330	xxx	3M™ VHB™ Tape 4919F, Black, 19 mm x 33 m, 0.6 mm	4	Roll
7000072324	xxx	3M™ VHB™ Tape 4919F, Black, 295 mm x 33 m, 0.6 mm	1	Roll
7000072329	xxx	3M™ VHB™ Tape 4919F, Black, 1180 mm x 33 m, 0.6 mm	1	Roll

3M™ VHB™ Tape 4959F

3M™ VHB™ Tape 4959F is a firm, white, 3.0mm thick, double-sided, pressure-sensitive, closed-cell acrylic foam tape that bonds high surface energy substrates.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth



Product ID	Part Number	Product Name	MOQ	OU
7000072522	xxx	3M™ VHB™ Tape 4959F, White, 12 mm x 16.5 m, 3.0 mm	6	Roll
7000072523	xxx	3M™ VHB™ Tape 4959F, White, 15 mm x 16.5 m, 3.0 mm	5	Roll
7000072524	xxx	3M™ VHB™ Tape 4959F, White, 19 mm x 16.5 m, 3.0 mm	4	Roll
7000072525	xxx	3M™ VHB™ Tape 4959F, White, 25 mm x 33 m, 3.0 mm	3	Roll
7000033140	xxx	3M™ VHB™ Tape 4959F, White, 295 mm x 16.5 m, 3.0 mm	1	Roll

Double Sided Tapes

General Purpose Foam Tapes

3M™ Double Coated Urethane Foam Tape 4008

3M™ Double Coated Urethane Foam Tape 4008 is a white, 3.2 mm thick, double-coated, open-cell urethane foam tape with a paper liner that offers a high shear strength when used for interior mounting tasks.

- High shear strength on metal and high surface energy plastics
- Durable foam is ideal for interior mounting applications
- Off-white colour provides a clean appearance



Product ID	Part Number	Product Name	MOQ	OU
7000048482	xxx	3M™ Double Coated Urethane Foam Tape 4008, White, 19 mm x 33 m, 3.1 mm	12	Roll
7000048483	xxx	3M™ Double Coated Urethane Foam Tape 4008, White, 25 mm x 33 m, 3.1 mm	9	Roll

3M™ Double Coated Urethane Foam Tape 4016

3M™ Double Coated Urethane Foam Tape 4016 is a white, 1.6 mm thick, double-coated, open-cell urethane foam tape with a paper liner that offers a high shear strength when used for interior mounting tasks.

- High shear strength on metal and high surface energy plastics
- Durable foam is ideal for interior mounting applications
- Off-white colour provides a clean appearance



Product ID	Part Number	Product Name	MOQ	OU
7000049238	xxx	3M™ Double Coated Urethane Foam Tape 4016, Creme, 19 mm x 13.7 m, 1.6 mm	12	Roll

3M™ Double Coated Urethane Foam Tape 4026

3M™ 4026 Double Coated Urethane Foam Tape is a double sided, urethane foam tape that provides a strong and reliable bond on a variety of surfaces with a high shear strength. Perfect for interior mounting, bonding and attaching applications. It's designed to fill gaps and distribute stress uniformly over the bonded area.

- Durable foam is ideal for interior mounting, bonding and attaching applications
- The open-cell, flexible urethane foam carrier dampens and prevents vibration
- Provides good insulating qualities



Product ID	Part Number	Product Name	MOQ	OU
7000116037	xxx	3M™ Double Coated Urethane Foam Tape 4026, White, 6 mm x 33 m, 1.6 mm	39	Roll
7000116029	xxx	3M™ Double Coated Urethane Foam Tape 4026, White, 12 mm x 33 m, 1.6 mm	18	Roll
7000116030	xxx	3M™ Double Coated Urethane Foam Tape 4026, White, 15 mm x 33 m, 1.6 mm	15	Roll
7100040051	xxx	3M™ Double Coated Urethane Foam Tape 4026, White, 19 mm x 10 m, 1.6 mm	10	Roll
7000042390	xxx	3M™ Double Coated Urethane Foam Tape 4026, White, 19 mm x 33 m, 1.6 mm	12	Roll
7000116035	xxx	3M™ Double Coated Urethane Foam Tape 4026, White, 19 mm x 33 m, 1.6 mm	4	Roll
7000116031	xxx	3M™ Double Coated Urethane Foam Tape 4026, White, 25 mm x 33 m, 1.6 mm	9	Roll
7000116032	xxx	3M™ Double Coated Urethane Foam Tape 4026, White, 38 mm x 33 m, 1.6 mm	6	Roll
7000116033	xxx	3M™ Double Coated Urethane Foam Tape 4026, White, 50 mm x 33 m, 1.6 mm	5	Roll

Double Sided Tapes

3M™ Double Coated Urethane Foam Tape 4032

3M™ 4032 Double Coated Urethane Foam Tape is a double sided, urethane foam tape that provides a strong and reliable bond on a variety of surfaces with a high shear strength. Perfect for interior mounting, bonding and attaching applications. It's designed to fill gaps and distribute stress uniformly over the bonded area.

- Durable foam is ideal for interior mounting, bonding and attaching applications
- The open-cell, flexible urethane foam carrier dampens and prevents vibration
- Provides good insulating qualities



Product ID	Part Number	Product Name	MOQ	OU
7000116019	xxx	3M™ Double Coated Urethane Foam Tape 4032, White, 12 mm x 66 m, 0.8 mm	18	Roll
7000116020	xxx	3M™ Double Coated Urethane Foam Tape 4032, White, 15 mm x 66 m, 0.8 mm	15	Roll
7100040684	xxx	3M™ Double Coated Urethane Foam Tape 4032, White, 19 mm x 10 m, 0.8 mm	10	Roll
7000042389	xxx	3M™ Double Coated Urethane Foam Tape 4032, White, 19 mm x 66 m, 0.8 mm	12	Roll
7000116021	xxx	3M™ Double Coated Urethane Foam Tape 4032, White, 25 mm x 66 m, 0.8 mm	9	Roll
7000116022	xxx	3M™ Double Coated Urethane Foam Tape 4032, White, 38 mm x 66 m, 0.8 mm	6	Roll
7000116023	xxx	3M™ Double Coated Urethane Foam Tape 4032, White, 50 mm x 66 m, 0.8 mm	5	Roll

3M™ Double Coated Polyethylene Foam Tape 4492 Black

3M™ Double Coated Polyethylene Foam Tape 4492 is a black or white, closed-cell, polyethylene foam carrier. It is formulated for more demanding indoor and outdoor mounting and bonding applications. A noted feature of Foam Tape 4492 is its ability to conform and bond to irregular surfaces. It offers good temperature resistance and long term durability.

- Black or white, 0.031 in. (0.8 mm) closed-cell polyethylene foam carrier
- High ultimate adhesion to a wide variety of surfaces
- Conformable tape bonds to irregular surfaces



Product ID	Part Number	Product Name	MOQ	OU
7000048897	xxx	3M™ Double Coated Polyethylene Foam Tape 4492B, Black, 1219 mm x 160 m, 0.79 mm	1	Roll

3M™ Double Coated Foam Tape 9508B

3M™ Double Coated Foam Tape 9508B is a black, 0.8mm thick, double coated closed-cell polyethylene foam tape with an acrylic adhesive.

- Black, 0.8 mm thick, closed-cell double coated polyethylene foam with acrylic adhesive
- Mount and join a wide range of materials
- Intended applications are e.g. assembly of displays (POS), light weight emblems, name plates, etc..



Product ID	Part Number	Product Name	MOQ	OU
7000096245	xxx	3M™ Double Coated Foam Tape 9508B, Black, 19 mm x 66 m, 0.8 mm	16	Roll
7000096252	9508B150	3M™ Double Coated Foam Tape 9508B, Black, 1500 mm x 66 m, 0.8 mm	1	Roll
7000035433	xxx	3M™ Double Coated Foam Tape 9508BF, Black, 1500 mm x 66 m, 0.8 mm	4	Roll

Double Sided Tapes

3M™ Double Coated Foam Tape 9508W

3M™ Double Coated Foam Tape 9508W is a white, 0.8mm thick, double coated closed-cell polyethylene foam tape with acrylic adhesive.

- White, 0.8 mm thick, closed-cell double coated polyethylene foam with acrylic adhesive
- Mount and join a wide range of materials
- Intended applications are e.g. assembly of displays (POS), light weight emblems, name plates, etc..



Product ID	Part Number	Product Name	MOQ	OU
7000096243	xxx	3M™ Double Coated Foam Tape 9508W, White, 12 mm x 66 m, 0.8 mm	24	Roll
7000096248	xxx	3M™ Double Coated Foam Tape 9508W, White, 19 mm x 66 m, 0.8 mm	16	Roll
7000035435	xxx	3M™ Double Coated Foam Tape 9508W, White, 1500 mm x 66 m, 0.8 mm	1	Roll

3M™ Double Coated Foam Tape 9515B

3M™ Double Coated Foam Tape 9515B for permanently attaching or mounting components indoors and outdoors such as e.g. Holders, hooks, signs, mirrors, frames, moldings etc.

- Ideal for assembling low cost materials
- For bonding glass and transparent plastics
- Can be used with polycarbonate, acrylic, PVC



Product ID	Part Number	Product Name	MOQ	OU
7000096244	xxx	3M™ Double Coated Foam Tape 9515B, Black, 19 mm x 33 m, 1.5 mm	16	Roll
7000096250	xxx	3M™ Double Coated Foam Tape 9515BF, Black, 1500 mm x 33 m, 1.5 mm	1	Roll

3M™ Double Coated Foam Tape 9515W

3M™ Double Coated Foam Tape 9515W is a white, 1.5 mm thick, double coated polyethylene foam tape with acrylic adhesive.

- White, 1.5 mm thick, closed-cell double coated polyethylene foam with acrylic adhesive
- Mount and join a wide range of materials
- Intended applications are e.g. assembly of displays (POS), light weight emblems, name plates, etc..



Product ID	Part Number	Product Name	MOQ	OU
7000096242	xxx	3M™ Double Coated Foam Tape 9515W, White, 12 mm x 33 m, 1.5 mm	24	Roll
7000096247	xxx	3M™ Double Coated Foam Tape 9515W, White, 19 mm x 33 m, 1.5 mm	16	Roll
7000035434	xxx	3M™ Double Coated Foam Tape 9515W, White, 1500 mm x 33 m, 1.5 mm	1	Roll

Double Sided Tapes

3M™ Double Coated Polyethylene Foam Tape 9520BF

3M™ Double Coated Foam Tape 9520BF is a double sided black polyethylene foam laminated with an acrylic adhesive. This acrylic adhesive provides good initial tack and good adhesion on a wide variety of substrates.

- Wide temperature range
- Can be used during powder-painting processes
- Suitable for outdoor installations



Product ID	Part Number	Product Name	MOQ	OU
7000096253	xxx	3M™ Double Coated Polyethylene Foam Tape 9520BF, Black, 1000 mm x 66 m	1	Roll

3M™ Double Coated Foam Tape 9528

3M™ Double Coated Foam Tape 9528 is a 0.8 mm thick, closed-cell double coated polyethylene foam with a rubber adhesive. It is a high grab adhesive suitable for lower performance applications.

- 0.8 mm thick, closed-cell double coated polyethylene foam with rubber based adhesive
- Apply for lower performance applications
- Intended applications are e.g. assembly of displays (POS), light weight emblems, name plates, etc..



Product ID	Part Number	Product Name	MOQ	OU
7000041758	xxx	3M™ Double Coated Foam Tape 9528, White 12 mm x 66 m, 0.8 mm	18	Roll
7000035443	xxx	3M™ Double Coated Foam Tape 9528, White 1220 mm x 66 m, 0.8 mm	1	Roll
7000110852	xxx	3M™ Double Coated Foam Tape 9528, White, 12 mm x 25 mm, 0.8 mm	12	Each
7000096451	xxx	3M™ Double Coated Foam Tape 9528, White, 19 mm x 66 m, 0.8 mm	16	Roll
7000096445	xxx	3M™ Double Coated Foam Tape 9528W, White, 25 mm x 66 m, 0.8 mm	12	Roll

3M™ Double Coated Foam Tape 9536

3M™ Double Coated Foam Tape 9536 is white, 1.0 mm thick, coated on both sides with a rubber based adhesive

- White, 1mm thick, double coated polyethylene foam with rubber based adhesive
- Mount and join a wide range of materials
- It adheres well among other things on apolar substrates.



Product ID	Part Number	Product Name	MOQ	OU
7000111566	xxx	3M™ Double Coated Foam Tape 9536, White 19 mm x 66 m	12	Roll
7000035441	xxx	3M™ Double Coated Foam Tape 9536, White, 1500 mm x 66 m	8	Roll

Double Sided Tapes

3M™ Double Coated Polyethylene Foam Tape 9546

3M™ 9546 Double Coated Polyethylene Foam Tape is a double sided, general purpose polyethylene foam tape, formulated to bond many medium-high surface energy plastics

- Durable foam is ideal for interior mounting, bonding and attaching applications
- The foam dampens and prevents vibration
- Provides good insulating qualities



Product ID	Part Number	Product Name	MOQ	OU
7000111563	xxx	3M™ Double Coated Polyethylene Foam Tape 9546, White 12 mm x 66 m, 1.1 mm	18	Roll
7000041773	xxx	3M™ Double Coated Polyethylene Foam Tape 9546, White 19 mm x 66 m, 1.1 mm	12	Roll
7000111564	xxx	3M™ Double Coated Polyethylene Foam Tape 9546, White, 25 mm x 66 m, 1.1 mm	9	Roll
7000041775	xxx	3M™ Double Coated Polyethylene Foam Tape 9546, White, 1250 mm x 66 m, 1.1 mm		Roll

3M™ Double Coated Foam Tape 8610W

3M™ Double Coated Foam Tape 8610W is a white double coated closed-cell polyethylene foam tape with acrylic adhesive.

- This product is designed for general purpose mounting and joining.
- Intended applications are e.g. assembly of displays (POS), light weight emblems, name plates, etc..
- Surfaces and conditions for removal should be tested by the user to determine fitness for the users' particular purpose



Product ID	Part Number	Product Name	MOQ	OU
7000096450	xxx	3M™ Double Coated Foam Tape 8610W, White, 19 mm x 66 m, 1.0 mm	16	Roll
7000035444	xxx	3M™ Double Coated Foam Tape 8610W, White, 1500 mm x 66 m, 1.0 mm	1	Roll

3M™ High Grade Double Coated Foam Tape 4614F

Dream, Design, Deliver with 3M™ High Grade Double Coated Foam Tape 4614F. It is a clear, 0.8 mm thick, general purpose acrylic adhesive on both sides of a firm, foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces. It is colourless making it ideal for bonding transparent materials or for applications where a coloured bond line is unacceptable.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth, even edges are invisible due to its transparency



Product ID	Part Number	Product Name	MOQ	OU
7000072183	xxx	3M™ High Grade Double Coated Foam Tape 4614F, Transparent, 12 mm x 33 m, 0.8 mm	6	Roll
7000072184	xxx	3M™ High Grade Double Coated Foam Tape 4614F, Transparent, 19 mm x 33 m, 0.8 mm	16	Roll
7000033109	xxx	3M™ High Grade Double Coated Foam Tape 4614F, Transparent, 600 mm x 33 m, 0.8 mm	1	Roll

Double Sided Tapes

3M™ Double Coated Removable Foam Tape 4656

3M™ Removable Foam Tape 4656 is a general purpose medium tack pressure sensitive adhesive tape.



- Bonds stainless trim to metal frames
- Clear
- Clean removal

Product ID	Part Number	Product Name	MOQ	OU
7000072222	xxx	3M™ Double Coated Removable Foam Tape 4656F, Yellow, 9 mm x 33 m, 0.6 mm	4	Roll
7000070515	xxx	3M™ Double Coated Removable Foam Tape 4656P, Yellow, 25 mm x 12 mm, 0.6 mm	5	Pack

3M™ Double Coated Removable Foam Tape 4658

3M™ Double Coated Removable Foam Tape 4658 is a clear, closed-cell, acrylic foam carrier. It is formulated for indoor and outdoor mounting and bonding applications where clean removability is needed. It offers good temperature resistance and long term durability.



- Bonds stainless trim to metal frames
- Clear
- Clean removal

Product ID	Part Number	Product Name	MOQ	OU
7000072225	xxx	3M™ Double Coated Removable Foam Tape 4658, Transparent, 8 mm x 25 m, 0.8 mm	75	Roll
7000072226	xxx	3M™ Double Coated Removable Foam Tape 4658, Transparent, 600 mm x 25 m, 0.8 mm	2	Roll
7000072230	xxx	3M™ Double Coated Removable Foam Tape 4658F, Transparent 19 mm x 25 m, 0.8 mm	4	Roll
7000072229	xxx	3M™ Double Coated Removable Foam Tape 4658F, Transparent, 12 mm x 25 m, 0.8 mm	6	Roll
7000073335	xxx	3M™ Double Coated Removable Foam Tape 4658F, Transparent, 19 mm x 5 m, 0.8 mm, Blister	10	Roll
7000072231	xxx	3M™ Double Coated Removable Foam Tape 4658F, Transparent, 25 mm x 25 m, 0.787 mm	3	Roll
7000033110	xxx	3M™ Double Coated Removable Foam Tape 4658F, Transparent, 295 mm x 25 m, 0.8 mm	1	Roll

Double Sided Tapes

Adhesive Transfer Tapes

3M™ VHB™ Adhesive Transfer Tape F9460PC

3M™ VHB™ Adhesive Transfer Tape F9460PC is a 50µm 100MP acrylic adhesive with 105µm #58 polycoated kraft paper liner - printed 3M



- 50µm transparent VHB™ transfer tape offers a thin profile combined with our high strength acrylic adhesive for a long-lasting bond
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and metal fabrication
- Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C

Product ID	Part Number	Product Name	MOQ	OU
7100031051	9460305	3M™ VHB™ Adhesive Transfer Tape F9460PC, Transparent, 305 mm x 55 m, 0.05 mm	4	Roll
7100031031	xxx	3M™ VHB™ Adhesive Transfer Tape F9460PC, Transparent, 610 mm x 55 m, 0.05 mm	1	Roll
7100030363	xxx	3M™ VHB™ Adhesive Transfer Tape F9460PC, Transparent, 1220 mm x 55 m, 0.05 mm	1	Roll
7100084705	xxx	3M™ VHB™ Adhesive Transfer Tape F9460PC, Transparent, 1524 mm x 55 m, 0.05 mm	1	Roll
7100104780	F9460PCCONFIG	3M™ VHB™ Adhesive Transfer Tape F9460PC, Transparent, Jumbo 1220 mm width, Configurable rolls	1	Roll

3M™ VHB™ Adhesive Transfer Tape 9460PC

3M™ Adhesive Transfer Tape 9460PC 50µm 100MP adhesive with 105µm #58 polycoated kraft paper liner - Unprinted



- 50µm transparent adhesive transfer tape with acrylic adhesive on a polycoated kraft paper liner. High performance industrial joining and metal fabrication
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and metal fabrication
- Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C

Product ID	Part Number	Product Name	MOQ	OU
7000070311	xxx	3M™ VHB™ Adhesive Transfer Tape 9460PC, Transparent, 1219 mm x 55 m, 0.05 mm	1	Roll

Double Sided Tapes

3M™ VHB™ Adhesive Transfer Tape F9469PC

3M™ VHB™ Adhesive Transfer Tape F9469PC 130µm 100MP high performance acrylic with 105µm #58 polycoated kraft paper liner - printed 3M



- 130µm transparent VHB™ transfer tape offers a thin profile combined with our high strength acrylic adhesive for a long-lasting bond
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and metal fabrication
- Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C

Product ID	Part Number	Product Name	MOQ	OU
7100031054	xxx	3M™ VHB™ Adhesive Transfer Tape F9469PC, Transparent, 19 mm x 55 m, 0.13 mm	240	Roll
7100031061	xxx	3M™ VHB™ Adhesive Transfer Tape F9469PC, Transparent, 305 mm x 55 m, 0.13 mm	1	Roll
7100029174	xxx	3M™ VHB™ Adhesive Transfer Tape F9469PC, Transparent, 610 mm x 55 m, 0.13 mm	1	Roll
7100029188	xxx	3M™ VHB™ Adhesive Transfer Tape F9469PC, Transparent, 610 mm x 329 m, 0.13 mm	1	Roll
7100029175	xxx	3M™ VHB™ Adhesive Transfer Tape F9469PC, Transparent, 1220 mm x 55 m, 0.13 mm	1	Roll
7100104783	F9469PCCONFIG	3M™ VHB™ Adhesive Transfer Tape F9469PC, Transparent, Jumbo 1.54 m width, Configurable rolls	1	Roll

3M™ VHB™ Adhesive Transfer Tape 9469PC

3M™ Adhesive Transfer Tape 9469, 130µm 100MP high performance acrylic with 105µm #58 polycoated kraft paper liner - unprinted.



- 130µm transparent adhesive transfer tape with acrylic adhesive on a polycoated kraft paper liner. High performance industrial joining and metal fabrication
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and metal fabrication
- Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C

Product ID	Part Number	Product Name	MOQ	OU
7000073375	xxx	3M™ VHB™ Adhesive Transfer Tape 9469PC, Transparent, 248 mm x 110 m, 0.13 mm	6	Roll
7100104784	9469PCCONFIG	3M™ VHB™ Adhesive Transfer Tape 9469PC, Transparent, Jumbo 1540 mm width, Configurable rolls	1	Roll

Double Sided Tapes

3M™ VHB™ Adhesive Transfer Tape F9473PC

3M™ VHB™ Adhesive Transfer Tape F9473PC 260µm 100MP high performance acrylic with 105µm #58 polycoated kraft paper liner - printed 3M



- 260µm transparant VHB™ transfer tape offers a thin profile combined with our high strength acrylic adhesive for a long-lasting bond
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and metal fabrication
- Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C

Product ID	Part Number	Product Name	MOQ	OU
7100104792	F9473PCCONFIG	3M™ VHB™ Adhesive Transfer Tape F9473PC, Jumbo 1540 mm width, Configurable rolls	1	Roll
7100030935	xxx	3M™ VHB™ Adhesive Transfer Tape F9473PC, Transparent, 12 mm x 55 m, 0.26 mm	18	Roll
7100031064	xxx	3M™ VHB™ Adhesive Transfer Tape F9473PC, Transparent, 19 mm x 55 m, 0.26 mm	12	Roll
7100029176	xxx	3M™ VHB™ Adhesive Transfer Tape F9473PC, Transparent, 25 mm x 55 m, 0.26 mm	9	Roll
7100030936	xxx	3M™ VHB™ Adhesive Transfer Tape F9473PC, Transparent, 597 mm x 55 m, 0.26 mm	1	Roll
7100031009	xxx	3M™ VHB™ Adhesive Transfer Tape F9473PC, Transparent, 1220 mm x 55 m, 0.26 mm	1	Roll
7100030360	xxx	3M™ VHB™ Adhesive Transfer Tape F9473PC, Transparent, 1524 mm x 329 m, 0.25 mm	1	Roll

3M™ VHB™ Adhesive Transfer Tape 9473PC

3M™ Adhesive Transfer Tape 9473PC 260µm 100MP high performance acrylic with 105µm #58 polycoated kraft paper liner - unprinted.



- 260µm transparant adhesive transfer tape with acrylic adhesive on a polycoated kraft paper liner. High performance industrial joining and metal fabrication
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and metal fabrication
- Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C

Product ID	Part Number	Product Name	MOQ	OU
7100042235	xxx	3M™ VHB™ Adhesive Transfer Tape 9473PC, Transparent, 610 mm x 55 m x 0.25 mm	1	Roll
7100038427	xxx	3M™ VHB™ Adhesive Transfer Tape 9473PC, Transparent, 1220 mm x 165 m, 0.25 mm	1	Roll
7100104791	9473PCCONFIG	3M™ VHB™ Adhesive Transfer Tape 9473PC, Transparent, Jumbo 1540 mm width, Configurable rolls	1	Roll

Double Sided Tapes

3M™ VHB™ Adhesive Transfer Tape 9469

3M™ Adhesive Transfer Tape 9469, 130µm 100MP high performance acrylic with 105µm #58 polycoated kraft paper liner - unprinted.



- 130µm transparent adhesive transfer tape with acrylic adhesive on a polycoated kraft paper liner. High performance industrial joining and metal fabrication
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and metal fabrication
- Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C

Product ID	Part Number	Product Name	MOQ	OU
7000073373	xxx	3M™ VHB™ Adhesive Transfer Tape 9469, Transparent, 127 mm x 165 m, 0.13 mm	30	Roll
7100192649	xxx	3M™ VHB™ Adhesive Transfer Tape 9469, Transparent, 590 mm x 329 m, 0.13 mm	2	Roll

3M™ Adhesive Transfer Tape 467MP

3M™ Adhesive Transfer Tape 467MP provides outstanding adhesion to metal and high surface energy plastics. 200MP adhesive delivers excellent shear strength to resist slippage and edge lifting. The tape is temporarily repositionable for placement accuracy. It also performs well after exposure to humidity and hot/cold temperatures. A PCK layflat liner helps prevent curling and buckling in the liner.



- 50µm adhesive transfer tape with acrylic adhesive on a polycoated kraft paper liner. Excellent shear strength, temperature resistance and chemical resistance.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process.
- Get outstanding adhesion to metal and high surface energy plastics

Product ID	Part Number	Product Name	MOQ	OU
7100021268	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 305 mm x 55 m, 0.05 mm	4	Roll
7100021933	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 305 mm x 110 m, 0.05 mm	1	Roll
7100021266	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 305 mm x 165 m	5	Roll
7100021265	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 330 mm x 55 m, 0.05 mm	4	Roll
7100023468	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 330 mm x 165 m, 0.05 mm	1	Roll
7100021267	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 508 mm x 55 m, 0.05 mm	1	Roll
7100021283	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 610 mm x 55 m, 0.05 mm	1	Roll
7100022040	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 610 mm x 110 m, 0.05 mm	1	Roll
7100023282	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 610 mm x 165 m, 0.05 mm	1	Roll
7100024647	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 1220 mm x 55 m x 0.05 mm	1	Roll
7100021286	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 1220 mm x 110 m x 0.05 mm	1	Roll
7100023283	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, 1220 mm x 165 m x 0.05 mm	1	Roll
7100104803	xxx	3M™ Adhesive Transfer Tape 467MP, Transparent, Jumbo 1540 mm width, 0.05 mm, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Adhesive Transfer Tape 467MPF

3M™ Adhesive Transfer Tape 467MPF provides outstanding adhesion to metal and high surface energy plastics. Our 200MP adhesive delivers excellent shear strength to resist slippage and edge lifting. The tape is temporarily repositionable for placement accuracy. It also performs well after exposure to humidity and hot/cold temperatures. The clear polyester liner allows for easy inspection of parts



- 50µm adhesive transfer tape with acrylic adhesive on a Clear Polyester Film (PET) liner. Excellent shear strength, temperature resistance and chemical resistance.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process.
- Outstanding adhesion to metal and high surface energy plastics with excellent shear strength to resist slippage and edge lifting, provides short term repositionability for placement accuracy

Product ID	Part Number	Product Name	MOQ	OU
7100044306	xxx	3M™ Adhesive Transfer Tape 467MPF, Transparent, 302 mm x 500 m, 0.05 mm	18	Roll
7100044308	xxx	3M™ Adhesive Transfer Tape 467MPF, Transparent, 610 mm x 165 m x 0.06 mm	1	Roll
7100044320	xxx	3M™ Adhesive Transfer Tape 467MPF, Transparent, 1220 mm x 165 m x 0.06 mm	1	Roll
7100104794	xxx	3M™ Adhesive Transfer Tape 467MPF, Transparent, Jumbo 1372 mm width, Configurable rolls	1	Roll

3M™ Adhesive Transfer Tape 468MP

3M™ Adhesive Transfer Tape 468MP get excellent shear strength, temperature and chemical resistance with our easy to apply 3M™ Adhesive Transfer Tape 468MP. It's an acrylic adhesive on a polycoated kraft paper liner and is ideal for die-cutting.



- 130µm adhesive transfer tape with acrylic adhesive on a polycoated kraft paper liner. Excellent shear strength, temperature resistance and chemical resistance.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process.
- Outstanding adhesion to metal and high surface energy plastics with excellent shear strength to resist slippage and edge lifting, provides short term repositionability for placement accuracy

Product ID	Part Number	Product Name	MOQ	OU
7100020587	xxx	3M™ Adhesive Transfer Tape 468MP, Transparent, 305 mm x 55 m, 0.13 mm	4	Roll
7100024646	xxx	3M™ Adhesive Transfer Tape 468MP, Transparent, 305 mm x 165 m, 0.13 mm	1	Roll
7100021262	xxx	3M™ Adhesive Transfer Tape 468MP, Transparent, 330 mm x 55 m, 0.13 mm	4	Roll
7100026753	xxx	3M™ Adhesive Transfer Tape 468MP, Transparent, 330 mm x 165 m, 0.13 mm	1	Roll
7100025495	xxx	3M™ Adhesive Transfer Tape 468MP, Transparent, 500 mm x 165 m, 0.13 mm	1	Roll
7100021264	xxx	3M™ Adhesive Transfer Tape 468MP, Transparent, 508 mm x 55 m, 0.13 mm	1	Roll
7100021280	xxx	3M™ Adhesive Transfer Tape 468MP, Transparent, 610 mm x 55 m x 0.13 mm	1	Roll
7100021269	xxx	3M™ Adhesive Transfer Tape 468MP, Transparent, 610 mm x 165 m, 0.13 mm	1	Roll
7100021285	xxx	3M™ Adhesive Transfer Tape 468MP, Transparent, 1220 mm x 55 m, 0.13 mm	1	Roll
7100021282	4681220	3M™ Adhesive Transfer Tape 468MP, Transparent, 1220 mm x 110 m x 0.13 mm	1	Roll
7100021281	xxx	3M™ Adhesive Transfer Tape 468MP, Transparent, 1220 mm x 165 m, 0.13 mm	1	Roll
7100021940	xxx	3M™ Adhesive Transfer Tape 468MP, Transparent, 1220 mm x 300 m, 0.13 mm	1	Roll
7100104804	468MPCONFIG	3M™ Adhesive Transfer Tape 468MP, Transparent, 1540 mm width, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Adhesive Transfer Tape 9773WL+

3M™ Adhesive Transfer Tape 9773WL+ is designed for permanently bonding plastics, foams, wood and textiles. The adhesive easily flows into crevices and voids without the addition of heat. Minimal pressure is required. This transfer tape features 3M™ Adhesive 300MP+, a high tack acrylic that delivers good initial bond and full adhesion within 48 – 72 hours.

- 75µm thick adhesive on 180µm #96 white polycoated kraft liner
- Good humidity, solvent, chemical and UV resistance
- Performs at temperatures up to 121°C



Product ID	Part Number	Product Name	MOQ	OU
7100312120	xxx	3M™ Adhesive Transfer Tape 9773WL+, Config Roll	1	Roll
7100321905	xxx	3M™ Adhesive Transfer Tape 9773WL+, Transparent, 80 mm x 220 m	3	Roll
7100321954	xxx	3M™ Adhesive Transfer Tape 9773WL+, Transparent, 1020 mm x 55 m	1	Roll

3M™ Adhesive Transfer Tape 9774WL+

3M™ Adhesive Transfer Tape 9774WL+ is designed for permanently bonding plastics, foams, wood and textiles. The adhesive easily flows into crevices and voids without the addition of heat. Minimal pressure is required. This transfer tape features 3M™ Adhesive 300MP+, a high tack acrylic that delivers good initial bond and full adhesion within 48 – 72 hours.

- 100µm thick adhesive on a 180µm #96 white polycoated kraft liner
- Exceptional humidity, solvent, chemical and UV resistance helps bond durability
- Performs at temperatures up to 121°C



Product ID	Part Number	Product Name	MOQ	OU
7100312119	xxx	3M™ Adhesive Transfer Tape 9774WL+, Config Roll	1	Roll
7100321906	xxx	3M™ Adhesive Transfer Tape 9774WL+, Transparent, 1524 mm x 55 m	1	Roll

3M™ Adhesive Transfer Tape 9775WL+

3M™ Adhesive Transfer Tape 9775WL+ is designed for permanently bonding plastics, foams, wood and textiles. The adhesive easily flows into crevices and voids without the addition of heat. Minimal pressure is required. This transfer tape features 3M™ Adhesive 300MP+, a high tack acrylic that delivers good initial bond and full adhesion within 48 - 72 hours.

- 127µm thick adhesive on a 180µm #96 white polycoated kraft liner
- Exceptional humidity, solvent, chemical and UV resistance helps bond durability
- Performs at temperatures up to 121°C



Product ID	Part Number	Product Name	MOQ	OU
7100321907	xxx	3M™ Adhesive Transfer Tape 9775WL+, Transparent, 1020 mm x 55 m	1	Roll
7100104768	xxx	3M™ Adhesive Transfer Tape 9775WL+, Transparent, 1540 mm, Configurable rolls	1	Roll
7100312118	xxx	3M™ Adhesive Transfer Tape 9775WL+, Transparent, 1540 mm, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Double Coated Tape 9832HL+

3M™ Double Coated Tape 9832HL+ provides high initial adhesion and good holding power on a variety of substrates. The thin, polyester film carrier provides dimensional stability and improved handling during slitting and die cutting. It is commonly used on particle board, melamine, HPL, wood, plywood, plastics and foam.



- Provides excellent adhesion to a wide variety of substrates, including many foams, plastics and felt
- Thin polyester film carrier adds dimensional stability and improved handling
- Used on particle board, melamine, HPL, wood, plywood, plastics and foam

Product ID	Part Number	Product Name	MOQ	OU
7100312122		3M™ Double Coated Tape 9832HL+, Config Roll		

3M™ Adhesive Transfer Tape 6035PC

3M™ Adhesive Transfer Tape 6035PC is a 127µm 300mp acrylic adhesive with a 107µm #58 polycoated kraft paper liner.



- Low fogging, double sided, acrylic adhesive tested to SAE J1756 specifications
- Provides excellent bond to a wide variety of surfaces
- Good shear and peel values to many substrates including plastics, wood, foam, fabric and metal

Product ID	Part Number	Product Name	MOQ	OU
7100032985	xxx	3M™ Adhesive Transfer Tape 6035PC, Transparent, 1524 mm x 165 m	1	Roll

3M™ Adhesive Transfer Tape 9471LE

3M™ Adhesive Transfer Tape 9471LE is a 50µm 300LSE high strength acrylic adhesive on a 107µm #58 polycoated craft paper liner



- 50µm 300LSE Adhesive Transfer Tape. Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to and lightly oiled metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties

Product ID	Part Number	Product Name	MOQ	OU
7100102241	9471LE25	3M™ Adhesive Transfer Tape 9471LE, Transparent, 25 mm x 160 m, 0.05 mm	24	Roll
7100089546	xxx	3M™ Adhesive Transfer Tape 9471LE, Transparent, 305 mm x 165 m, 0.05 mm	1	Roll
7100089547	9471LE65	3M™ Adhesive Transfer Tape 9471LE, Transparent, 686 mm x 55 m, 0.05 mm	2	Roll
7100089545	xxx	3M™ Adhesive Transfer Tape 9471LE, Transparent, 686 mm x 165 m, 0.05 mm	1	Roll
7100090446	xxx	3M™ Adhesive Transfer Tape 9471LE, Transparent, 1372 mm x 165 m, 0.05 mm	1	Roll
7100104795	9471LECONFIG	3M™ Adhesive Transfer Tape 9471LE, Transparent, Jumbo 1372 mm width, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Adhesive Transfer Tape 9472LE

3M™ Adhesive Transfer Tape 9472LE is a 130µm 300LSE high strength acrylic adhesive on a 107µm #58 polycoated craft paper liner



- 127µm 300LSE Adhesive Transfer Tape. Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to and lightly oiled metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties

Product ID	Part Number	Product Name	MOQ	OU
7100089553	xxx	3M™ Adhesive Transfer Tape 9472LE, Transparent, 500 mm x 165 m, 0.13 mm	1	Roll
7100089551	xxx	3M™ Adhesive Transfer Tape 9472LE, Transparent, 685 mm x 165 m, 0.13 mm	1	Roll
7100089548	xxx	3M™ Adhesive Transfer Tape 9472LE, Transparent, 686 mm x 55 m, 0.13 mm	1	Roll
7100089550	xxx	3M™ Adhesive Transfer Tape 9472LE, Transparent, 1220 mm x 55 m, 0.13 mm	1	Roll
7100104796	9472LECONFIG	3M™ Adhesive Transfer Tape 9472LE, Transparent, Jumbo 1372 width, 0.13 mm, Configurable rolls	1	Roll

3M™ Adhesive Transfer Tape 9471FL

3M™ Adhesive Transfer Tape 9471FL O is a versatile, market proven, 50µm transfer tape on a release liner. Featuring 3M™ 300LSE acrylic adhesive, this tape has a long and proven history of reliably bonding a wide variety of similar and dissimilar materials such as metals, most plastics, glass, papers and painted surfaces.



- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties

Product ID	Part Number	Product Name	MOQ	OU
7000073424	9471FL13	3M™ Adhesive Transfer Tape 9471FL, Transparent, 1372 mm x 55 m, 0.05 mm	1	Roll

3M™ Adhesive Transfer Tape 9472FL

3M™ Adhesive Transfer Tape 9472FL is a 130µm 300LSE high strength acrylic adhesive on a 2 mil polyester film



- 127µm 300LSE Adhesive Transfer Tape. Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to and lightly oiled metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties

Product ID	Part Number	Product Name	MOQ	OU
7000049243	xxx	3M™ Adhesive Transfer Tape 9472FL, Transparent, 1372 mm x 165 m, 0.13 mm	1	Roll

Double Sided Tapes

3M™ Adhesive Transfer Tape 9671LE

3M™ Adhesive Transfer Tape 9671LE O is a versatile, market proven, 50µm transfer tape on a printed release paper liner. Featuring 3M™ 300LSE acrylic adhesive, this tape has a long and proven history of reliably bonding a wide variety of similar and dissimilar materials such as metals, most plastics, glass, papers and painted surfaces.

- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties



Product ID	Part Number	Product Name	MOQ	OU
7100089557	xxx	3M™ Adhesive Transfer Tape 9671LE Transparent, 1372 mm x 165 m, 0.06 mm	1	Roll
7100089558	xxx	3M™ Adhesive Transfer Tape 9671LE, Transparent, 686 mm x 165 m, 0.06 mm	1	Roll
7100104774	9671LECONFIG	3M™ Adhesive Transfer Tape 9671LE, Transparent, Jumbo 1372 mm width, Configurable rolls	1	Roll

3M™ Adhesive Transfer Tape 9672LE

3M™ Adhesive Transfer Tape 9672LE is a versatile, market proven, 127µm transfer tape on a printed release paper liner. Featuring 3M™ 300LSE acrylic adhesive, this tape has a long and proven history of reliably bonding a wide variety of similar and dissimilar materials such as metals, most plastics, glass, papers and painted surfaces.

- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties



Product ID	Part Number	Product Name	MOQ	OU
7100153134	xxx	3M™ Adhesive Transfer Tape 9672LE, Transparent, 1372 mm x 55 m, 0.13 mm	1	Roll
7100104775	9672LECONFIG	3M™ Adhesive Transfer Tape 9672LE, Transparent, Jumbo 1372 mm width, Configurable rolls	1	Roll

3M™ Adhesive Transfer Tape 9453LE

3M™ Adhesive Transfer Tape 9453LE is a versatile, market proven, 3.5 mil (0.9 mm) transfer tape on a printed release paper liner. Featuring 3M™ 300LSE acrylic adhesive, this tape has a long and proven history of reliably bonding a wide variety of similar and dissimilar materials such as metals, most plastics, glass, papers and painted surfaces.

- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties



Product ID	Part Number	Product Name	MOQ	OU
7100104797	9453LECONFIG	3M™ Adhesive Transfer Tape 9453LE, Transparent, 0.09 mm, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Double Coated Tape 9495LE

3M™ Double Coated Tape 9495LE provides high bond strength to most surfaces, including many low surface energy plastics such as polypropylene and powder coated paints. The acrylic adhesive also provides excellent adhesion to surfaces contaminated lightly with oil typically used with machine parts.

- Adds dimensional stability to foams and other substrates and also makes it easier to handle the tape during slitting and die-cutting
- 3M™ Double Coated Tape 9495LE features a dual liner for ease in selective die cutting
- The bond strength of 3M™ Laminating Adhesive 300LSE increases as a function of time and temperature, and has very high initial adhesion




Product ID	Part Number	Product Name	MOQ	OU
7000048873	9495LE68	3M™ Double Coated Tape 9495LE, Transparent, 686 mm x 165 m, 0.17 mm	1	Roll

3M™ Double Coated Tape 93010LE

Comprised of a polyester film backing with a layer of adhesive on each side, 3M™ Double Coated Tape 93010LE is a market proven, double coated transfer tape with good anti-lifting properties. This tape bonds well to similar and dissimilar materials including, metals, most plastics, glass, papers and painted surfaces.

- Polyester film carrier provides dimensional stability to foams and other substrates to make tape easier to handle during slitting and die-cutting
- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates



Product ID	Part Number	Product Name	MOQ	OU
7100090427	93010LOG	3M™ Double Coated Tape 93010LE, Transparent, 1372 mm x 55 m, 0.15 mm	1	Roll
7100104769	93010LECONFIG	3M™ Double Coated Tape 93010LE, Transparent, Thickness 0.15 mm, Configurable rolls	1	Roll

3M™ Double Coated Tape 93015LE

Comprised of a polyester film backing with a layer of adhesive on each side, 3M™ Double Coated Tape 93015LE is a market proven, double coated transfer tape with good anti-lifting properties. This tape bonds well to similar and dissimilar materials including, metals, most plastics, glass, papers and painted surfaces.

- Polyester film carrier provides dimensional stability to foams and other substrates to make tape easier to handle during slitting and die-cutting
- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates



Product ID	Part Number	Product Name	MOQ	OU
7100148994	xxx	3M™ Double Coated Tape 93015LE, Transparent, 700 mm x 1000 mm, 0.15 mm	1	Case
7100089499	xxx	3M™ Double Coated Tape 93015LE, Transparent, 1372 mm x 55 m, 0.15 mm	1	Roll
7100104770	93015LECONFIG	3M™ Double Coated Tape 93015LE, Transparent, Thickness 0.15 mm, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Double Coated Tape 93020LE

Comprised of a polyester film backing with a layer of adhesive on each side, 3M™ Double Coated Tape 93020LE is a market proven, double coated transfer tape with good anti-lifting properties. This tape bonds well to similar and dissimilar materials including, metals, most plastics, glass, papers and painted surfaces.



- Polyester film carrier provides dimensional stability to foams and other substrates to make tape easier to handle during slitting and die-cutting
- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates

Product ID	Part Number	Product Name	MOQ	OU
7100089541	xxx	3M™ Double Coated Tape 93020LE, Transparent, 1372 mm x 55 m, 0.2 mm	1	Roll
7100104771	93020LECONFIG	3M™ Double Coated Tape 93020LE, Transparent, Configurable	1	Roll

3M™ Double Coated Tape GPT-020

Designed for Versatility: 3M™ Double coated tape GPT-020P is a transparent, 200 micron thick, modified solventless acrylic adhesive with a white printed PCK paper liner. 3M GPT-020P combines a high level of peel and shear performance enabling high adhesion to a wide variety of substrates both to high and some low surface energy substrates.



- Providing versatility with purpose with the capability to bond to a wide variety of substrates from high to low surface.
- High initial tack and humidity resistance
- High level of peel and shear performance.

Product ID	Part Number	Product Name	MOQ	OU
7100269835	GPT-020_9X50	3M™ Double Coated Tape GPT-020, Transparent, 9 mm x 50 m, 0.2 mm	27	Roll
7100269834	GPT-020_12X50	3M™ Double Coated Tape GPT-020, Transparent, 12 mm x 50 m, 0.2 mm	20	Roll
7100269550	GPT-020_15X50	3M™ Double Coated Tape GPT-020, Transparent, 15 mm x 50 m, 0.2 mm	16	Roll
7100269702	GPT-020_19X50	3M™ Double Coated Tape GPT-020, Transparent, 19 mm x 50 m, 0.2 mm	16	Roll
7100276858	GPT020PBLI19	3M™ Double Coated Tape GPT-020, Transparent, 19 mm x 50 m, 0.2 mm	4	Roll
7100269552	GPT-020_25X50	3M™ Double Coated Tape GPT-020, Transparent, 25 mm x 50 m, 0.2 mm	10	Roll
7100269704	GPT-020_38X50	3M™ Double Coated Tape GPT-020, Transparent, 38 mm x 50 m, 0.2 mm	10	Roll
7100269705	xxx	3M™ Double Coated Tape GPT-020, Transparent, 50 mm x 50 m, 0.2 mm	6	Roll
7100269603	GPT-020_1000X50	3M™ Double Coated Tape GPT-020, Transparent, 1000 mm x 50 m, 0.2 mm	1	Roll
7100269604	GPT-020_1540X50	3M™ Double Coated Tape GPT-020, Transparent, 1540 mm x 50 m, 0.2 mm	1	Roll
7100269551	GPT-020_1540X500	3M™ Double Coated Tape GPT-020, Transparent, 1540 mm x 500 m, 0.2 mm	1	Roll
7100264010	GPT-020_CONFIG	3M™ Double Coated Tape GPT-020, Transparent, 1540 mm, 0.2 mm Configurable rolls	1	Roll

Double Sided Tapes

3M™ Double Coated Tape GPT-020F

Designed for Versatility: 3M™ Double coated tape GPT-020F is a transparent, 200 micron thick, modified solventless acrylic adhesive with a white printed PP filmic liner. 3M GPT-020F combines a high level of peel and shear performance enabling high adhesion to a wide variety of substrates both to high and some low surface energy substrates.



- Providing versatility with purpose with the capability to bond to a wide variety of substrates from high to low surface.
- High initial tack and humidity resistance
- Easy handling and converting due to filmic liner delivery

Product ID	Part Number	Product Name	MOQ	OU
7100243948	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 6 mm x 5000 m, 0.2 mm	32	Roll
7100243949	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 9 mm x 3850 m, 0.2 mm	1	Roll
7100226020	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 12 mm x 50 m, 0.2 mm	24	Roll
7100243950	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 12 mm x 3850 m, 0.2 mm	1	Roll
7100226380	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 19 mm x 5 m, 0.2 mm	60	Roll
7100225996	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 19 mm x 50 m, 0.2 mm	15	Roll
7100243951	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 19 mm x 2000 mm, 0.2 mm	1	Roll
7100225997	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 25 mm x 50 m, 0.2 mm	11	Roll
7100224385	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 50 mm x 50 m, 0.2 mm	6	Roll
7100224321	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 100 mm x 50 m, 0.2 mm	5	Roll
7100223650	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 1540 mm x 50 m, 0.2 mm	1	Roll
7100224762	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 1540 mm x 500 m, 0.2 mm	1	Roll
7100220792	xxx	3M™ Double Coated Tape GPT-020F, Transparent, 1540 mm, 0.2mm, Config roll	1	Roll

Scotch® ATG Adhesive Transfer Tape 904

3M™ ATG Adhesive Transfer Tape 904 if you are a keen arts and crafts fan. It's quick and mess-free application is ideal for card making, scrapbooking and use with stationery. Our tape adheres instantly, has a long ageing bond and high shear force.



- Apply for instant adherence, a long ageing bond and high shear force
- Use if you're a keen arts and crafts fan
- Get quick and mess-free application

Product ID	Part Number	Product Name	MOQ	OU
7000116634	xxx	Scotch® ATG Adhesive Transfer Tape 904, Transparent, 6 mm x 25 m, 0.05 mm	72	Roll
7000116673	xxx	Scotch® ATG Adhesive Transfer Tape 904, Transparent, 6 mm x 44 m, 0.05 mm	48	Roll
7000116632	xxx	Scotch® ATG Adhesive Transfer Tape 904, Transparent, 12 mm x 25 m, 0.05 mm	1	Roll
7000042431	xxx	Scotch® ATG Adhesive Transfer Tape 904, Transparent, 12 mm x 33 m, 0.05 mm	12	Roll
7000116675	xxx	Scotch® ATG Adhesive Transfer Tape 904, Transparent, 12 mm x 44 m, 0.05 mm	72	Roll
7000116674	xxx	Scotch® ATG Adhesive Transfer Tape 904, Transparent, 12 mm x 44 m, 0.05 mm	36	Roll
7000116631	xxx	Scotch® ATG Adhesive Transfer Tape 904, Transparent, 19 mm x 25 m, 0.05 mm	48	Roll
7000116671	xxx	Scotch® ATG Adhesive Transfer Tape 904, Transparent, 19 mm x 44 m, 0.05 mm	24	Roll
7000116672	xxx	Scotch® ATG Adhesive Transfer Tape 904, Transparent, 19 mm x 44 m, 0.05 mm	48	Roll

Double Sided Tapes

Scotch® ATG Adhesive Transfer Tape 924

Scotch® ATG Adhesive Transfer Tape 924 apply for various substrate or material combinations. Our transfer film tape is an acrylic, reverse wound, pressure sensitive adhesive on a densified kraft paper liner, for use with Scotch® ATG Adhesive Applicators.



- A great go-to general purpose adhesive transfer film tape. Offers high adhesion, good solvent resistance, and excellent UV resistance.
- Get high adhesion, good solvent resistance, and excellent ultraviolet (UV) resistance
- The ATG tape system delivers a controlled application of the adhesive while the liner rewinds into the ATG applicator. It bonds on contact, and works on a variety of substrate or material combinations.

Product ID	Part Number	Product Name	MOQ	OU
7000116591	xxx	Scotch® ATG Adhesive Transfer Tape 924, Transparent, 6 mm x 33 m, 0.05 mm	72	Roll
7000116658	xxx	Scotch® ATG Adhesive Transfer Tape 924, Transparent, 6 mm x 55 m, 0.05 mm	48	Roll
7000042428	xxx	Scotch® ATG Adhesive Transfer Tape 924, Transparent, 12 mm x 33 m, 0.05 mm	12	Roll
7100030713	xxx	Scotch® ATG Adhesive Transfer Tape 924, Transparent, 12 mm x 33 m, 0.05 mm	12	Roll
7000116638	xxx	Scotch® ATG Adhesive Transfer Tape 924, Transparent, 12 mm x 55 m, 0.05 mm	72	Roll
7000116593	xxx	Scotch® ATG Adhesive Transfer Tape 924, Transparent, 19 m x 33 m, 0.05 mm	48	Roll
7000116639	xxx	Scotch® ATG Adhesive Transfer Tape 924, Transparent, 19 mm x 55 m, 0.05 mm	48	Roll

Scotch® ATG Adhesive Transfer Tape 926

Scotch® ATG Adhesive Transfer Tape 926 is ideal for applications requiring high bond strength, high shear strength and high temperature performance. It offers chemical, moisture and UV resistance. Reverse wound on a unique 1 inch core designed for use with a Scotch® ATG Applicator.



- A high performance adhesive transfer film tape that works a wide variety of substrates and materials. It offers excellent solvent resistance and can be used in high temperature applications.
- The ATG tape system delivers a controlled application of the adhesive while the liner rewinds into the ATG applicator. It bonds on contact, and works on a variety of substrate or material combinations.
- The ATG tape system is versatile, convenient, quick and easy to use. There is no mess or clean up. It is a cost effective replacement to rivets, staples, screws, bolts, liquid adhesives. Safer than hot melt adhesives.

Product ID	Part Number	Product Name	MOQ	OU
7000116661	xxx	Scotch® ATG Adhesive Transfer Tape 926, Transparent, 6 mm x 33 m, 0.13 mm	48	Roll
7000116644	xxx	Scotch® ATG Adhesive Transfer Tape 926, Transparent, 12 mm x 33 m, 0.13 mm	12	Roll

Double Sided Tapes

Scotch® ATG Adhesive Transfer Tape 928

Scotch® ATG Repositionable Double Coated Tissue Tape 928 is a reverse wound, double coated tape with a white tissue carrier on a polycoated kraft (PKC) paper liner. It is designed for use in applications where two separate, but different, adhesives are required. One side is intended for permanent bonding while the other offers low tack adhesion for removal or repositioning.



- A high tack - low tack repositionable pressure sensitive adhesive which allows removal from many papers, foils, and films.
- The ATG tape system delivers a controlled application of the adhesive while the liner rewinds into the ATG applicator. It bonds on contact, and works on a variety of substrate or material combinations.
- The ATG tape system is versatile, convenient, quick and easy to use. There is no mess or clean up. It is a cost effective replacement to rivets, staples, screws, bolts, liquid adhesives. Safer than hot melt adhesives.

Product ID	Part Number	Product Name	MOQ	OU
7000028874	xxx	Scotch® ATG Adhesive Transfer Tape 928, White, 12 mm x 16.5 m, 0.05 mm	72	Roll
7100016838	xxx	Scotch® ATG Adhesive Transfer Tape 928, White, 12 mm x 33 m, 0.05 mm	12	Roll
7000048496	xxx	Scotch® ATG Adhesive Transfer Tape 928, White, 19 mm x 16.5 m, 0.05 mm	12	Roll

Scotch® ATG Adhesive Transfer Tape 969

Scotch® ATG Adhesive Transfer Tape 969 features very high initial adhesion and good shear holding power for bonding most plastics and glossy coated materials. Reverse wound on 1-inch diameter core for use in Scotch® ATG Applicators.



- A soft pressure sensitive adhesive system that features high initial adhesion and good holding power to a variety of materials including most plastics.
- The ATG tape system delivers a controlled application of the adhesive while the liner rewinds into the ATG applicator. It bonds on contact, and works on a variety of substrate or material combinations.
- The ATG tape system is versatile, convenient, quick and easy to use. There is no mess or clean up. It is a cost effective replacement to rivets, staples, screws, bolts, liquid adhesives. Safer than hot melt adhesives.

Product ID	Part Number	Product Name	MOQ	OU
7000116611	xxx	Scotch® ATG Adhesive Transfer Tape 969, Transparent, 6 mm x 16.5 m, 0.13 mm	288	Roll
7000116660	xxx	Scotch® ATG Adhesive Transfer Tape 969, Transparent, 6 mm x 33 m, 0.13 mm	48	Roll
7000116652	xxx	Scotch® ATG Adhesive Transfer Tape 969, Transparent, 12 mm x 16.5 m, 0.13 mm	12	Roll
7000116642	xxx	Scotch® ATG Adhesive Transfer Tape 969, Transparent, 12 mm x 33 m, 0.13 mm	72	Roll
7000116653	xxx	Scotch® ATG Adhesive Transfer Tape 969, Transparent, 19 mm x 16.5 m, 0.13 mm	12	Roll
7000116643	xxx	Scotch® ATG Adhesive Transfer Tape 969, Transparent, 19 mm x 33 m, 0.13 mm	48	Roll
7000028865	xxx	Scotch® ATG Adhesive Transfer Tape 969, Transparent, 25 mm x 33 m, 0.13 mm	72	Roll

Double Sided Tapes

Scotch® ATG Adhesive Transfer Tape 976

Scotch® ATG Adhesive Transfer Tape 976 is ideal for bonding materials with glossy coatings where an aggressive adhesive with high initial adhesion and low profile is desired. It offers very good relative chemical and moisture resistance as well as medium-high UV resistance. Reverse wound on 1-inch diameter core for use in Scotch® ATG Applicators.



- A soft pressure sensitive adhesive system that features high initial adhesion and good holding power to a variety of materials including most plastics.
- The ATG tape system delivers a controlled application of the adhesive while the liner rewinds into the ATG applicator. It bonds on contact, and works on a variety of substrate or material combinations.
- The ATG tape system is versatile, convenient, quick and easy to use. There is no mess or clean up. It is a cost effective replacement to rivets, staples, screws, bolts, liquid adhesives. Safer than hot melt adhesives.

Product ID	Part Number	Product Name	MOQ	OU
7000116659	xxx	Scotch® ATG Adhesive Transfer Tape 976, Transparent, 6 mm x 55 m, 0.05 mm	48	Roll
7000116640	xxx	Scotch® ATG Adhesive Transfer Tape 976, Transparent, 12 mm x 55 m, 0.05 mm	72	Roll
7000116578	xxx	Scotch® ATG Adhesive Transfer Tape 976, Transparent, 19 mm x 25 m, 0.05 mm	48	Roll
7000116641	xxx	Scotch® ATG Adhesive Transfer Tape 976, Transparent, 19 mm x 55 m, 0.05 mm	48	Roll

Double Sided Tapes

Membrane Switch Spacers

3M™ Membrane Switch Spacer 7945MP

3M™ Membrane Switch Spacer 7945MP is a 50µm 200MP high performance acrylic adhesive double coated on each side of 25µm polyester film carrier on a double liner of 107µm #58 printed moisture resistant lay-flat polycoated kraft paper



- 127µm Double Lined Membrane Switch Spacer with 200MP adhesive. #58 lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting.
- Provides outstanding adhesion to metal and high surface energy plastics.

Product ID	Part Number	Product Name	MOQ	OU
7100040284	xxx	3M™ Membrane Switch Spacer 7945MP, Transparent, 457 mm x 0.61 m, 0.13 mm	1	Case
7100040451	xxx	3M™ Membrane Switch Spacer 7945MP, Transparent, 610 mm x 914 mm, 0.13 mm	1	Case
7100040452	xxx	3M™ Membrane Switch Spacer 7945MP, Transparent, 700 mm x 1000 mm, 0.13 mm	1	Case

3M™ Membrane Switch Spacer 7953MP

3M™ Membrane Switch Spacer 7953MP is a 38µm 200MP high-performance acrylic adhesive double coated on each side of 12µm polyester film carrier with double liner of 107µm #58 moisture resistant lay-flat polycoated kraft paper. Primary liner is printed.



- 90µm Double Lined Membrane Switch Spacer with 200MP adhesive. 58 lb lay-flat polycoated kraft paper liners on each side. Primary liner is printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.

Product ID	Part Number	Product Name	MOQ	OU
7100038656	xxx	3M™ Membrane Switch Spacer 7953MP, Transparent, 610 mm x 914 mm, 0.09 mm	1	Case
7100039642	xxx	3M™ Membrane Switch Spacer 7953MP, Transparent, 700 mm x 1000 mm, 0.09 mm	1	Case
7100104776	7953MPCONFIG	3M™ Membrane Switch Spacer 7953MP, Transparent, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Adhesive Transfer Tape Double Lined 7952MP

3M™ Adhesive Transfer Tape Double Lined 7952MP is a 50µm 200MP high performance acrylic adhesive on double liner of 107µm #58 polycoated kraft paper



- 50µm double lined version of 3M Adhesive Transfer Tape 467MP on two #58 polycoated kraft paper liners.
- Excellent moisture and solvent resistance. Excellent high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Ideal for graphic and nameplate attachment.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process. Smooth appearance on graphic overlays.

Product ID	Part Number	Product Name	MOQ	OU
7100038810	xxx	3M™ Adhesive Transfer Tape Double Lined 7952MP, 610 mm x 914 mm, 0.06 mm, CoA 100SH	1	Case
7100104786	7952MPCONFIG	3M™ Adhesive Transfer Tape Double Lined 7952MP, Jumbo 1220 mm width, Configurable rolls	1	Roll
7100038631	xxx	3M™ Adhesive Transfer Tape Double Lined 7952MP, Transparent, 700 mm x 1000 mm, 0.05 mm	1	Case
7100038963	xxx	3M™ Adhesive Transfer Tape Double Lined 7952MP, Transparent, 1270 mm x 330 m, 0.05 mm	2	Roll

3M™ Adhesive Transfer Tape Double Lined 7955MP

3M™ Adhesive Transfer Tape Double Lined 7955MP is a 127µm 200MP high performance acrylic adhesive on double liner of 107µm #58 polycoated kraft paper



- 127µm double lined version of 3M Adhesive Transfer Tape 468MP on two #58 polycoated kraft paper liners.
- Excellent moisture and solvent resistance. Excellent high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Use for selective die-cutting. Ideal for graphic and nameplate attachment.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process. Smooth appearance on graphic overlays. For selective die-cutting.

Product ID	Part Number	Product Name	MOQ	OU
7100038584	xxx	3M™ Adhesive Transfer Tape Double Lined 7955MP, Transparent, 610 mm x 914 mm, 0.13 mm	1	Case
7100040300	xxx	3M™ Adhesive Transfer Tape Double Lined 7955MP, Transparent, 700 mm x 1000 mm, 0.13 mm	1	Case
7100038693	xxx	3M™ Adhesive Transfer Tape Double Lined 7955MP, Transparent, 1270 mm x 329 m, 0.13 mm	1	Roll
7100104793	7955MPCONFIG	3M™ Adhesive Transfer Tape Double Lined 7955MP, Transparent, Jumbo 1220 mm width, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Membrane Switch Spacer 7956MP

3M™ Membrane Switch Spacer 7956MP is a 50µm 200MP high-performance acrylic adhesive double coated on each side of 50µm polyester film carrier with double liner of 107µm #58 moisture resistant lay-flat polycoated kraft

- 152µm Double Lined Membrane Switch Spacer with 200MP adhesive. #58 lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.



Product ID	Part Number	Product Name	MOQ	OU
7000071528	xxx	3M™ Membrane Switch Spacer 7956MP, Transparent, 86 mm x 425 m, 0.15 mm	1	Each
7100039643	xxx	3M™ Membrane Switch Spacer 7956MP, Transparent, 610 mm x 914 mm, 0.15 mm	1	Case
7100039644	xxx	3M™ Membrane Switch Spacer 7956MP, Transparent, 700 mm x 1000 mm, 0.15 mm	1	Case

3M™ Membrane Switch Spacer 7956WDL

3M™ Membrane Switch Spacer 7956WDL is a 152µm 3M™ High Performance Acrylic Adhesive 200MP tape with a 50µm Silver Polyester Film (PET) carrier on 107µm Tan #58 Polycoated Kraft Paper (PCK) liners.

- 152µm Double Lined Membrane Switch Spacer with 200MP adhesive on both sides of an opaque polyester film. #58 lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.



Product ID	Part Number	Product Name	MOQ	OU
7000049163	xxx	3M™ Membrane Switch Spacer 7956WDL, White, 610 mm x 914 mm, 0.15 mm	100	Sheet

3M™ Membrane Switch Spacer 7957MP

3M™ Membrane Switch Spacer 7957MP is a 50µm 200MP high-performance acrylic adhesive double coated on each side of 75µm polyester film carrier with double liner of 107µm #58 moisture resistant lay-flat polycoated kraft

- 175µm Double Lined Membrane Switch Spacer with 200MP adhesive. 58 lb lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting.
- Excellent moisture and solvent resistance. High temperature resistance. High shear strength accommodates the stresses of repeated actuation. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Use for selective die-cutting.



Product ID	Part Number	Product Name	MOQ	OU
7100040450	xxx	3M™ Membrane Switch Spacer 7957MP, Transparent, 610 mm x 165 m, 0.18 mm	2	Roll
7100040288	xxx	3M™ Membrane Switch Spacer 7957MP, Transparent, 610 mm x 914 mm, 0.18 mm	1	Case
7100039641	xxx	3M™ Membrane Switch Spacer 7957MP, Transparent, 700 mm x 1000 mm, 0.18 mm	1	Case

Double Sided Tapes

3M™ Membrane Switch Spacer 7959MP

3M™ Membrane Switch Spacer 7959MP is a 50µm 200MP high-performance acrylic adhesive double coated on each side of 127µm polyester film carrier with double liner of 107µm #58 moisture resistant lay-flat polycoated kraft

- 230µm Double Lined Membrane Switch Spacer with 200MP adhesive. 58 lb lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting.
- Excellent moisture and solvent resistance. High temperature resistance. High shear strength accommodates the stresses of repeated actuation. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Use for selective die-cutting.



Product ID	Part Number	Product Name	MOQ	OU
7100040126	xxx	3M™ Membrane Switch Spacer 7959MP, Transparent, 610 mm x 165 m, 0.23 mm	1	Roll
7100040287	xxx	3M™ Membrane Switch Spacer 7959MP, Transparent, 610 mm x 914 mm, 0.23 mm	1	Case
7100040285	xxx	3M™ Membrane Switch Spacer 7959MP, Transparent, 700 mm x 1000 mm, 0.23 mm	1	Case

3M™ Membrane Switch Spacer 7961MP

3M™ Membrane Switch Spacer 7961MP is a 50µm 200MP high-performance acrylic adhesive double coated on each side of 175µm polyester film carrier with double liner of 107 µm #58 moisture resistant lay-flat polycoated kraft

- 280µm Double Lined Membrane Switch Spacer with 200MP adhesive. 58 lb lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting.
- Excellent moisture and solvent resistance. High temperature resistance. High shear strength accommodates the stresses of repeated actuation. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Use for selective die-cutting.



Product ID	Part Number	Product Name	MOQ	OU
7100039117	xxx	3M™ Membrane Switch Spacer 7961MP, Transparent, 610 mm x 914 mm, 0.28 mm	1	Case
7100039413	xxx	3M™ Membrane Switch Spacer 7961MP, Transparent, 700 mm x 1000 mm, 0.28 mm	10	Case

Double Sided Tapes

3M™ Adhesive Transfer Tape Double Lined 7962MP

3M™ Adhesive Transfer Tape Double Lined 7962MP is a 50µm 200MP high performance acrylic adhesive on double liner of 107µm #58 polycoated kraft paper and 155µm #83 polycoated kraft paper.



- 127µm double lined version of 3M Adhesive Transfer Tape 467MP. #83 and #58 polycoated kraft paper liners.
- Excellent moisture and solvent resistance. Excellent high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Use for selective die-cutting. Ideal for graphic and nameplate attachment.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process. Smooth appearance on graphic overlays. Use for steel rule die-cutting and kiss cutting.

Product ID	Part Number	Product Name	MOQ	OU
7100039645	xxx	3M™ Adhesive Transfer Tape Double Lined 7962MP, Transparent, 610 mm x 914 mm, 0.06 mm	1	Case
7100040453	xxx	3M™ Adhesive Transfer Tape Double Lined 7962MP, Transparent, 700 mm x 1000 mm, 0.06 mm	1	Case

3M™ Adhesive Transfer Tape Double Lined 7965MP

3M™ Adhesive Transfer Tape Double Lined 7965MP is a 127µm 200MP high performance acrylic adhesive on double liner of 107µm #58 polycoated kraft paper and 155µm #83 polycoated kraft paper.



- 127µm double lined version of 3M Adhesive Transfer Tape 468MP. #83 and #58 polycoated kraft paper liners.
- Excellent moisture and solvent resistance. Excellent high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Use for selective die-cutting. Ideal for graphic and nameplate attachment.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process. Smooth appearance on graphic overlays. Use for steel rule die-cutting and kiss cutting.

Product ID	Part Number	Product Name	MOQ	OU
7100040454	xxx	3M™ Adhesive Transfer Tape Double Lined 7965MP, Transparent, 610 mm x 914 mm, 0.13 mm	1	Case
7100039813	xxx	3M™ Adhesive Transfer Tape Double Lined 7965MP, Transparent, 700 mm x 1 m, 0.13 mm	1	Case

3M™ Membrane Switch Spacer 7966MWS

3M™ Membrane Switch Spacer 7966MWS features a 2 mil white PET film carrier with a metallized vapor coat for added opacity, ideal for graphics. 3M™ High Performance Acrylic Adhesive 200MP delivers excellent shear strength during repeated switch actuation and forms clean edges for precise slitting and die-cutting. A PCK paper liner resists humidity and adds stability for improved sheet processing.



- Metallized vapor coat on white-colored carrier creates outstanding opacity for graphics
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.

Product ID	Part Number	Product Name	MOQ	OU
7000115755	xxx	3M™ Membrane Switch Spacer 7966MWS, 1220 mm x 165 m, Layflat Liner	1	Roll
7100073000	7966MWSCONFIG	3M™ Membrane Switch Spacer 7966MWS, White, Jumbo 1220 mm width, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Membrane Switch Spacer 7966WDL

3M™ Membrane Switch Spacer 7966WDL is a double lined 442µm 3M™ High Performance Acrylic Adhesive 200MP tape with a 50µm Silver Polyester Film (PET) carrier on 107µm Tan 58# Polycoated Kraft Paper (PCK) liners.

- 229µm Double Lined Membrane Switch Spacer with 200MP adhesive on both sides of an opaque polyester film. 50µm adhesive on face side and 127µm on back side. #58 lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.



Product ID	Part Number	Product Name	MOQ	OU
7000049683	xxx	3M™ Membrane Switch Spacer 7966WDL, White, 610 mm x 914 mm, 0.23 mm	1	Case

3M™ Membrane Switch Spacer 7974MP

3M™ Membrane Switch Spacer 7974MP is a 200MP high-performance acrylic adhesive double coated 75µm on face side and 127µm on back side of 127µm polyester film carrier with double liner of 127µm #58 moisture resistant lay-flat polycoated kraft paper. Primary liner is printed.

- 330µm Double Lined Membrane Switch Spacer with 200MP adhesive. #58 lay-flat polycoated kraft paper liners on each side. Primary liner is printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.



Product ID	Part Number	Product Name	MOQ	OU
7000049682	xxx	3M™ Membrane Switch Spacer 7974MP, Transparent, 610 mm x 914 mm, 0.107 mm	50	Sheet

3M™ Membrane Switch Spacer 7986MP

3M™ Membrane Switch Spacer 7986MP for high performance circuit separation in switches until actuation. Our spacer offers excellent resistance to chemicals, temperature and humidity. It withstands softening through edge contact with mild acids, alkalis, oil, gas, kerosene and other solvents.

- 350µm Double Lined Membrane Switch Spacer with 200MP adhesive. 250µm polyester film carrier #58 polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting.
- Provides excellent temperature, humidity and chemical resistance



Product ID	Part Number	Product Name	MOQ	OU
7100084174	xxx	3M™ Membrane Switch Spacer 7986MP, Transparent, 610 mm x 914 mm, 0.35 mm	10	Case

Double Sided Tapes

3M™ Membrane Switch Spacer 7993MP

3M™ Membrane Switch Spacer Single Coated 7993MP is a 50µm 200MP high performance acrylic adhesive on one side of a 25µm mil white polyester film carrier on a 175µm #94 polycoated kraft paper liner



- 75µm Membrane Switch Single Coated Spacer with 200MP Adhesive. 25µm mil clear polyester carrier. 94 lb lay-flat polycoated kraft paper liner.
- Clear polyester carrier brightens overlay and key pads eliminating need for floodcoat. Easy to die-cut and process. Smooth appearance on graphic overlays. Use for steel rule die-cutting and kiss cutting. Use to protect leads, hold domes in place or for building custom spacers.
- Excellent moisture and solvent resistance. Excellent temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Use for selective die-cutting.

Product ID	Part Number	Product Name	MOQ	OU
7100040455	xxx	3M™ Membrane Switch Spacer 7993MP, Transparent, 610 mm x 914 mm, 0.08 mm	1	Case

3M™ Membrane Switch Spacer 7995MP

3M™ Membrane Switch Spacer Single Coated 7995MP is a 50µm 200MP high performance acrylic adhesive on one side of a 75µm white polyester film carrier on a 175µm #94 polycoated kraft paper liner



- 127µm Membrane Switch Single Coated Spacer with 200MP Adhesive. 75µm clear polyester carrier. 94 lb lay-flat polycoated kraft paper liner.
- Clear polyester carrier brightens overlay and key pads eliminating need for floodcoat. Easy to die-cut and process. Smooth appearance on graphic overlays. Use for steel rule die-cutting and kiss cutting. Use to protect leads, hold domes in place or for building custom spacers.
- Excellent moisture and solvent resistance. Excellent temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Use for selective die-cutting.

Product ID	Part Number	Product Name	MOQ	OU
7100040301	xxx	3M™ Membrane Switch Spacer 7995MP, Transparent, 610 mm x 914 mm, 0.13 mm	1	Case
7100039416	xxx	3M™ Membrane Switch Spacer 7995MP, Transparent, 700 mm x 1000 mm, 0.13 mm	1	Case

3M™ Membrane Switch Spacer 7997MP

3M™ Membrane Switch Spacer Single Coated 7997MP is a 50µm 200MP high performance acrylic adhesive on one side of a 127µm white polyester film carrier on a 175µm #94 polycoated kraft paper liner



- 175µm Membrane Switch Single Coated Spacer with 200MP Adhesive. 125µm clear polyester carrier. 94 lb lay-flat polycoated kraft paper liner.
- Clear polyester carrier brightens overlay and key pads eliminating need for floodcoat. Easy to die-cut and process. Smooth appearance on graphic overlays. Use for steel rule die-cutting and kiss cutting. Use to protect leads, hold domes in place or for building custom spacers.
- Excellent moisture and solvent resistance. Excellent temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Use for selective die-cutting.

Product ID	Part Number	Product Name	MOQ	OU
7100040289	xxx	3M™ Membrane Switch Spacer 7997MP, Transparent, 610 mm x 914 mm, 0.18 mm	1	Case

Double Sided Tapes

3M™ Double Coated Tape 9495MP

3M™ Double Coated Tape 9495MP provides high initial adhesion and good holding power on a variety of substrates. The thin, polyester film carrier offers dimensional stability and improved handling during slitting and die cutting.



- Adhesive 200MP provides exceptional temperature and chemical resistance for use in tough application environments
- Thin .013 mm clear polyester (PET) film carrier adds dimensional stability for improved handling
- Withstands high humidity conditions with minimal cockling or wrinkling

Product ID	Part Number	Product Name	MOQ	OU
7000048856	9495686	3M™ Double Coated Tape 9495MP, Transparent, 686 mm x 165 m, 0.14 mm	1	Roll

3M™ Adhesive Transfer Tape Double Lined 8132LE

3M™ Adhesive Transfer Tape 8132LE Ou is a double-lined version of 3M™ Adhesive Transfer Tape 9471LE. Featuring 3M™ 300LSE acrylic adhesive, this tape has a long and proven history of reliably bonding a wide variety of similar and dissimilar materials such as metals, most plastics, glass, papers and painted surfaces.



- 50µm 300LSE Adhesive Transfer Tape with double liners. Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- Doubled lined version of 3M™ Adhesive Transfer Tape 9471LE
- High adhesion to metals and high surface energy materials and lightly oiled metals with , making it suitable for bonding dissimilar substrates. Good resistance to industrial chemicals, consumer chemicals, moisture and humidity

Product ID	Part Number	Product Name	MOQ	OU
7100089374	xxx	3M™ Adhesive Transfer Tape Double Lined 8132LE, Transparent, 610 mm x 914 mm, 0.06 mm	1	Case

3M™ Adhesive Transfer Tape Double Lined 8153LE

3M™ Adhesive Transfer Tape Double Lined 8153LE to bond high and low surface energy plastics, powder coated paints, and lightly oily metals. Our double lined adhesive transfer tape is ideal for use on electronic devices. It has excellent shear properties.



- 90µm 300LSE Adhesive Transfer Tape with double liners. Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- Doubled lined version of 3M™ Adhesive Transfer Tape 9453LE
- High adhesion to metals and high surface energy materials and lightly oiled metals with , making it suitable for bonding dissimilar substrates. Good resistance to industrial chemicals, consumer chemicals, moisture and humidity

Product ID	Part Number	Product Name	MOQ	OU
7100089375	xxx	3M™ Adhesive Transfer Tape Double Lined 8153LE, Transparent, 610 mm x 914 mm, 0.09 mm	1	Case
7100104781	8153LE	3M™ Adhesive Transfer Tape Double Lined 8153LE, Transparent, Configurable rolls	1	Roll

Double Sided Tapes

Bonding Tapes

3M™ Double Coated Tissue Tape 9448A

3M™ Double Coated Tissue Tape 9448A is a 0.15 mm double sided tape with a medium firm acrylic adhesive on a tissue carrier that provides dimensional stability, improved handling and ease of die-cutting and laminating. The adhesive provides excellent peel strength adhesion, with good high temperature holding power to a variety of surfaces.



- Medium-firm acrylic adhesive system featuring high initial adhesion
- Good high temperature holding power
- Nameplate bonding, plastic film lamination/bonding, splicing, and foam bonding

Product ID	Part Number	Product Name	MOQ	OU
7000038379	xxx	3M™ Double Coated Tissue Tape 9448A, White, 1200 mm x 50 m, 0.15 mm	1	Roll

3M™ Double Coated Tape 9040

3M™ Double-Coated Tape 9040 is a general-purpose double-coated tissue tape. It features a high tack, high initial adhesion rubber pressure sensitive adhesive, a tissue carrier and an easy to remove siliconised paper liner.



- General purpose, double sided tissue tape
- High tack, high initial adhesion
- Get good processing and die-cutting properties

Product ID	Part Number	Product Name	MOQ	OU
7000111533	xxx	3M™ Double Coated Tape 9040, Transparent, 19 mm x 50 m, 0.18 mm	48	Roll
7000111534	xxx	3M™ Double Coated Tape 9040, Transparent, 25 mm x 50 m, 0.18 mm	36	Roll
7000111535	xxx	3M™ Double Coated Tape 9040, Transparent, 50 mm x 50 m, 0.18 mm	16	Roll
7000041765	xxx	3M™ Double Coated Tape 9040, Transparent, 1000 mm x 50 m, 0.18 mm	1	Roll

3M™ Double Coated Tape 90080

3M™ Double Coated Tape 90080 supported non-woven fabric offers a lot of flexibility and versatility in the various applications. The 3M™ Double Coated Tape 90080 acrylic adhesive allows excellent results even on surfaces with low surface energies.



- General purpose, double sided tissue tape
- High tack, high initial adhesion
- Get good processing and die-cutting properties

Product ID	Part Number	Product Name	MOQ	OU
7000037777	xxx	3M™ Double Coated Tape 90080, Transparent, 1200 mm x 50 m	1	Roll

Double Sided Tapes

3M™ Double Coated Tissue Tape CT6348

3M™ CT-6348 Double-Sided Tissue Tape provides high initial adhesion to a variety of surfaces.

- 3,5 mil double coated tape with nonwoven carrier on a siliconized liner
- High tack level offers high immediate adhesion
- Flexible to conform to irregular surfaces




Product ID	Part Number	Product Name	MOQ	OU
7100039155	xxx	3M™ Double Coated Tissue Tape CT6348, White, 1030 mm x 50 m, 0.10 mm	3	Roll
7100039714	xxx	3M™ Double Coated Tissue Tape CT6348, White, 1030 mm x 1000 m, 0.10 mm	4	Roll
7100086291	xxx	3M™ Double Coated Tissue Tape CT6348, White, 1220 mm x 1000 m, 0.10 mm	4	Roll

3M™ Double Coated Tape 9080HL

3M™ Double Coated Tape 9080HL is a Double Coated Non-woven Tape with Polycoated Paper Liner. High tack adhesive suitable for high temperature and bonding to LSE materials.

- General purpose, double sided tissue tape
- High tack, high initial adhesion
- Pressure sensitive adhesive



Product ID	Part Number	Product Name	MOQ	OU
7000115871	xxx	3M™ Double Coated Tape 9080HL, White, 12 mm x 50 m, 0.16 mm	96	Roll
7000115873	xxx	3M™ Double Coated Tape 9080HL, White, 19 mm x 50 m, 0.16 mm	60	Roll
7000115874	xxx	3M™ Double Coated Tape 9080HL, White, 25 mm x 50 m, 0.16 mm	48	Roll
7000115875	xxx	3M™ Double Coated Tape 9080HL, White, 38 mm x 50 m, 0.16 mm	32	Roll
7000115876	xxx	3M™ Double Coated Tape 9080HL, White, 50 mm x 50 m, 0.16 mm	24	Roll
7000042435	xxx	3M™ Double Coated Tape 9080HL, White, 1200 mm x 50 m, 0.16 mm	1	Roll

3M™ Double Coated Tape 9525

3M™ Double-Coated Tape 9525 is a general-purpose double-coated tissue tape.

- General purpose, double sided tissue tape
- High tack, high initial adhesion
- Easy to remove liner



Product ID	Part Number	Product Name	MOQ	OU
7000073406	xxx	3M™ Double Coated Tape 9525, Beige, 25 mm x 25 m, 0.28 mm	9	Roll
7000073448	xxx	3M™ Double Coated Tape Y9525, Beige, 19 mm x 25 m, 0.28 mm	12	Roll
7000073407	xxx	3M™ Double Coated Tape Y9525, Beige, 50 mm x 25 m, 0.28 mm	5	Roll

Double Sided Tapes

3M™ Double Coated Polyester Tape 9731

3M™ Double Coated Tape 9731 is a high performance 140µm carrier with silicone coated inside and acrylic adhesive coated outside. Double liner of 100µm polyester film and 127µm polycoated kraft paper. High temperature and medium solvent resistance, high HSE and LSE

- 350 adhesive provides excellent solvent resistance and adhesion to low surface energy materials, Silicone adhesive bonds silicone and low surface energy plastics without primer using this pressure sensitive solution
- Silicone features strong holding power to various silicone surfaces. Acrylic has the ability to bond a variety of surfaces including low surface energy plastics, powder coatings, and oily materials.
- Achieve very high adhesion to a variety of materials



Product ID	Part Number	Product Name	MOQ	OU
7000049097	xxx	3M™ Double Coated Polyester Tape 9731, Transparent, 25 mm x 33 m, 0.14 mm	36	Roll
7000049120	xxx	3M™ Double Coated Polyester Tape 9731, Transparent, 610 mm x 33 m, 0.14 mm	1	Roll
7000001317	xxx	3M™ Double Coated Polyester Tape 9731, Transparent, 1219 mm x 33 m, 0.14 mm	1	Roll

3M™ High / Low Tack Double Coated Tape 9415

The 9415 is a double-sided tape with differentiated adhesive: high adhesion.



Product ID	Part Number	Product Name	MOQ	OU
7000080463		3M™ High / Low Tack Double Coated Tape 9415, 12 mm x 66 m		
7000080464		3M™ High / Low Tack Double Coated Tape 9415, 19 mm x 66 m		

3M™ Removable Repositionable Tape 9416

3M™ Removable Repositionable Tape 9416 is a double coated tissue with acrylic adhesive 400 and repositionable adhesive 1000 on a #70 polycoated kraft paper liner.

- A white tissue carrier on a 38µm removable repositionable double coated tape.
- These double coated tapes feature a permanent adhesive on the face side and a removable repositionable adhesive on the back side of the tape. For repositioning or multiple openings and closings.
- A double coated tape that works on a variety of substrates or materials for temporary mounting of light weight materials such as paper, plastics, films or foams.



Product ID	Part Number	Product Name	MOQ	OU
7000049801	xxx	3M™ Removable Repositionable Tape 9416, White, 9.5 mm x 66 m, 0.05 mm	96	Roll

Double Sided Tapes

3M™ Removable Repositionable Double Coated Tape 9425

3M™ Removable Repositionable Double Coated Tape 9425 is a double coated tape with high tack acrylic adhesive 420 on one side and medium tack acrylic adhesive 1050 on the other side on a 58 lb. polycoated kraft paper liner with a UPVC carrier.

- 40µm UPVC film carrier coated with 60µm 420 adhesive on face side and 60µm 1050 adhesive on back side. Removable repositionable double coated tape on #58 PCK liner
- The UPVC film carrier provides differential stability which offers improved handling for laminating and die-cutting.
- Reposition a variety of substrates or materials with ease



Product ID	Part Number	Product Name	MOQ	OU
7000048528	xxx	3M™ Removable Repositionable Double Coated Tape 9425 , Transparent, 9 mm x 66 m, 0.13 mm	12	Roll

3M™ Removable Repositionable Double Coated Tape 9425HT

3M™ Double Coated Tape 9425HT 152µm double coated tape with high tack acrylic adhesive 420 on one side and medium tack acrylic adhesive 1050 on the other side on a 58 lb. polycoated kraft paper liner with a PET carrier.

- 1.4 mil PET carrier coated with 2.2 mil 420 adhesive on face side and 2.2 mil 1050 adhesive on back side. Removable repositionable double coated tape
- The PET film carrier provides differential stability which offers improved handling for laminating and die-cutting. High temperature applications.
- Use in high temperature applications



Product ID	Part Number	Product Name	MOQ	OU
7000029041	xxx	3M™ Removable Repositionable Double Coated Tape 9425HT, Transparent, 1219 mm x 55 m, 0.13 mm	1	Roll

3M™ Removable Repositionable Double Coated Tape 9415PC

3M™ Removable Repositionable Tape 9415PC is an acrylic adhesive 400 and 1000 on a 78 lb polycoated kraft paper liner and polyester film carrier. High tack/low tack. Medium temperature and low solvent resistance. Medium/low HSE and low LSE.

- 25µm polyester film carrier on a 50µm removable repositionable double coated tape
- Work with lightweight materials such as paper, plastics, films or foams
- These double coated tapes feature a permanent adhesive on the face side and a removable repositionable adhesive on the back side of the tape. For repositioning or multiple openings and closings.



Product ID	Part Number	Product Name	MOQ	OU
7000048707	xxx	3M™ Removable Repositionable Double Coated Tape 9415PC, Transparent, 19 mm x 66 m, 0.05 mm	48	Roll
7000048706	xxx	3M™ Removable Repositionable Double Coated Tape 9415PC, Transparent, 25 mm x 66 m, 0.05 mm	36	Roll
7000001226	xxx	3M™ Removable Repositionable Double Coated Tape 9415PC, Transparent, 1219 mm x 66 m, 0.05 mm	1	Roll
7000048708		3M™ Removable Repositionable Tape 9415PC, Clear, 12.7 mm x 66 m, 0.05 mm		
7100217373		3M™ Removable Repositionable Tape 9415PC, Clear, 210 mm x 295 m, 0.05 mm, Restricted GTML		
7000048835		3M™ Removable Repositionable Tape 9415PC, Clear, 610 mm x 66 m, 0.051 mm		

Double Sided Tapes

3M™ Laminating Adhesive 932FL

3M™ Laminating Adhesive 932FL features a weather- and chemical-resistant acrylic adhesive formulated for smooth and HSE surfaces. This 2 mil adhesive is applied to a clear 3 mil polyester (PET) liner that adds strength and allows for fast, efficient visual surface inspection before removal. A 58-lb. PCK secondary liner provides moisture stability even in high humidity.



- Durable double-lined adhesive ideal for graphic overlays
- 2 mil (0.051 mm) utility acrylic adhesive is formulated for smooth and HSE surfaces
- Clear 3 mil PET film liner resists breakage, allows for quick surface inspection before removal

Product ID	Part Number	Product Name	MOQ	OU
7100131817	xxx	3M™ Laminating Adhesive 932FL, Transparent, 110.8 mm x 600 m	1	Roll
7100117487	xxx	3M™ Laminating Adhesive 932FL, Transparent, 111 mm x 300 m	36	Roll
7100132669	xxx	3M™ Laminating Adhesive 932FL, Transparent, 521 mm x 600 m	2	Roll
7100104798	xxx	3M™ Laminating Adhesive 932FL, Transparent, Configurable rolls	1	Roll

3M™ Adhesive Transfer Tape 9502

3M™ Adhesive Transfer Tape 9502 is a 220 industrial acrylic adhesive with 107µm #58 polycoated kraft liner.

- 50µm adhesive transfer tape with acrylic adhesive on a polycoated kraft paper liner. Excellent shear strength, temperature resistance and chemical resistance.
- Economical graphic attachment and general industrial joining. Easy to die-cut and process.
- Good moisture and solvent resistance. Good high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cuttable.



Product ID	Part Number	Product Name	MOQ	OU
7100144543	95021524N	3M™ Adhesive Transfer Tape 9502, Transparent, 1524 mm x 165 m, 0.13 mm	2	Roll

3M™ Adhesive Transfer Tape 9505

3M™ Adhesive Transfer Tape 9505 features 3M™ Industrial Acrylic Adhesive 220, which provides a good bond to HSE materials. This 5.0 mil adhesive is applied to a 4.2 mil polycoated kraft (PCK) paper liner, which protects it until it is ready to be bonded to the substrate.

- 0.13 mm nominal 220 adhesive offers good sheer strength
- Thicker adhesives improve wet-out and adhesion on textured surfaces
- Good peel adhesion to HSE (high surface energy) materials



Product ID	Part Number	Product Name	MOQ	OU
7000049244	xxx	3M™ Adhesive Transfer Tape 9505, Transparent, 120 mm x 165 m, 0.12 mm	1	Roll
7100144540	xxx	3M™ Adhesive Transfer Tape 9505, Transparent, 500 mm x 165 m, 0.12 mm	3	Roll
7100144444	xxx	3M™ Adhesive Transfer Tape 9505, Transparent, 1220 mm x 165 m, 0.12 mm	2	Roll
7100185374	xxx	3M™ Adhesive Transfer Tape 9505, Transparent, Jumbo 1540 mm width, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Adhesive Transfer Tape Double Lined 9552

3M™ Adhesive Transfer Tape Double Lined 9552 is a 50µm 220 industrial acrylic adhesive with double liner of 107µm # 58 polycoated kraft paper.



- 50µm double lined version of 9502 on two polycoated kraft paper liners. Excellent shear strength, temperature resistance and chemical resistance.
- Economical graphic attachment and general industrial joining. Easy to die-cut and process.
- Good moisture and solvent resistance. Good high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Allows for selective die-cutting.

Product ID	Part Number	Product Name	MOQ	OU
7100148836	9552700N	3M™ Adhesive Transfer Tape Double Lined 9552, Tan, 700 mm x 1000 mm, 0.06 mm	4	Case

3M™ Adhesive Transfer Tape Double Lined 9553

3M™ Double Coated Tape Double Lined 9553 is a 115µm 220 industrial acrylic adhesive with double liner of 107µm #58 polycoated kraft paper.



- 115µm double coated version of 9555 on two polycoated kraft paper liners. Excellent shear strength, temperature resistance and chemical resistance.
- Economical graphic attachment and general industrial joining. Easy to die-cut and process.
- Good moisture and solvent resistance. Good high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Allows for selective die-cutting.

Product ID	Part Number	Product Name	MOQ	OU
7100071653	xxx	3M™ Adhesive Transfer Tape Double Lined 9553, Tranparent, 590 mm x 600 m	4	Roll
7100074607	xxx	3M™ Adhesive Transfer Tape Double Lined 9553, Transparent, 670 mm x 600 m	4	Roll
7100083617	xxx	3M™ Adhesive Transfer Tape Double Lined 9553, Transparent, 1220 mm x 330 m,	1	Roll

3M™ Adhesive Transfer Tape Double Lined 9555

3M™ Adhesive Transfer Tape Double Lined 9555 is a 127µm 220 industrial acrylic adhesive with double liner of 107µm #58 polycoated kraft paper.



- 127µm double lined version of 9505 on two polycoated kraft paper liners. Excellent shear strength, temperature resistance and chemical resistance.
- Economical graphic attachment and general industrial joining. Easy to die-cut and process.
- Good moisture and solvent resistance. Good high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cuttable. Allows for selective die-cutting.

Product ID	Part Number	Product Name	MOQ	OU
7100148868	xxx	3M™ Adhesive Transfer Tape Double Lined 9555, Tan, 700 mm x 1000 mm, 0.12 mm	3	Case

Double Sided Tapes

3M™ Adhesive Transfer Tape 966

3M™ Adhesive Transfer Tape 966 leverages the power of 3M™ High Temperature Acrylic Adhesive 100 to produce an excellent high temperature, high strength and chemical resistant bond suitable to the demands of aerospace, automotive and electronics markets. It provides low outgassing properties necessary to deliver optimal performance in demanding applications.



- Transparent, double sided, 50µm adhesive transfer tape offers a thin profile combined with our high temperature acrylic adhesive for a long-lasting bond
- Get excellent solvent and UV resistance with 3M™ Adhesive Transfer Tape 966. Our tape has a high peel strength compared to other acrylic adhesives and works well as a high temperature attachment. Ideal for the aerospace and electronics industries. Low outgassing properties benefit aerospace, automotive and electronics industries
- Use 3M™ Adhesive Transfer Tape 966 as the perfect tool within the aerospace and electronics industries, with its high peel strength compared to other acrylic adhesives and ability to work well as a high temperature attachment. Our tape gives excellent solvent and UV resistance. It's a high temperature acrylic adhesive with densified kraft paper liner that can reduce edge burr in hard tool processing of metal plates. It can also be used for flex circuit attachment.

Product ID	Part Number	Product Name	MOQ	OU
7100096671	xxx	3M™ Adhesive Transfer Tape 966, Transparent, 134 mm x 420 m, 0.06 mm	2	Roll
7100096701	xxx	3M™ Adhesive Transfer Tape 966, Transparent, 152 mm x 420 m, 0.06 mm	2	Roll
7100096670	xxx	3M™ Adhesive Transfer Tape 966, Transparent, 244 mm x 420 m, 0.06 mm	1	Roll
7000048580	xxx	3M™ Adhesive Transfer Tape 966, Transparent, 305 mm x 55 m, 0.06 mm	4	Roll

3M™ Ultra High Temperature Double Coated Tape 9077

3M™ Ultra High Temperature Double Coated Tape 9077 is a 2.0 mil clear double-coated adhesive tape designed for continued adhesion in high-temperature environments up to 500°F/260°C. It features a 2 mil 3M™ Ultra High Temperature Acrylic Adhesive 100HT, excellent for use in FPC attachment and for HSE metals. A 3.6 mil heat-resistant non-woven liner adds stability for die-cutting and converting.



- High temperature adhesive and release liner survives short term exposure to 500°F/260°C for lead-free solder reflow
- Maintains high adhesion strength in high temperatures, excellent for heat-intensive processing
- Ideal for flexible printed circuit (FPC) attachments and HSE metals

Product ID	Part Number	Product Name	MOQ	OU
7000091410	xxx	3M™ Ultra High Temperature Double Coated Tape 9077, Transparent, 500 mm x 100 m, 0.05 mm	1	Roll

Double Sided Tapes

3M™ Adhesive Transfer Tape 927

3M™ Adhesive Transfer Tape 927 is a 300 high strength acrylic adhesive with 50µm, #60 densified kraft paper liner.



- 50µm adhesive transfer tape. #60 densified kraft paper liner. For a wide variety of materials. 300 high strength acrylic adhesive. Meets US government specification MIL-P-19834B, Amendment 1.
- Used as a general purpose transfer tape for a variety of high tack, thin applications. Ideal for a wide variety of similar and dissimilar materials where an aggressive adhesive with high initial adhesion is desired. Splicing of film, foils, fabrics. Laminating foams, photos, fabrics, metal or plastic nameplates.
- Use for situations needing excellent UV and chemical resistance – ideal for high tack, thin applications

Product ID	Part Number	Product Name	MOQ	OU
7000116585	xxx	3M™ Adhesive Transfer Tape 927, Transparent, 1200 mm x 55 m, 0.05 mm	1	Roll
7000116588	xxx	3M™ Adhesive Transfer Tape 927, Transparent, 1200 mm x 110 m, 0.05 mm	1	Roll
7000116670	xxx	3M™ Adhesive Transfer Tape 927, Transparent, 1200 mm x 250 m, 0.05 mm	1	Roll

Double Sided Tapes

3M™ Adhesive Transfer Tape 950

3M™ Adhesive Transfer Tape 950 is a 300 high strength acrylic adhesive on a 90µm #60 densified kraft paper liner.



- 130µm adhesive transfer tape #60 densified kraft paper liner. For a wide variety of materials. 300 high strength acrylic adhesive. UL approved. Meets US government specification MIL-P-19834B, Amendment 1.
- Good UV resistance. Good chemical resistance. Ideal for high surface energy (HSE) and low surface energy (LSE) materials.
- Use for a variety of high tack, thin applications where an aggressive adhesive with high initial adhesion is needed

Product ID	Part Number	Product Name	MOQ	OU
7000116560	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 9 mm x 55 m, 0.13 mm	96	Roll
7000116554	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 12 mm x 10 m, 0.13 mm	48	Roll
7000116556	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 12 mm x 55 m, 0.13 mm	72	Roll
7000116655	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 12 mm x 55 m, 0.13 mm	18	Roll
7000116650	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 15 mm x 55 m, 0.13 mm	60	Roll
7000116616	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 19 m x 55 m, 0.127 mm, CoA, Restricted	48	Roll
7000116555	9501955	3M™ Adhesive Transfer Tape 950, Transparent, 19 mm x 55 m, 0.13 mm	48	Roll
7000116657	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 19 mm x 55 m, 0.13 mm	12	Roll
7000116681	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 19 mm x 55 m, 0.13 mm	48	Roll
7000116559	95025	3M™ Adhesive Transfer Tape 950, Transparent, 25 mm x 55 m, 0.13 mm	36	Roll
7000116656	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 25 mm x 55 m, 0.13 mm	9	Roll
7000116669	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 25 mm x 55 m, 0.13 mm	36	Roll
7000116678	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 25 mm x 55 m, 0.13 mm	72	Roll
7000116649	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 30 mm x 55 m, 0.13 mm	28	Roll
7000116651	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 38 mm x 55 m, 0.13 mm	48	Roll
7000116664	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 40 mm x 55 m, 0.13 mm	20	Roll
7000116558	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 50 mm x 55 m, 0.13 mm	20	Roll
7000116665	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 50 mm x 55 m, 0.13 mm	20	Roll
7000116666	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 65 mm x 55 m, 0.13 mm	24	Roll
7000116648	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 100 mm x 55 m, 0.13 mm	12	Roll
7000116667	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 100 mm x 55 m, 0.13 mm, ABS5768	12	Roll
7000116636	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 383 mm x 55 m, 0.13 mm	3	Roll
7000116615	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 400 mm x 55 m, 0.13 mm	3	Roll
7000042433	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 500 mm x 55 m, 0.13 mm	1	Roll
7000116561	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 1000 mm x 55 m, 0.13 mm	1	Roll
7000116587	9501200	3M™ Adhesive Transfer Tape 950, Transparent, 1200 mm x 55 m, 0.13 mm	1	Roll
7000001189	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 1220 mm x 55 m, 0.13 mm	1	Roll
7100071755	xxx	3M™ Adhesive Transfer Tape 950, Transparent, 1500 mm x 55 m, 0.13 mm	1	Roll

Double Sided Tapes

3M™ Adhesive Transfer Tape 950EK

3M™ Adhesive Transfer Tape 950EK is a 300 high strength acrylic adhesive on a 152µm #78 extensible kraft paper liner.



- 130µm adhesive transfer tape #78 extensible kraft paper liner. For a wide variety of materials. 300 high strength acrylic adhesive.
- Good UV resistance. Good chemical resistance. Ideal for high surface energy (HSE) and low surface energy (LSE) materials.
- Used as a general purpose transfer tape for a variety of high tack, thin applications. Ideal for a wide variety of similar and dissimilar materials where an aggressive adhesive with high initial adhesion is desired. Splicing of film, foils, fabrics. Laminating foams, photos, fabrics, metal or plastic nameplates.

Product ID	Part Number	Product Name	MOQ	OU
7000049198	xxx	3M™ Adhesive Transfer Tape 950EK, Transparent, 19 mm x 55 m, 0.13 mm	48	Roll
7000048838	xxx	3M™ Adhesive Transfer Tape 950EK, Transparent, 1200 mm x 110 m, 0.13 mm	1	Roll

3M™ Adhesive Transfer Tape 9471

3M™ Adhesive Transfer Tape 9471 is a 50µm 300 high strength acrylic adhesive on a 90µm #60 densified kraft paper liner.



- 50µm high tack adhesive transfer tape for rotary die-cutting processes. #60 densified kraft paper liner. For a wide variety of surfaces.
- Good UV resistance. Good chemical resistance. Ideal for high surface energy (HSE) and low surface energy (LSE) materials.
- High and low surface energy plastics, textured plastics, foams, fabrics, and coated papers. For smooth LSE plastics.

Product ID	Part Number	Product Name	MOQ	OU
7000115647	xxx	3M™ Adhesive Transfer Tape 9471, Transparent, 610 mm x 55 m, 0.05 mm	1	Roll

3M™ Adhesive Transfer Tape 9472

3M™ Adhesive Transfer Tape 9472 is a 130µm 300 high strength acrylic adhesive on a 90µm #60 densified kraft paper liner.



- 130µm high tack adhesive transfer tape for rotary die-cutting processes. 60 lb densified kraft paper liner. For a wide variety of surfaces.
- Good UV resistance. Good chemical resistance. Ideal for high surface energy (HSE) and low surface energy (LSE) materials.
- High and low surface energy plastics, textured plastics, foams, fabrics, and coated papers. For textured surfaces.

Product ID	Part Number	Product Name	MOQ	OU
7000115660	xxx	3M™ Adhesive Transfer Tape 9472, Transparent, 610 mm x 55 m, 0.13 mm	1	Roll
7000115666	xxx	3M™ Adhesive Transfer Tape 9472, Transparent, 1220 m x 55 m, 0.05 mm	1	Roll
7100104799	9472CONFIG	3M™ Adhesive Transfer Tape 9472, Transparent, Jumbo 1540 mm width, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Adhesive Transfer Tape 9482PC

3M™ Adhesive Transfer Tape 9482PC is a 350 high performance acrylic adhesive on a 107µm #62 polycoated kraft paper liner

- 50µm adhesive transfer tape. #62 polycoated kraft paper liner for steel rule die-cutting. Meets UL specification. 350 High Performance Acrylic Adhesive.
- High tack and shear strength. Excellent temperature and solvent resistance. Excellent adhesion to plastics and foams. Used for joining materials that are relatively smooth, thin and have low residual stress.
- Contains a fiber reinforced adhesive which is important for roll stability in narrow widths. Designed for temperature exposure to 232 degree Celcius for short periods of time. Ideal for bonding a wide variety of similar and dissimilar materials.



Product ID	Part Number	Product Name	MOQ	OU
7000115671	xxx	3M™ Adhesive Transfer Tape 9482PC, Transparent, 1000 mm x 55 m, 0.05 mm	2	Roll
7000115642	xxx	3M™ Adhesive Transfer Tape 9482PC, Transparent, 1200 mm x 110 m, 0.05 mm	1	Roll
7100104800	9482PCCONFIG	3M™ Adhesive Transfer Tape 9482PC, Transparent, Configurable	1	Roll

3M™ Adhesive Transfer Tape 9485PC

3M™ Adhesive Transfer Tape 9485PC is a 350 high performance acrylic adhesive on a 107µm #62 polycoated kraft paper liner

- 127µm adhesive transfer tape. #62 polycoated kraft paper liner for steel rule die-cutting. Meets UL specification. 350 High Performance Acrylic Adhesive.
- High tack and shear strength. Excellent temperature and solvent resistance. Excellent adhesion to plastics and foams. Used for joining materials that are relatively smooth, thin and have low residual stress.
- Contains a fiber reinforced adhesive which is important for roll stability in narrow widths. Designed for temperature exposure to 232 degree Celsius for short periods of time. Ideal for bonding a wide variety of similar and dissimilar materials.



Product ID	Part Number	Product Name	MOQ	OU
7000115673	xxx	3M™ Adhesive Transfer Tape 9485PC, Transparent, 19 mm x 55 m, 0.13 mm	12	Roll
7000115640	xxx	3M™ Adhesive Transfer Tape 9485PC, Transparent, 508 mm x 55 m, 0.13 mm	2	Roll
7000115525	xxx	3M™ Adhesive Transfer Tape 9485PC, Transparent, 610 mm x 55 m, 0.13 mm	1	Roll
7000115680	xxx	3M™ Adhesive Transfer Tape 9485PC, Transparent, 1200 m x 250 m, 0.13 mm	1	Roll
7000042346	xxx	3M™ Adhesive Transfer Tape 9485PC, Transparent, 1200 mm x 55 m, 0.13 mm	1	Roll
7000115669	xxx	3M™ Adhesive Transfer Tape 9485PC, Transparent, 1200 mm x 165 m, 0.13 mm	1	Roll
7100104801	9485PCCONFIG	3M™ Adhesive Transfer Tape 9485PC, Transparent, Jumbo 1220 mm width, 0.13 mm, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Adhesive Transfer Tape 9605

3M™ Adhesive Transfer Tape 9605 is the standard transfer adhesive from 3M. This transparent adhesive film has a high degree of immediate stickiness and shear strength.

- 50µm acrylic adhesive transfer tape on white polycoated paperliner
- Medium-firm acrylic adhesive system. It features an excellent balance of high initial adhesion (quick stick) and good shear holding power
- Bond strength generally increases somewhat with natural ageing



Product ID	Part Number	Product Name	MOQ	OU
7000116623	xxx	3M™ Adhesive Transfer Tape 9605, Transparent, 19 mm x 50 m, 0.05 mm	48	Roll
7000042432	xxx	3M™ Adhesive Transfer Tape 9605, Transparent, 1200 mm x 50 m, 0.05 mm	1	Roll

3M™ Adhesive Transfer Tape 9626

3M™ Adhesive Transfer Tape 9626 50µm 360 high performance quick stick acrylic adhesive on a 80µm glassine paper liner

- 50µm adhesive transfer tape on a 80µm glassine paper liner. Quick stick adhesion. Immediate bond.
- Join materials immediately with quick stick adhesion
- Adhesive tape has exceptional adhesion properties and bonds well to high and low surface energy plastics HSE LSE such as HDPE, PP, ABS, polycarbonate, PMMA; powder coated paints. Has excellent quick stick properties.



Product ID	Part Number	Product Name	MOQ	OU
7000001482	xxx	3M™ Adhesive Transfer Tape 9626, Transparent, 1372 mm x 55 m, 0.13 mm	1	Roll
7100012272	9626CONFIG	3M™ Adhesive Transfer Tape 9626, Transparent, Configurable rolls	1	Roll

3M™ Adhesive Transfer Tape 9627

3M™ Adhesive Transfer Tape 9627 127µm 360 high performance quick stick acrylic adhesive on a 80µm glassine paper liner

- 127µm adhesive transfer tape on a 80µm glassine paper liner. Quick stick adhesion. Immediate bond.
- Join materials immediately with quick stick adhesion
- Adhesive tape has exceptional adhesion properties and bonds well to high and low surface energy plastics HSE LSE such as HDPE, PP, ABS, polycarbonate, PMMA; powder coated paints. Has excellent quick stick properties.



Product ID	Part Number	Product Name	MOQ	OU
7000049547	9627686	3M™ Adhesive Transfer Tape 9627, Transparent, 686 mm x 55 m, 0.13 mm	1	Roll
7100012241	9627CONFIG	3M™ Adhesive Transfer Tape 9627, Transparent, Configurable rolls	1	Roll

Double Sided Tapes

3M™ Double Coated Tape 9628FL

3M™ Double Coated Polyester Tape 9628FL 50µm 360 high performance quick stick acrylic adhesive double coat with a clear polyester (PET) carrier on a 50µm PET film liner

- 50µm double coated tape on a PET polyester carrier with a PET polyester film liner.
- Join materials immediately with quick stick adhesion
- Double coated tape has exceptional adhesion properties and bonds well to high and low surface energy plastics HSE LSE such as HDPE, PP, ABS, polycarbonate, PMMA; powder coated paints. Has excellent quick stick properties.



Product ID	Part Number	Product Name	MOQ	OU
7100051378	xxx	3M™ Double Coated Tape 9628FL, Clear, 1372 mm x 329 m, 0.05 mm	1	Roll
7000001485	xxx	3M™ Double Coated Tape 9628FL, Clear, 5102 mm x 55 m, 0.051 mm	1	Roll

3M™ Double Coated Tape 9629PC

3M™ Coated Polyester Tape 9629PC 100µm 360 high performance quick stick acrylic adhesive double coat with a clear polyester (PET) carrier on a 107µm PCK #58 paper liner

- 100µm double coated tape on a PET polyester carrier with a #58 polycoated kraft PCK paper liner.
- Join materials immediately with quick stick adhesion
- Double coated tape has exceptional adhesion properties and bonds well to high and low surface energy plastics HSE LSE such as HDPE, PP, ABS, polycarbonate, PMMA; powder coated paints. Has excellent quick stick properties.



Product ID	Part Number	Product Name	MOQ	OU
7100263025	96291372W	3M™ Double Coated Tape 9629PC, 1372 mm x 55 m, 0.1 mm	1	Roll
7000115779	xxx	3M™ Double Coated Tape 9629PC, Transparent, 19 mm x 55 m, 0.1 mm	48	Roll

3M™ High Performance Double Coated Tape 9084

3M™ High Performance Double Coated Tape 9084 is a 10.2 mil double coated tape with Adhesive 375, PVC carrier 1.5 mils, tape is white in color.

- 100µm, thick double coated tape with tissue carrier. Hand tearable, conformable and easy handling. Paper liner.
- Thin, double coated film tape with acrylic adhesive. High tack, immediate bond, quick stick, high adhesion and good initial adhesion to a wide variety of materials or surfaces. High strength. Solvent resistant tape.
- Tear easily by hand and handles with ease due to its conformability



Product ID	Part Number	Product Name	MOQ	OU
7000071748	xxx	3M™ High Performance Double Coated Tape 9084, Creme, 12 mm x 50 m, 0.1 mm	100	Roll
7000071750	xxx	3M™ High Performance Double Coated Tape 9084, Creme, 19 mm x 50 m, 0.1 mm	60	Roll
7000071751	xxx	3M™ High Performance Double Coated Tape 9084, Creme, 25 mm x 50 m, 0.1 mm	50	Roll
7000071753	908450	3M™ High Performance Double Coated Tape 9084, Creme, 50 mm x 50 m, 0.1 mm	25	Roll
7000033073	xxx	3M™ High Performance Double Coated Tape 9084, Creme, 1550 mm x 50 m, 0.1 mm	1	Roll

Double Sided Tapes

3M™ Double Coated Paper Tape 9086

3M™ High Performance Double Coated Tape 9086 is a 190µm Double coated tape with Adhesive 375, tissue carrier, translucent in color on a white paper liner with black 3M logo



- 190µm, thick double coated tape with tissue carrier. Hand tearable, conformable and easy handling. Paper liner.
- Thick, double coated film tape with acrylic adhesive. High tack, immediate bond, quick stick, high adhesion and good initial adhesion to a wide variety of materials or surfaces. High strength. Solvent resistant tape. High peel and shear strength, and resi
- Tear easily by hand and handles with ease due to its conformability

Product ID	Part Number	Product Name	MOQ	OU
7000033072	xxx	3M™ Double Coated Paper Tape 9086, Transparent, 1550 mm x 50 m, 0.19 mm	1	Roll
7000071739	xxx	3M™ Double Coated Paper Tape 9086, White, 9 mm x 50 m, 0.19 mm	156	Roll
7000071740	xxx	3M™ Double Coated Paper Tape 9086, White, 12 mm x 50 m, 0.19 mm	120	Roll
7000071741	xxx	3M™ Double Coated Paper Tape 9086, White, 15 mm x 50 m, 0.19 mm	96	Roll
7000071742	xxx	3M™ Double Coated Paper Tape 9086, White, 19 mm x 50 m, 0.19 mm	72	Roll
7000071743	xxx	3M™ Double Coated Paper Tape 9086, White, 25 mm x 50 m, 0.19 mm	54	Roll
7000071744	908650	3M™ Double Coated Paper Tape 9086, White, 50 mm x 50 m, 0.19 mm	30	Roll
7000071745	90861000	3M™ Double Coated Paper Tape 9086, White, 1000 mm x 50 m, 0.19 mm	1	Roll

3M™ Double Coated PVC Tape 9087

3M™ High Performance Double Coated Tape 9087 is a 260µm double coated tape with Adhesive 375, PVC carrier 38µm, tape is white in color on a white paper liner with green 3M logo



- 260µm thick double coated tape with a PVC, polyvinyl chloride carrier. This tape with adhesive on both sides of a thick PVC carrier for easy handling. Paper liner.
- Thick, double coated film tape with acrylic adhesive. High tack, immediate bond, quick stick, high adhesion and good initial adhesion to a wide variety of materials or surfaces. High strength. Solvent resistant tape.
- Bond smooth, rough or textured surfaces with high tack, immediate bond, quick stick and high adhesion

Product ID	Part Number	Product Name	MOQ	OU
7000071737	908738	3M™ Double Coated PVC Tape 9087, White, 8 mm x 50 m, 0.26 mm	24	Roll
7000071732	xxx	3M™ Double Coated PVC Tape 9087, White, 9 mm x 50 m, 0.26 mm	104	Roll
7000071733	xxx	3M™ Double Coated PVC Tape 9087, White, 12 mm x 50 m, 0.26 mm	80	Roll
7000071735	xxx	3M™ Double Coated PVC Tape 9087, White, 19 mm x 50 m, 0.26 mm	48	Roll
7000071736	xxx	3M™ Double Coated PVC Tape 9087, White, 25 mm x 50 m, 0.26 mm	36	Roll
7000071738	xxx	3M™ Double Coated PVC Tape 9087, White, 50 mm x 50 m, 0.26 mm	20	Roll
700006772	xxx	3M™ Double Coated PVC Tape 9087, White, 1000 mm x 50 m, 0.26 mm	1	Roll

Double Sided Tapes

3M™ Double Coated Tape 415

3M™ Double Coated Tape 415 is a 100µm double coated polyester with acrylic adhesive 400 on a 100µm #60 densified kraft paper liner

- 100µm double coated tape on PET polyester carrier with #60 densified kraft DK paper liner
- Excellent UV resistance. Good adhesion to a wide variety of materials such as HSE high surface energy, LSE low surface energy and metals. Good temperature and humidity resistance.
- Stick materials with HSE high surface energy, LSE low surface energy and metals



Product ID	Part Number	Product Name	MOQ	OU
7000123279	xxx	3M™ Double Coated Tape 415, Transparent, 12.7 mm x 33 m, 0.1 mm	72	Roll
7000042757	xxx	3M™ Double Coated Tape 415, Transparent, 19 mm x 33 m, 0.1 mm	48	Roll
7000042758	xxx	3M™ Double Coated Tape 415, Transparent, 25 mm x 33 m, 0.1 mm	36	Roll
7100037924	xxx	3M™ Double Coated Tape 415, Transparent, 35 mm x 33 m, 0.1 mm	24	Roll
7000048399	xxx	3M™ Double Coated Tape 415, Transparent, 51 mm x 33 m, 0.1 mm	24	Roll
7100037923	xxx	3M™ Double Coated Tape 415, Transparent, 69 mm x 66 m, 0.1 mm	12	Roll
7000123281	xxx	3M™ Double Coated Tape 415, Transparent, 305 mm x 33 m, 0.1 mm	4	Roll

3M™ Adhesive Transfer Tape 465

3M™ Adhesive Transfer Tape 465 is a 50µm high tack acrylic adhesive 400 with 90µm #60 densified kraft paper liner.

- 50µm adhesive transfer tape with easy liner release for manual or hand applications. Fibred adhesive transfer tape.
- Apply to printing applications such as splicing, core starting, flexo and laminating
- High tack, excellent adhesion to most paper stocks. Good low temperature performance and peel strength on many surfaces.



Product ID	Part Number	Product Name	MOQ	OU
7000116596	xxx	3M™ Adhesive Transfer Tape 465, Transparent, 9 mm x 55 m, 0.05 mm	96	Roll
7000042430	xxx	3M™ Adhesive Transfer Tape 465, Transparent, 12 mm x 55 m, 0.05 mm	72	Roll
7000116597	xxx	3M™ Adhesive Transfer Tape 465, Transparent, 19 mm x 55 m, 0.05 mm	48	Roll
7000116594	xxx	3M™ Adhesive Transfer Tape 465, Transparent, 25 mm x 55 m, 0.05 mm	36	Roll
7000116602	xxx	3M™ Adhesive Transfer Tape 465, Transparent, 30 mm x 55 m, 0.05 mm	28	Roll
7000116595	xxx	3M™ Adhesive Transfer Tape 465, Transparent, 38 mm x 55 m, 0.05 mm	24	Roll
7000042429	xxx	3M™ Adhesive Transfer Tape 465, Transparent, 50 mm x 55 m, 0.05 mm	20	Roll

Double Sided Tapes

3M™ Double Coated Polyethylene Tape 9576

Our 3M™ Double Coated Tape 9576 is made from 4.0 mil double coated clear polypropylene with acrylic adhesive 400 on a 4 mil 27.2 kilo tan densified kraft paper liner.



- 4 mil clear double coated tape on a tan 60 DK liner
- High-tack, double-coated tape with proven performance for paper web splicing and general purpose bonding
- Excellent flying splice and core starting characteristics. Wet grab. Process speeds in excess of 609.6 metres per minute

Product ID	Part Number	Product Name	MOQ	OU
7000048861	xxx	3M™ Double Coated Polyethylene Tape 9576, Transparent, 38 mm x 50 m, 0.10 mm	24	Roll
7000048748	xxx	3M™ Double Coated Polyethylene Tape 9576, Transparent, 50 mm x 50 m, 0.102 mm	24	Roll

3M™ Adhesive Transfer Tape Y9417

3M 9417 is permanent adhesive in the sense that it does not degrade when sandwiched between two impermeable surfaces in normal use. 9417 is well suited for bonding together a wide variety of similar and dissimilar materials such as metals, glass, wood, papers, paints, and many plastics.



- High speed flying splices on most grades of paper such as newsprint, clay coated, corrugated stocks.
- Splicing of foils, films and fabrics. Attaching labels or instructions to bottles. Laminating adhesive for foams, photos. Attaching metal or plastic nameplates. Core starting.
- Mounting promotional items posters, etc. Mounting rubber or photopolymer printing plates. Reclosable plastic bags. Miscellaneous joining and holding where high initial adhesion, easy liner release and a thin, long ageing bond is required.

Product ID	Part Number	Product Name	MOQ	OU
7000116583	xxx	3M™ Adhesive Transfer Tape Y9417, Transparent, 19 mm x 55 m, 0.05 mm	48	Roll
7000116581	xxx	3M™ Adhesive Transfer Tape Y9417, Transparent, 19 mm x 110 m, 0.05 mm		Each
7000116584	xxx	3M™ Adhesive Transfer Tape Y9417, Transparent, 25 mm x 55 m, 0.05 mm	108	Roll
7000116576	xxx	3M™ Adhesive Transfer Tape Y9417, Transparent, 50 mm x 100 m, 0.05 mm	60	Roll
7000116590	xxx	3M™ Adhesive Transfer Tape Y9417, Transparent, 1200 mm x 110 m, 0.05 mm	1	Roll

3M™ Double Coated Tape 9576B

Our 3M™ Double Coated Tape 9576B is made from 4.0 mil double coated black polypropylene with acrylic adhesive 400 on a 4 mil 27.2 kilo tan densified kraft paper liner.



- 4 mil clear double coated tape on a tan 60 DK liner
- High-tack, double-coated tape with proven performance for paper web splicing and general purpose bonding
- Excellent flying splice and core starting characteristics. Wet grab. Process speeds in excess of 609.6 metres per minute


Product ID	Part Number	Product Name	MOQ	OU
7000048746	xxx	3M™ Double Coated Tape 9576B, Black, 50 mm x 50 m, 0.102 mm	24	Roll

Double Sided Tapes

3M™ Double Coated Paper Tape 410M

3M™ Double Coated Paper Tape 410M is a 127µm double coated paper tape with rubber adhesive 850 on a 75µm #54 densified Kraft green plaid paper liner.

- 127µm natural rubber double coated tape for core starting, end tabbing of papers, films and foils.
- Get good initial adhesion to a variety of surfaces
- Achieve increased strength and stability when applied



Product ID	Part Number	Product Name	MOQ	OU
7000049273	xxx	3M™ Double Coated Paper Tape 410B, Natural, 19 mm x 33 m, 0.15 mm	48	Roll
7000049275	xxx	3M™ Double Coated Paper Tape 410B, Natural, 51 mm x 33 m, 0.15 mm	24	Roll
7000049274	xxx	3M™ Double Coated Paper Tape 410M, Natural, 25 mm x 33 m, 0.15 mm	36	Roll
7100007291	xxx	3M™ Double Coated Paper Tape 410M, Natural, 25 mm x 33 m, 0.15 mm	36	Roll
7000049321	xxx	3M™ Double Coated Paper Tape 410M, Natural, 38 mm x 33 m, 0.15 mm	1	Roll
7000049322	xxx	3M™ Double Coated Paper Tape 410M, Natural, 76 mm x 33 m, 0.15 mm	12	Roll
7000049327	xxx	3M™ Double Coated Paper Tape 410M, Natural, 203 mm x 33 m, 0.15 mm	4	Roll
7000049325	xxx	3M™ Double Coated Paper Tape 410M, Natural, 305 mm x 33 m, 0.15 mm	1	Roll
7000049326	xxx	3M™ Double Coated Paper Tape 410M, Natural, 381 mm x 33 m, 0.15 mm	1	Roll

3M™ Double Coated Film Tape 9589

3M™ Double Coated Film Tape 9589 is a 230µm double coated high density polyethylene with rubber adhesive 760 on a 93µm #62 densified kraft liner

- 230µm synthetic rubber double coated tape on a 62# DK liner.
- High initial adhesion with build-up over 24 hours which allows proper placement of bonded materials such as carpets. Excellent quick stick.
- Good adhesion to low surface energy substrates. For indoor and room temperature applications.



Product ID	Part Number	Product Name	MOQ	OU
7000048619	xxx	3M™ Double Coated Film Tape 9589, White, 19 mm x 33 m	48	Roll

3M™ Double Coated Paper Tape 9527

3M™ Double Coated Paper Tape 9527 is a medium-firm rubber-resin pressure sensitive adhesive system. It features an excellent balance of high initial adhesion and good holding power to a wide variety of materials.

- 130µm rubber adhesive on a poly coated liner.
- Achieve an excellent balance of high initial adhesion and good holding power
- Bond a wide variety of similar and dissimilar materials such as rubbers, metals, wood, glass, paints and plastics



Product ID	Part Number	Product Name	MOQ	OU
7000111526	xxx	3M™ Double Coated Paper Tape 9527, Creme, 19 mm x 50 m, 0.13 mm	48	Roll
7000111527	xxx	3M™ Double Coated Paper Tape 9527, Creme, 25 mm x 50 m, 0.13 mm	36	Roll
7000041764	xxx	3M™ Double Coated Paper Tape 9527, Creme, 1000 mm x 50 m, 0.13 mm	1	Roll

Double Sided Tapes

3M™ Double Coated Tape 9191

3M™ Double Coated Tape 9191, is a general-purpose double-coated tape. It features a high tack, high initial adhesion rubber pressure sensitive adhesive, a non-woven carrier and an easy to remove siliconised paper liner.

- General purpose, double sided tissue tape
- High tack, high initial adhesion
- Pressure sensitive adhesive



Product ID	Part Number	Product Name	MOQ	OU
7000096222	xxx	3M™ Double Coated Tape 9191, White, 25 mm x 25 mm, 0.26	72	Roll
7000035445	xxx	3M™ Double Coated Tape 9191, White, 50 mm x 25 m, 0.26 mm	36	Roll
7000062001	919150	3M™ Double Coated Tape 9191, White, 50 mm x 25 m, 0.26 mm, Blister	36	Roll

3M™ Carpet Tape 9195

3M™ Double Coated Tape 91915 is a general-purpose double-coated tape. It features a high tack, high initial adhesion rubber pressure sensitive adhesive, a non-woven carrier and an easy to remove siliconised paper liner.

- General purpose, double sided tissue tape
- High tack, high initial adhesion
- Pressure sensitive adhesive



Product ID	Part Number	Product Name	MOQ	OU
7000111997	xxx	3M™ Carpet Tape 9195, Yellow, 25 mm x 25 m, 0.13 mm	72	Roll
7000111987	xxx	3M™ Carpet Tape 9195, Yellow, 50 mm x 25 m, 0.13 mm	36	Roll

3M™ Adhesive Transfer Tape Extended Liner 920XL

3M™ Adhesive Transfer Tapes Extended Liner are general purpose tapes with a pressure sensitive adhesive mounted on a removable extended paper liner for easy liner starting and removal.

- Pressure sensitive adhesives ideal for bonding a variety of different materials
- Dry edge and finger lift edge liners for added user convenience
- Tack free tape roll edges for ease of use and reduced equipment maintenance



Product ID	Part Number	Product Name	MOQ	OU
7000048424	xxx	3M™ Adhesive Transfer Tape Extended Liner 920XL, Transparent, 12.7 mm x 914 m, 0.025 mm	12	Roll

Double Sided Tapes

3M™ Fingerlift Double Coated Tape 983

3M™ Fingerlift Double Coated Tape 983. Our tape has a high adhesion and good holding power with an extended liner that provides a dry edge on each side of the tape for easy removal.

- Edging of business forms, posters and point of sale advertising. The extended liner provides a dry edge on each side of the tape for easy removal.
- Easily remove with extended liner that provides a dry edge on each side of the tape
- Mounting of posters or display items.



Product ID	Part Number	Product Name	MOQ	OU
7000111521	xxx	3M™ Fingerlift Double Coated Tape 983, Off-White, 12 mm x 500 m, 0.1 mm, Fingerlift, Wider liner	12	Roll
7000111522	xxx	3M™ Fingerlift Double Coated Tape 983, Off-White, 18 mm x 500 m, 0.1 mm, Fingerlift, Wider liner	8	Roll

3M™ Low VOC Double Coated Tissue Tape 99015LVC

3M™ Low VOC Double Coated Tissue Tape 99015LVC is a 150 µ double coated tape with a tissue carrier for dimensional stability, ease of handling during lamination and excellent die-cutting. It is recommended for automotive interior bonding, trim and attachment applications to many foam, HSE and LSE substrates.

- 150µm double coated tissue tape, Low VOC and Low FOG acrylic adhesive.
- Designed to meet JAMA and VDA278 automotive standards.
- Up to 200°C short-term heat resistance and good shear strength.



Product ID	Part Number	Product Name	MOQ	OU
7100085670	xxx	3M™ Low VOC Double Coated Tissue Tape 99015LVC, Transparent, 1000 mm x 50 m, 0.15 mm	24	Roll
7100085845	xxx	3M™ Low VOC Double Coated Tissue Tape 99015LVC, Transparent, 1500 mm x 50 m	1	Roll
7100085671	xxx	3M™ Low VOC Double Coated Tissue Tape 99015LVC, Transparent, 1500 mm x 200 m, 0.15 mm	6	Roll

3M™ Low VOC Scrim Reinforced Transfer Tape 98010LVC

3M™ Low VOC Scrim Reinforced Transfer Tape 98010LVC is a 100µm acrylic adhesive transfer tape with a scrim reinforced carrier.

- 100µm adhesive transfer tape with a scrim reinforced carrier, Low VOC and Low FOG acrylic adhesive.
- Designed to meet JAMA and VDA278 automotive test methods and industry standards on volatile organic compounds.
- Up to 135°C short-term heat resistance and good shear strength.



Product ID	Part Number	Product Name	MOQ	OU
7100085634	xxx	3M™ Low VOC Scrim Reinforced Transfer Tape 98010LVC, Transparent, 1000 mm x 50 m, 0.10 mm	96	Roll
7100085854	xxx	3M™ Low VOC Scrim Reinforced Transfer Tape 98010LVC, Transparent, 1500 mm x 50 m, 0.10 mm	1	Roll

Double Sided Tapes

3M™ Screen Printable Pressure Sensitive Adhesive SP7202

3M™ Screen Printable Pressure Sensitive Adhesive SP7202 is a liquid that can be applied through a screen printing process, then cured with 1-2 seconds under UV light to become a pressure sensitive adhesive. It allows fine bond lines greater than 0.2mm and holes as small as approximately 1mm with less waste than die cutting. The 100% solids adhesive can be printed directly on parts. When cured it is water and chemical resistant, and can be bonded immediately or covered with a liner for shipping to a different location.



- Screen-printable liquid cures under UV light to become a pressure sensitive adhesive (PSA)
- Works with conventional screen printing and UV curing equipment
- Allows printing of narrow bond lines (> 0.2mm) and holes as small as approximately 1mm

Product ID	Part Number	Product Name	MOQ	OU
7100238539	xxx	3M™ Screen Printable UV-Curing Pressure Sensitive Adhesive SP7202, Clear, 1 L	6	Bottle

3M™ Sheet and Screen Label Materials

3M™ Sheet and Screen Label Materials 7908E is our 50 micron gloss white polyester facestock with 45 micron acrylic adhesive 350 on a 170 micron polycoated kraft liner with green 3M Logo printed. It's UL recognised and CSA accepted.



- Facestocks (polyester and vinyl) and adhesives offer heat tolerance, clarity, and UV resistance
- 350 high performance acrylic adhesive for high shear strength on low surface energy (LSE) substrates
- Polycoated and film liners are suitable for efficient processing

Product ID	Part Number	Product Name	MOQ	OU
7000041363	xxx	3M™ Screenprintable Adhesive SP4533, Milky white, 3 kg	4	Canister
7100030822	xxx	3M™ Screenprintable Adhesive SP4533, Milky white, 4 kg	4	Canister
7000006835	xxx	3M™ Screenprintable Adhesive SP7555, Transparent, 1 L	6	Canister
7000080145	xxx	3M™ Screenprintable Adhesive SP7555T, Transparent, 5 L	2	Each

3M™ Adhesive Transfer Tape F9465PC

3M™ Adhesive Transfer Tape F9465PC is a specialty acrylic adhesive on a 107µm #58 polycoated kraft paper liner



- 127µm adhesive transfer tape. #58 polycoated kraft paper liner. Specialty Acrylic Adhesive
- Resist the effects of plasticiser migration in flexible vinyls
- Used as a specialty adhesive transfer tape for HSE plastics

Product ID	Part Number	Product Name	MOQ	OU
7000048829	xxx	3M™ Adhesive Transfer Tape F9465PC, Transparent, 610 mm x 55 m, 0.13 mm	1	Roll



Reclosable Fasteners

3M™ Dual Lock™ Reclosable Fasteners

Looking for a reclosable fastener with super strength, ultimate ease and durable enough to last through repeated opening and closing?

Find the product you need based on the substrate or external condition you're working with.



For Flexible and Bendable Attachments

3M™ Reclosable Fastener SJ352x and SJ357x Families offer an alternative to a wide variety of reclosable attachment methods, including zips, screws, snaps, hooks and more.



For Polypropylene & Polyethylene

3M™ Dual Lock™ Reclosable Fastener SJ354x Series are ideal for replacing screws, nails, snaps and rivets. Designed for use with plastics (acrylic, polycarbonate and ABS), powder-coated paints and low-surface energy materials (polypropylene and polyethylene). Indoor use.



For Metals and Plastics

3M™ Dual Lock™ Reclosable Fastener SJ355xCF family is perfect for replacing screws, nails, snaps and rivets. It bonds to a variety of substrates including metals, powder-coated paints and plastics such as acrylics, polycarbonate and ABS. Indoor and outdoor use.



For Translucent Materials

3M™ Dual Lock™ Reclosable Fastener SJ3560 is strong, reliable and simple to use. Great for replacing screws, nails, snaps and rivets, it bonds to a variety of substrates including metals and plastics such as acrylics, polycarbonate and ABS. Indoor and outdoor use.



For Powder Coated Paints

3M™ Dual Lock™ Reclosable Fastener SJ387x Family is also designed to replace screws, nails, snaps and rivets. It bonds to a variety of substrates including metals, powder-coated paints and plastics such as acrylics, polycarbonate and ABS. Indoor and outdoor use.



For Thin-Low-Profile Attachment

3M™ Dual Lock™ Reclosable Fastener SJ4570 features low-profile attachment. It bonds well to a variety of substrates including metals, power-coated paints and plastics such as acrylic, polycarbonates and ABS. Indoor and outdoor use.



Click or scan QR code

Reclosable Fasteners

Hook & Loop

3M™ Fastener Hook SJ3526N

3M™ Fastener SJ3526N is our high performance PSA nylon hook with a rubber adhesive and white polypropylene film liner. It provides a firm adhesive bond to a wide variety of surfaces including many low surface energy plastics and powder coats. It's designed for indoor use and has an engaged thickness of 4.4 mm.

- High performance rubber based adhesive designed for indoor applications requiring medium temperature resistance
- Provides a firm adhesive bond to a wide variety of surfaces
- Woven nylon is durable for thousands of closures



Product ID	Part Number	Product Name	MOQ	OU
7000002127	xxx	3M™ Fastener Hook SJ3526N, Black, 16 mm x 45.7 m, 4.4 mm	4	Roll
7000002130	xxx	3M™ Fastener Hook SJ3526N, Black, 25 mm x 45.7 m, 4.4 mm	3	Roll
7000029691	xxx	3M™ Fastener Hook SJ3526N, Black, 51 mm x 45.7 m, 4.4 mm	2	Roll
7000029692	xxx	3M™ Fastener Hook SJ3526N, White, 15 mm x 45.7 m, 4.4 mm	4	Roll
7000002132	xxx	3M™ Fastener Hook SJ3526N, White, 25 mm x 45.7 m, 4.4 mm	3	Roll

3M™ Loop Fastener SJ3527N

3M™ Fastener SJ3527N is our high performance PSA nylon loop with rubber adhesive and white polypropylene film liner. It provides a firm adhesive bond to a wide variety of surfaces including many low surface energy plastics and powder coats. It's designed for indoor use, and has an engaged thickness of 4.4 mm.

- Backed with a high performance rubber based adhesive, designed for indoor applications requiring medium temperature resistance
- Provides a firm adhesive bond to a wide variety of surfaces
- Durable for thousands of closures



Product ID	Part Number	Product Name	MOQ	OU
7000052220	xxx	3M™ Loop Fastener SJ3527N, Black 51 mm x 45.7 m, 4.4 mm	2	Roll
7000002128	xxx	3M™ Loop Fastener SJ3527N, Black, 16 mm x 45.7 m, 4.4 mm	4	Roll
7000002133	xxx	3M™ Loop Fastener SJ3527N, Black, 25 mm x 45.7 m, 4.4 mm	3	Roll
7000002131	xxx	3M™ Loop Fastener SJ3527N, White, 25 mm x 45.7 m, 4.4 mm	3	Roll

3M™ Loop Fastener SJ3571

3M™ Loop Fastener SJ3571 is our premium performance PSA nylon loop with acrylic tape and clear polyethylene film liner. It has 3.8 mm engaged thickness.

- High performance acrylic adhesive designed for high temperature resistance
- Durable for thousands of closures
- Quick fastening that helps reduce production time and costs



Product ID	Part Number	Product Name	MOQ	OU
7000001961	xxx	3M™ Loop Fastener SJ3571, Black, 25 mm x 45.7 m, 3.8 mm	3	Roll
7000051909	xxx	3M™ Loop Fastener SJ3571, Black, 51 mm x 45.7 m, 3.8 mm	2	Roll
7000001972	xxx	3M™ Loop Fastener SJ3571, White, 25 mm x 45.7 m, 3.8 mm	3	Roll

Reclosable Fasteners

3M™ Fastener Hook SJ3572

3M™ Hook Fastener SJ3572 is our premium performance PSA nylon loop with acrylic tape and clear polyethylene film liner. It has a 3.8 mm engaged thickness.

- High performance acrylic adhesive designed for high temperature resistance
- Durable for thousands of closures
- Quick fastening that helps reduce production time and costs



Product ID	Part Number	Product Name	MOQ	OU
7000001962	xxx	3M™ Fastener Hook SJ3572, Black, 25 mm x 45.7 m, 3.8 mm	3	Roll
7000051903	3572S50	3M™ Fastener Hook SJ3572, Black, 51 mm x 45.7 m, 3.8 mm	2	Roll
7000001973	xxx	3M™ Fastener Hook SJ3572, White, 25 mm x 45.7 m, 3.8 mm	3	Roll
7000051910	xxx	3M™ Fastener Hook SJ3572, White, 51 mm x 45.7 m, 3.8 mm	2	Roll

3M™ Hook and Loop Fastener SJ352B

3M™ Hook and Loop fastener SJ3520 is our white, high performance PSA nylon hook and loop with a rubber adhesive and white polypropylene film liner. It provides a firm adhesive bond to a wide variety of surfaces including many low surface energy plastics and powder coats. It's designed for indoor use and has an engaged thickness of 4.4 mm.

- High performance rubber based adhesive designed for indoor applications requiring medium temperature resistance
- Provides a firm adhesive bond to a wide variety of surfaces
- Woven nylon is durable for thousands of closures



Product ID	Part Number	Product Name	MOQ	OU
7100123266	xxx	3M™ Hook and Loop Fastener SJ352B, Black, 25 mm x 1.25 m, 4.4 mm, Blister IPC	4	Roll
7100123727	xxx	3M™ Hook and Loop Fastener SJ352B, White, 25 mm x 1.25 m, 4.4 mm, Blister IPC	4	Roll

3M™ Reclosable Fastener SJ352D

Use 3M™ Reclosable Fastener SJ352D for a range of applications in a wide variety of industries. Our fastener's quick fastening feature can help reduce production time and costs. This box offers 5 m of both hook and loop systems, SJ3526N and SJ3527N.

- Backed with a high performance rubber based adhesive designed for indoor applications requiring medium temperature resistance
- Provide a firm adhesive bond to a wide variety of surfaces
- Durable for thousands of closures



Product ID	Part Number	Product Name	MOQ	OU
7000070522	xxx	3M™ Fastener SJ352D, Black, 25 mm x 5 m, 4.4 mm, Twin Pack	4	Each

Reclosable Fasteners

3M™ Fastener Loop Flame Resistant SJ3418FR

3M™ Flame Resistant Loop Fastener SJ3418FR is one part of our two-part fastener solution designed to provide great durability for thousands of closures. It's a nylon, woven loop reclosable fastener with 3.8 mm engaged thickness, and is plain backed for sew on applications. It mates with SJ3419FR.

- Plain backed loop fastener for sew on applications. Replaces zippers, buttons, snaps and laces
- Provides durability for thousands of closures through woven nylon design
- Resist flames and extreme heat with these rigorously tested fasteners



Product ID	Part Number	Product Name	MOQ	OU
7000051776	xxx	3M™ Fastener Loop Flame Resistant SJ3418FR, Black, 25 mm x 45.7 m, 3.6 mm	12	Roll

3M™ Fastener Hook Flame Resistant SJ3419FR

3M™ Flame Resistant Hook Fastener SJ3419FR is one part of our two-part fastener solution designed to provide great durability for thousands of closures. It's a nylon, woven hook reclosable fastener with 3.8 mm engaged thickness, and is plain backed for sew on applications. It mates with SJ3418FR.

- Plain backed hook fastener for sew on applications. Replaces zippers, buttons, snaps and laces
- Provides durability for thousands of closures through woven nylon design
- Resist flames and extreme heat with these rigorously tested fasteners



Product ID	Part Number	Product Name	MOQ	OU
7000051782	6341925B	3M™ Fastener Hook Flame Resistant SJ3419FR, Black, 25 mm x 45.7 m	12	Roll

3M™ Fastener Loop Flame Resistant SJ3518FR

Fasten thousands of closures with 3M™ Flame Resistant Fastener SJ3518FR. Our loop fastener is durable, flame resistant (meeting F.A.R. 25.853 paragraph (a)(1)(i) 60 second vertical burn test) and backed with a rubber based adhesive for bonding to a wide variety of materials.

- Backed with a flame resistant rubber based adhesive for bonding to a wider variety of materials
- Provides durability for thousands of closures
- Rigorously tested to resist flames and extreme heat



Product ID	Part Number	Product Name	MOQ	OU
7000052222	xxx	3M™ Fastener Loop Flame Resistant SJ3518FR, Black, 25 mm x 45.7 m, 3.6 mm	3	Roll

Reclosable Fasteners

3M™ Fastener Hook Flame Resistant SJ3519FR

3M™ Flame Resistant Hook Fastener SJ3519FR is one part of our two-part fastener solution designed to provide great durability for thousands of closures. This nylon, woven loop reclosable fastener features a rubber based adhesive and is flame resistant meeting F.A.R. 25.853 paragraph (a)(1)(i) 60 second vertical burn test. It mates with SJ3518FR.



- Backed with a flame resistant rubber based adhesive for bonding to a wider variety of materials
- Provides durability for thousands of closures
- Rigorously tested to resist flames and extreme heat

Product ID	Part Number	Product Name	MOQ	OU
7000052226	xxx	3M™ Fastener Hook Flame Resistant SJ3519FR, Black, 25 mm x 45.7 m, 3.6 mm	3	Roll
7000052227	xxx	3M™ Fastener Hook Flame Resistant SJ3519FR, Black, 51 mm x 45.7 m, 3.6 mm	2	Roll

Dual Lock

3M™ Dual Lock™ Reclosable Fastener SJ3440

3M™ Dual Lock™ Reclosable Fastener SJ3440 is black, with 40 mushroom shaped stems / cm² and an engaged thickness of 4 mm. Our reclosable fastener is plain backed with no adhesive.



- Mushroom shaped stems, plain backed with no adhesive
- Type 250 mates to Type 170, 250 or 400
- Five times the tensile strength of typical hook-and-loop fasteners

Product ID	Part Number	Product Name	MOQ	OU
7000001979	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3440, Black, 25 mm x 45.7 m, 4.1 mm	2	Roll

3M™ Dual Lock™ Reclosable Fastener SJ3541

3M™ Dual Lock™ Reclosable Fastener SJ3541 has a rubber based adhesive on the back of a black, polypropylene reclosable fastener, making it suitable for bonding many plastics, powder coated paints and other low surface energy materials. Our reclosable fastener has 62 mushroom shaped stems / cm² with a 5.8 mm engaged thickness.



- Black fastener with mushroom shaped stems, backed with a rubber based pressure sensitive adhesive
- Type 400 mates to Type 170 or 250. Closes with an audible snap
- Designed to bond to many plastics, powder coated paints and other low surface energy materials

Product ID	Part Number	Product Name	MOQ	OU
7100108767	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3541, Black, 12.5 mm x 45.7 m, 5.7 mm	4	Roll
7100108765	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3541, Black, 19 mm x 45.7 m, 5.7 mm	24	Roll
7100108754	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3541, Black, 25 mm x 45.7 m, 5.7 mm	2	Roll
7100108764	SJ354150B	3M™ Dual Lock™ Reclosable Fastener SJ3541, Black, 50 mm x 45.7m	3	Roll

Reclosable Fasteners

3M™ Dual Lock™ Reclosable Fastener SJ3542

3M™ Dual Lock™ Reclosable Fastener SJ3542 has a rubber based adhesive on the back of a black, polypropylene reclosable fastener which makes it suitable for bonding many plastics, powder coated paints and other low surface energy materials. Our reclosable fastener has 26 mushroom shaped stems / cm² with a 5.8 mm engaged thickness.

- Black fastener with mushroom shaped stems, backed with a rubber based pressure sensitive adhesive
- Type 170 mates to Type 250, 400 or 170. Closes with an audible snap
- Designed to bond to many plastics, powder coated paints and other low surface energy materials



Product ID	Part Number	Product Name	MOQ	OU
7100108769	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3542, Black, 12 mm x 45.7 m, 5.7 mm	4	Roll
7100108756	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3542, Black, 25 mm x 45.7 m, 5.7 mm	2	Roll

3M™ Dual Lock™ Reclosable Fastener SJ3540

3M™ Dual Lock™ Reclosable Fastener SJ3540 has a rubber based adhesive on the back of a black, polypropylene reclosable fastener. It's suitable for bonding many plastics, powder coated paints and other low surface energy materials. Our reclosable fastener has 40 mushroom shaped stems / cm² with a 5.8 mm engaged thickness.

- Black fastener with mushroom shaped stems, backed with a rubber based pressure sensitive adhesive
- Type 250 mates to Type 170, 250 or 400. Closes with an audible snap
- Designed to bond to many plastics, powder coated paints and other low surface energy materials



Product ID	Part Number	Product Name	MOQ	OU
7100108766	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3540, Black, 12.5 mm x 45.7 m, 5.7 mm	4	Roll
7100123339	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3540, Black, 25 mm x 2.5 m, IPC	4	Roll
7100108749	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3540, Black, 25 mm x 45.7 m, 5.7 mm	2	Roll
7000001981	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3540, Black, 50 mm x 45.7 m, 5.7 mm	1	Roll
7000070523	xxx	3M™ Dual Lock™ Reclosable Fastener Twin Pack SJ354D, Black, 25 mm x 5 m, 5.7 mm, PN34516	4	Each

3M™ Dual Lock™ Reclosable Fasteners SJ3550CF

3M™ Dual Lock™ Reclosable Fastener SJ3550CF is the convenient alternative to traditional fastening methods, such as screws, nuts or bolts. It is designed to deliver a durable, reclosable fastening solution which bonds to a variety of substrates including metals, glass and plastics such as acrylics, polycarbonate and ABS. This fastener gives the adhesive a black appearance.

- Black, interlocking mushroom-shaped heads (250 stem density per square inch) provide strong, reliable and durable fastening that can be opened and closed multiple times
- Mates with Type 170, Type 250 or Type 400 stem densities to provide different strength combinations
- Clear, acrylic, tape bonds well to a variety of substrates including metals, glass and plastics such as acrylics, polycarbonate and ABS



Product ID	Part Number	Product Name	MOQ	OU
7100279569	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3550CF, Black, 12.5 mm x 45.7 m, Type 250	12	Roll
7100279337	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3550CF, Black, 19 mm x 45.7 m, Type 250	2	Roll
7100279420	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3550CF, Black, 25 mm x 45.7 m, Type 250	2	Roll
7100279570	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3550CF, Black, 50 mm x 45.7 m, Type 250	1	Roll

Reclosable Fasteners

3M™ Dual Lock™ Reclosable Fastener SJ3551CF

3M™ Dual Lock™ Reclosable Fastener SJ3551CF is the convenient alternative to traditional fastening methods, such as screws, nuts or bolts. It is designed to deliver a durable, reclosable fastening solution which bonds to a variety of substrates including metals, glass and plastics such as acrylics, polycarbonate and ABS. This fastener gives the adhesive a black appearance.



- Black, interlocking mushroom-shaped heads (400 stem density per square inch) provide strong, reliable and durable fastening that can be opened and closed multiple times
- Mates with Type 170 and Type 250 stem densities to provide different strength combinations
- Clear, acrylic, tape bonds well to a variety of substrates including metals, glass and plastics such as acrylics, polycarbonate and ABS

Product ID	Part Number	Product Name	MOQ	OU
7100279571	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3551CF, Black, 19 mm x 45.7 m, Type 400	2	Roll
7100279572	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3551CF, Black, 25 mm x 45.7 m, Type 400	2	Roll
7100279603	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3551CF, Black, 50 mm x 45.7 m, Type 400	3	Roll

3M™ Dual Lock™ Reclosable Fastener SJ3552CF

3M™ Dual Lock™ Reclosable Fastener SJ3552CF is a convenient alternative to traditional fastening methods, such as screws, nuts or bolts. It is designed to deliver a durable, reclosable fastening solution (which can be opened and closed multiple times) which bonds to a variety of substrates including metals and plastics such as acrylics, polycarbonate and ABS.



- Black, interlocking mushroom-shaped heads (170 stem density per square inch) provide strong, reliable and durable fastening that can be opened and closed multiple times
- Mates with Type 250 and Type 400 stem densities to provide different strength combinations
- Clear, acrylic, firm foam tape bonds well to a variety of substrates including metals and plastics such as acrylics, polycarbonate and ABS

Product ID	Part Number	Product Name	MOQ	OU
7100279613	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3552CF, Black, 19 mm x 45.7 m, Type 170	8	Roll
7100279614	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3552CF, Black, 25 mm x 45.7 m, Type 170	2	Roll

Reclosable Fasteners

3M™ Dual Lock™ Reclosable Fastener SJ3560

3M™ Dual Lock™ Reclosable Fastener SJ3560 has a clear acrylic adhesive on the back of a clear polypropylene reclosable fastener with 40 stems / cm² and 5.8 mm engaged thickness. Our reclosable fastener has a closure life of 1000 times before losing 50% of its original tensile strength.

- Designed to give a translucent appearance (glass, acrylic glass (PMMA), polycarbonate)
- Snap-in-place installation replaces screws, nails, snaps and rivets
- Five times the tensile strength of typical hook-and-loop fasteners



Product ID	Part Number	Product Name	MOQ	OU
7000070525	xxx	3M™ Dual Lock™ Reclosable Fastener SJ356D, Transparent, 25 mm x 5 m, 5.7 mm, Mini Pack	4	Each
7100123340	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3560, 25 mm x 2.5 m, IPC, Twin Pack	4	Roll
7000049200	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3560, 250, Clear with Flagged Splice, 152 mm x 46 m	1	Roll
7000001960	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3560, Clear, 25 mm x 45.7 m, Type 250	2	Roll
7000002103	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3560, Clear, 38 mm x 45.7 m, 5.7 mm, Type 2500	2	Roll
7000051892	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3560, Transparent, 12.7 mm x 45.7 m, 5.7 mm, Twin Pack	4	Roll
7000062467	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3560, Transparent, 19 mm x 1 m, 5.7 mm	30	Each
7000051893	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3560, Transparent, 19 mm x 45.7 m, 5.7 mm	2	Roll
7100017793	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3560, Transparent, 25 mm x 1.25 m, 5.7 mm	20	Roll
7000051894	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3560, Transparent, 51 mm x 45.7 m, 5.7 mm	1	Roll

3M™ Dual Lock™ Reclosable Fastener TB3560

3M™ Dual Lock™ Reclosable Fastener SJ3560 has a clear acrylic adhesive on the back of a clear polypropylene reclosable fastener with 40 stems / cm² and 5.8 mm engaged thickness. Our reclosable fastener has a closure life of 1000 times before losing 50% of its original tensile strength.

- Clear fastener with mushroom shaped stems backed with a clear, acrylic pressure sensitive adhesive
- Type 250 mates to Type 170, 250 or 400
- Five times the tensile strength of typical hook-and-loop fasteners



Product ID	Part Number	Product Name	MOQ	OU
7100020027	xxx	3M™ Dual Lock™ Reclosable Fastener TB3560, Clear, 25 mm x 3 m, 5.7 mm	8	Bag

Reclosable Fasteners

3M™ Dual Lock™ Reclosable Fastener SJ3870

3M™ Dual Lock™ Reclosable Fastener SJ3870 has a modified acrylic adhesive on the back of a black polypropylene reclosable fastener. Our product can be used both indoors and outside in a variety of applications; and has a slim 6.1 mm engaged thickness and long service life.



- Snap-in-place installation replaces screws, nails, snaps and rivets
- Five times the tensile strength of typical hook-and-loop fasteners
- Durable — up to 1,000 openings and closings before losing 50 % of original tensile strength

Product ID	Part Number	Product Name	MOQ	OU
7100108725	SJ387012	3M™ Dual Lock™ Reclosable Fastener SJ387B, Black, 12.5 mm x 41 m, 6.1 mm	12	Roll
7100123347	xxx	3M™ Dual Lock™ Reclosable Fastener SJ387B, Black, 25 mm x 2.5 m, 6.1 mm, Blister	4	Roll
7100214419	SJ387015.9	3M™ Dual Lock™ Reclosable Fastener SJ3870, Black, 15.9 mm x 41 m, 6.1 mm	2	Roll
7100108753	SJ387019	3M™ Dual Lock™ Reclosable Fastener SJ3870, Black, 19 mm x 41 m, 6.1 mm	8	Roll
7100108755	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3870, Black, 25 mm x 41 m, 6.1 mm, 40 pieces/cm²	2	Roll
7100108752	xxx	3M™ Dual Lock™ Reclosable Fastener SJ3870, Black, 50 mm x 41 m, 6.1 mm, Type 250 BULK	9	Roll

3M™ Dual Lock™ Reclosable Fastener Low Profile SJ4570

3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 is a modified acrylic adhesive on the back of a clear polypropylene reclosable fastener. Its modified acrylic adhesive enables you to bond medium to low surface energy materials such as metals, glass, many plastics and powder coated paints. With its 1.7 mm engaged thickness, our fastener is half the thickness of standard Dual Lock™ reclosable fasteners.



- Half the thickness of standard Dual Lock™ Reclosable Fasteners for low profile attachments
- Opens and closes up to 100 times before losing 50 % of original tensile strength
- Translucent fastener and adhesive is ideal for joining transparent materials

Product ID	Part Number	Product Name	MOQ	OU
7000070534	xxx	3M™ Dual Lock™ Reclosable Fastener Low Profile SJ457D, Transparent, 25 mm x 10 m, 1.7 mm, Mini Pack	4	Each
7000052144	xxx	3M™ Dual Lock™ Reclosable Fastener Low Profile SJ4570, Transparent, 16 mm x 45.7 m, 1.7 mm	3	Roll
7000002105	xxx	3M™ Dual Lock™ Reclosable Fastener Low Profile SJ4570, Transparent, 25 mm x 45.7 m, 1.7 mm	2	Roll
7000052203	xxx	3M™ Dual Lock™ Reclosable Fastener Low Profile SJ4570, Transparent, 51 mm x 45.7 m	1	Roll

Reclosable Fasteners

3M™ Dual Lock™ Reclosable Fastener Low Profile TB4570

3M™ Dual Lock™ Low Profile Reclosable Fastener TB4570 is our modified acrylic adhesive on the back of a clear polypropylene reclosable fastener. Its modified acrylic adhesive enables you to bond medium to low surface energy materials such as metals, glass, many plastics and powder coated paints. With its 1.7 mm engaged thickness it's half the thickness of standard Dual Lock™ reclosable fasteners.



- Clear, low profile fastener with mushroom shaped stems backed with a clear, low surface energy acrylic pressure sensitive adhesive
- Great for small jobs, prototyping and design evaluation
- Opens and closes 100 times

Product ID	Part Number	Product Name	MOQ	OU
7000124799	xxx	3M™ Dual Lock™ Reclosable Fastener Low Profile TB4570, Transparent, 25 mm x 3 m, 1.7 mm	8	Bag

3M™ Dual Lock™ Reclosable Fastener SJ4580

3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4580 is our clear acrylic adhesive on the back of a clear polypropylene reclosable fastener. It has a low profile 2.8 mm engaged thickness.



- Clear, low profile with mushroom shaped stems backed with clear, low surface energy acrylic pressure sensitive adhesive
- Low profile, polyolefin fastener is half the thickness of standard Dual Lock™ reclosable fasteners and is self-mating
- Opens and closes 100 times

Product ID	Part Number	Product Name	MOQ	OU
7000052205	xxx	3M™ Dual Lock™ Reclosable Fastener SJ4580, Transparent 102 mm x 45.7 m, 2.8 mm	1	Roll



Single Sided Tapes

3M™ Engineered Industrial Tapes

When extreme challenges threaten your product's results, the high-performance technology behind 3M™ Engineered Industrial Tapes can help you manage environmental variables. With tape collections created to take on your specific challenges, we make it easy to find the solutions you need – no matter the environment.



Withstand Temperatures

Extreme temperatures can cause damage or rework. Get powerful hot protection against and cold extremes.



Take on Weather

Moisture, dust and UV rays reduce product life. 3M tapes provide a defensive barrier to battle the elements.



Resist Chemicals

Aggressive chemicals can ruin parts. Keep surfaces safe with 3M solutions.



Regulate Friction

Irregular machine or part movement can cause factory slowdowns. Find innovative products to help improve efficiency.



Secure Anything

Heavy or critical parts can move and become damaged during shipment. Discover how to get an unbeatable hold.



Reduce Noise

Deliver the quieter product experience your customer's desire.



Click or scan QR code

3M™ Masking Tapes - Find the tape that you need!

We offer a full range of industrial masking tapes with unmatched dependability. Whether you need a tape that can withstand high temperatures or remove cleanly in UV conditions, you can trust 3M to help you get the job done right.



General Purpose Masking

Ideal for non-critical paint masking, but also bundling, sealing, attaching, and other applications

- 3M™ Value Masking Tape 101E
- 3M™ General Purpose Masking Tape 201E



Industrial Painting

Designed for industrial paint masking applications. Its temperature performance allows air-drying and oven-curing of paint.

- 3M™ Performance Industrial Masking Tape 301E
- 3M™ High Performance Industrial Masking Tape 401E
- Scotch® Performance Masking Tape 244
- Scotch® Aqua Washi Tape 2899



Fine Line Masking

Conformable tapes used to achieve sharp paint lines and colour separation for curves and straight lines.

- High Temperature Fine Line Tape 4737TL
- Scotch® High Temperature Fine Line Tape 4735
- Scotch® Fine Line Tape 218
- Scotch® Masking Tape 2800



High Temperature Masking

Designed for critical paint masking applications in the automotive, specialty vehicle, and industrial markets where excellent holding and high-temperature performance are required.

- 3M™ Specialty High Temperature Industrial Masking Tape 501E



Flatback Masking

These product group offers good adhesion in a wide temperature range. Durable backing paper provides high strength for splicing and metal protection applications. The tape has high tack, allowing for quick adhesion. It can adhere to a wide variety of paper substrates and can be cleanly removed from metals when used for protection.

- 3M™ Flatback Tape 2517
- 3M™ Performance Flatback Tape 2525



Click or scan QR code

3M™ Duct Tapes - Find the tape you need!

Duct tape products make all kinds of projects—from temporary fixing to indoor and outdoor repairs—both quick and effective.

They're a universal solution for a variety of jobs and quick repairs. 3M offers a full line of duct tapes to fit any job, from simple household repairs to professional MRO applications. They're conformable, hold securely and tear easily off the roll. Some are also weather resistant to withstand the harmful effects of sunlight and moisture.



All Purpose Duct Tape

For general maintenance, bunding, wrapping, attaching, sealing and protecting. Conformable with an instant bond. Good tensile strength for light-duty applications.

- 3M™ All Purpose Duct Tape DT8
- 3M™ Vinyl Duct Tape 3903i
- 3M™ Value Duct Tape 1900
- 3M™ General Purpose Duct Tape 2903



Heavy Duty Duct Tape

Designed for use in heavy duty industrial and MRO applications. Versatility with holding power. For irregular, hard-to-bond surfaces.


- 3M™ Heavy Duty Duct Tape DT11
- 3M™ Extra Heavy Duty Duct Tape 389
- 3M™ Heavy Duty Duct Tape 2904
- 3M™ Heavy Duty Duct Tape 3939



Super Duty Duct Tape

Designed to provide maximum-strength and is a long-lasting solution for high stress applications. Super thick for super tough jobs. Ultra-thick, water-resistant backing resists wear and abrasion.

- 3M™ Super Duty Duct Tape DT17

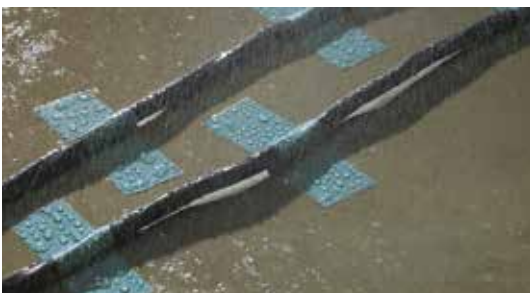

Specialty Duct Tape

Designed for use on most opaque surfaces with clean removal for up to 6 months in many outdoor and indoor applications. High instant adhesion. Superior strength for the most demanding applications.

- 3M™ Performance Plus Duct Tape 8979



Click or scan QR code

Single Sided Tapes

Vinyl Tapes

3M™ Durable Floor Marking Tape 971

3M™ Durable Floor Marking Tape 971 is comprised of a heavy-duty vinyl backing with a rubber adhesive. The tough, durable backing resists pallet drag and high forklift traffic and is easy to clean. This tape is designed for reliable long-term floor marking yet can still come up clean, in one piece.

- **DURABLE CONSTRUCTION:** Heavy-duty vinyl backing is ideal for high-traffic areas
- **CLEAN REMOVAL:** Unique rubber adhesive provides a strong bond and residue-free removal
- **TAPE YOUR WAY:** Linerless construction makes for easy application by hand or using the 3M™ Lane Marking Applicator M1



Product ID	Part Number	Product Name	MOQ	OU
7100253141	971B50IW	3M™ Durable Floor Marking Tape 971, Blue, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	6	Roll
7100253517	971B76	3M™ Durable Floor Marking Tape 971, Blue, 76.2 mm x 32.9 m, 0.43 mm	4	Roll
7100254036	971B101IW	3M™ Durable Floor Marking Tape 971, Blue, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	3	Roll
7100254034	971G50IW	3M™ Durable Floor Marking Tape 971, Green, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	6	Roll
7100254037	971G76IW	3M™ Durable Floor Marking Tape 971, Green, 76.2 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	4	Roll
7100254033	971VE100N	3M™ Durable Floor Marking Tape 971, Green, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	3	Roll
7100260621	971O50IW	3M™ Durable Floor Marking Tape 971, Orange, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	6	Roll
7100260043	971O76IW	3M™ Durable Floor Marking Tape 971, Orange, 76.2 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	4	Roll
7100260625	971O101IW	3M™ Durable Floor Marking Tape 971, Orange, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	3	Roll
7100259699	971R50IW	3M™ Durable Floor Marking Tape 971, Red, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	6	Roll
7100260624	971R76IW	3M™ Durable Floor Marking Tape 971, Red, 76.2 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	4	Roll
7100259700	971R101IW	3M™ Durable Floor Marking Tape 971, Red, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	3	Roll
7100251995	971W50IW	3M™ Durable Floor Marking Tape 971, White, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	6	Roll
7100251992	971W76IW	3M™ Durable Floor Marking Tape 971, White, 76.2 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	4	Roll
7100251993	971W101IW	3M™ Durable Floor Marking Tape 971, White, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	3	Roll
7100249185	971Y50IW	3M™ Durable Floor Marking Tape 971, Yellow, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	6	Roll
7100253513	971Y76IW	3M™ Durable Floor Marking Tape 971, Yellow, 76.2 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	4	Roll
7100253142	971Y101IW	3M™ Durable Floor Marking Tape 971, Yellow, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged	3	Roll

Single Sided Tapes

3M™ Durable Floor Marking Tape 971L

3M™ Ultra Durable Floor Marking Tape 971L is comprised of a Vinyl backing with a rubber adhesive and paper liner. The tough, thick vinyl backing resists pallet drag and high forklift traffic. This tape is designed for long-term floor marking, yet can still come up clean, in one piece.



- Durable Vinyl backing with a rubber adhesive designed for heavy traffic areas
- Backing maintains vivid color even when exposed to heavy abrasion from pallets or heavy equipment like forklifts
- Unique adhesive provides a strong bond yet promotes one-piece clean removal

Product ID	Part Number	Product Name	MOQ	OU
7100259598	971LB609	3M™ Durable Floor Marking Tape 971L, Blue, 609.6 mm x 32.9 m, 0.43 mm	1	Roll
7100259749	971LG609	3M™ Durable Floor Marking Tape 971L, Green, 609.6 mm x 32.9 m, 0.43 mm	1	Roll
7100260619	971LO609	3M™ Durable Floor Marking Tape 971L, Orange, 609.6 mm x 32.9 m, 0.43 mm	1	Roll
7100259750	971LR609	3M™ Durable Floor Marking Tape 971L, Red, 609.6 mm x 32.9 m, 0.43 mm	1	Roll
7100248651	971LW609	3M™ Durable Floor Marking Tape 971L, White, 609.6 mm x 32.9 m, 0.43 mm	1	Roll
7100248469	971LY609	3M™ Durable Floor Marking Tape 971L, Yellow, 609.6 mm x 32.9 m, 0.43 mm	1	Roll

3M™ Vinyl Tape 471

3M™ Vinyl Tape 471 is commonly used for marking hazards and aisles, colour-coding, paint masking, decorative trim, splicing, and more. Made from vinyl backing with rubber adhesive, our versatile tape resists scrapes, wear, and weathering for long lasting use.



- Maintains its colour when exposed to abrasion, wear and many solvents
- Unique stretch properties enable tape to remain stretched to conform to uneven surfaces without lifting and retracting
- Ideal for use on curved and irregular surfaces

Product ID	Part Number	Product Name	MOQ	OU
7000047456	xxx	3M™ Vinyl Tape 471, Black, 12 mm x 33 m, 0.14 mm	72	Roll
7100260595	471N12	3M™ Vinyl Tape 471, Black, 12.7 mm x 33 m, 0.13 mm	72	Roll
7100260596	471G1219	3M™ Vinyl Tape 471, Black, 19 mm x 33 m, 0.13 mm	48	Roll
7100260302	471B25	3M™ Vinyl Tape 471, Black, 25 mm x 33 m, 0.13 mm	36	Roll
7100260578	xxx	3M™ Vinyl Tape 471, Black, 25 mm x 33 m, 0.13 mm, Individually Wrapped	36	Roll
7000047458	47125B	3M™ Vinyl Tape 471, Black, 25 mm x 33 m, 0.14 mm	36	Roll
7100044640	xxx	3M™ Vinyl Tape 471, Black, 25 mm x 33 m, 0.14 mm	36	Roll
7100260594	471B38	3M™ Vinyl Tape 471, Black, 38 mm x 33 m, 0.13 mm	216	Roll
7000047459	xxx	3M™ Vinyl Tape 471, Black, 38 mm x 33 m, 0.14 mm	24	Roll
7000048401	xxx	3M™ Vinyl Tape 471, Black, 50 mm x 33 m, 0.14 mm	24	Roll
7100044330	xxx	3M™ Vinyl Tape 471, Black, 50 mm x 33 m, 0.14 mm	24	Roll
7100260161	xxx	3M™ Vinyl Tape 471, Black, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7100260571	471100B	3M™ Vinyl Tape 471, Black, 101 mm x 33 m, 0.13 mm	32	Roll
7000047460	xxx	3M™ Vinyl Tape 471, Black, 102 mm x 33 m, 0.14 mm	8	Roll
7100044626	xxx	3M™ Vinyl Tape 471, Blue, 6 mm x 33 m, 0.13 mm	12	Roll
7000048524	xxx	3M™ Vinyl Tape 471, Blue, 6 mm x 33 m, 0.14 mm, Wrapped	144	Roll
7100049359	xxx	3M™ Vinyl Tape 471, Blue, 9 mm x 33 m, 0.14 mm	12	Roll
7000048710	xxx	3M™ Vinyl Tape 471, Blue, 9 mm x 33 m, 0.14 mm	96	Roll

Single Sided Tapes

3M™ Vinyl Tape 471

3M™ Vinyl Tape 471 is commonly used for marking hazards and aisles, colour-coding, paint masking, decorative trim, splicing, and more. Made from vinyl backing with rubber adhesive, our versatile tape resists scrapes, wear, and weathering for long lasting use.



- Maintains its colour when exposed to abrasion, wear and many solvents
- Unique stretch properties enable tape to remain stretched to conform to uneven surfaces without lifting and retracting
- Ideal for use on curved and irregular surfaces

Product ID	Part Number	Product Name	MOQ	OU
7100044170	xxx	3M™ Vinyl Tape 471, Blue, 12 mm x 33 m, 0.14 mm, PN36408	72	Roll
7000047461	xxx	3M™ Vinyl Tape 471, Blue, 12.7 mm x 33 m, 0.14 mm	72	Roll
7000070322	xxx	3M™ Vinyl Tape 471, Blue, 16 mm x 33 m, 0.14 mm	60	Roll
7000047462	xxx	3M™ Vinyl Tape 471, Blue, 19 mm x 33 m, 0.14 mm	48	Roll
7100044653	xxx	3M™ Vinyl Tape 471, Blue, 19 mm x 33 m, 0.14 mm	12	Roll
7000047463	xxx	3M™ Vinyl Tape 471, Blue, 25 mm x 33 m, 0.14 mm	36	Roll
7100044654	xxx	3M™ Vinyl Tape 471, Blue, 25 mm x 33 m, 0.14 mm	36	Roll
7000048380	xxx	3M™ Vinyl Tape 471, Blue, 38 mm x 33 m, 0.14 mm	24	Roll
7000028851	xxx	3M™ Vinyl Tape 471, Blue, 50 mm x 33 m, 0.14 mm	24	Roll
7100044656	xxx	3M™ Vinyl Tape 471, Blue, 50 mm x 33 m, 0.14 mm	24	Roll
7100260160	xxx	3M™ Vinyl Tape 471, Blue, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7000048402	xxx	3M™ Vinyl Tape 471, Brown, 51 mm x 33 m, 0.14 mm	24	Roll
7100260597	471G12	3M™ Vinyl Tape 471, Green, 12.7 mm x 33 m, 0.13 mm	72	Roll
7000047477	xxx	3M™ Vinyl Tape 471, Green, 13 mm x 33 m, 0.14 mm	72	Roll
7100260483	471G19	3M™ Vinyl Tape 471, Green, 19 mm x 33 m, 0.13 mm	48	Roll
7000047478	xxx	3M™ Vinyl Tape 471, Green, 19 mm x 33 m, 0.14 mm	48	Roll
7100260472	xxx	3M™ Vinyl Tape 471, Green, 25 mm x 33 m, 0.13 mm	36	Roll
7000028855	xxx	3M™ Vinyl Tape 471, Green, 50 mm x 33 m, 0.14 mm	24	Roll
7100044652	xxx	3M™ Vinyl Tape 471, Green, 50 mm x 33 m, 0.14 mm, Wrapped	24	Roll
7100260162	xxx	3M™ Vinyl Tape 471, Green, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7100071665	471G1219	3M™ Vinyl Tape 471, Green, 1219 mm x 33 m	1	Roll
7000028854	xxx	3M™ Vinyl Tape 471, Orange, 51 mm x 33 m, 0.14 mm	24	Roll
7000047450	xxx	3M™ Vinyl Tape 471, Red, 9.5 mm x 33 m, 0.14 mm	96	Roll
7100261524	xxx	3M™ Vinyl Tape 471, Red, 9.5 mm x 33, 0.13 mm	96	Roll
7100260581	471R12	3M™ Vinyl Tape 471, Red, 12.7 mm x 33 m, 0.13 mm	72	Roll
7100260301	471Y12IW	3M™ Vinyl Tape 471, Red, 12.7 mm x 33 m, 0.13 mm, Individually Wrapped	72	Roll
7000047451	xxx	3M™ Vinyl Tape 471, Red, 12.7 mm x 33 m, 0.14 mm	72	Roll
7100260577	471R19	3M™ Vinyl Tape 471, Red, 19 mm x 33 m, 0.13 mm	48	Roll
7100260853	xxx	3M™ Vinyl Tape 471, Red, 19 mm x 33 m, 0.13 mm, Individually Wrapped	48	Roll
7100044624	xxx	3M™ Vinyl Tape 471, Red, 19 mm x 33 m, 0.14 mm	48	Roll
7000047452	47119R	3M™ Vinyl Tape 471, Red, 19 mm x 33 m, 0.14 mm, Bulk	48	Roll
7100260579	471R25	3M™ Vinyl Tape 471, Red, 25 mm x 33 m, 0.13 mm	36	Roll
7000047453	xxx	3M™ Vinyl Tape 471, Red, 25 mm x 33 m, 0.14 mm	36	Roll
7100260592	471R38	3M™ Vinyl Tape 471, Red, 38 mm x 33 m, 0.13 mm	24	Roll
7000047454	xxx	3M™ Vinyl Tape 471, Red, 38 mm x 33 m, 0.14 mm	24	Roll

Single Sided Tapes

3M™ Vinyl Tape 471

3M™ Vinyl Tape 471 is commonly used for marking hazards and aisles, colour-coding, paint masking, decorative trim, splicing, and more. Made from vinyl backing with rubber adhesive, our versatile tape resists scrapes, wear, and weathering for long lasting use.



- Maintains its colour when exposed to abrasion, wear and many solvents
- Unique stretch properties enable tape to remain stretched to conform to uneven surfaces without lifting and retracting
- Ideal for use on curved and irregular surfaces

Product ID	Part Number	Product Name	MOQ	OU
7000028850	xxx	3M™ Vinyl Tape 471, Red, 50 mm x 33 m, 0.14 mm	24	Roll
7100044655	xxx	3M™ Vinyl Tape 471, Red, 50 mm x 33 m, 0.14 mm, Wrapped	24	Roll
7100260125	xxx	3M™ Vinyl Tape 471, Red, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7100260593	xxx	3M™ Vinyl Tape 471, Red, 101 mm x 33 m, 0.13 mm	32	Roll
7000047455	xxx	3M™ Vinyl Tape 471, Red, 102 mm x 33 m, 0.14 mm	8	Roll
7100260695	471G25	3M™ Vinyl Tape 471, White, 12.7 mm x 33 m, 0.13 mm	360	Roll
7100260855	471W19	3M™ Vinyl Tape 471, White, 19 mm x 33 m, 0.13 mm	48	Roll
7000047473	47119W	3M™ Vinyl Tape 471, White, 19 mm x 33 m, 0.14 mm	48	Roll
7100260696	471W25	3M™ Vinyl Tape 471, White, 25 mm x 33 m, 0.13 mm	36	Roll
7000047474	xxx	3M™ Vinyl Tape 471, White, 25 mm x 33 m, 0.14 mm	36	Roll
7100260697	471W38	3M™ Vinyl Tape 471, White, 38 mm x 33 m, 0.13 mm	24	Roll
7000047475	47138W	3M™ Vinyl Tape 471, White, 38 mm x 33 m, 0.14 mm	24	Roll
7000028853	xxx	3M™ Vinyl Tape 471, White, 50 mm x 33 m, 0.14 mm, Bulk	24	Roll
7100044650	xxx	3M™ Vinyl Tape 471, White, 50 mm x 33 m, 0.14 mm, Wrapped	24	Roll
7100260598	xxx	3M™ Vinyl Tape 471, White, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7100260698	471W100	3M™ Vinyl Tape 471, White, 101 mm x 33 m, 0.13 mm	8	Roll
7000048775	xxx	3M™ Vinyl Tape 471, Yellow, 9 mm x 33 m, 0.14 mm	96	Roll
7100260484	471Y9	3M™ Vinyl Tape 471, Yellow, 9.5 mm x 33, 0.13 mm	96	Roll
7100044646	xxx	3M™ Vinyl Tape 471, Yellow, 12 mm x 33 m, 0.14 mm	72	Roll
7100260584	471Y12	3M™ Vinyl Tape 471, Yellow, 12.7 mm x 33 m, 0.13 mm	72	Roll
7100260582	471Y12IW	3M™ Vinyl Tape 471, Yellow, 12.7 mm x 33 m, 0.13 mm, Individually Wrapped	72	Roll
7100260585	471Y19	3M™ Vinyl Tape 471, Yellow, 19 mm x 33 m, 0.13 mm	48	Roll
7100260682	xxx	3M™ Vinyl Tape 471, Yellow, 19 mm x 33 m, 0.13 mm, Individually Wrapped	48	Roll
7000047467	xxx	3M™ Vinyl Tape 471, Yellow, 19 mm x 33 m, 0.14 mm, Bulk	1	Roll
7100044627	xxx	3M™ Vinyl Tape 471, Yellow, 19 mm x 33 m, 0.14 mm, Wrapped	48	Roll
7100260586	471Y25	3M™ Vinyl Tape 471, Yellow, 25 mm x 33 m, 0.13 mm	36	Roll
7100260569	xxx	3M™ Vinyl Tape 471, Yellow, 25 mm x 33 m, 0.13 mm, Individually Wrapped	36	Roll
7000047468	xxx	3M™ Vinyl Tape 471, Yellow, 25 mm x 33 m, 0.14 mm, Bulk	36	Roll
7100260587	471Y38	3M™ Vinyl Tape 471, Yellow, 38 mm x 33 m, 0.13 mm	24	Roll
7000047469	xxx	3M™ Vinyl Tape 471, Yellow, 38 mm x 33 m, 0.14 mm	24	Roll
7000028852	xxx	3M™ Vinyl Tape 471, Yellow, 50 mm x 33 m, 0.14 mm	24	Roll
7100260283	xxx	3M™ Vinyl Tape 471, Yellow, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7100044478	xxx	3M™ Vinyl Tape 471, Yellow, 51 mm x 33 m, 0.14 mm, Wrapped	24	Roll
7100260588	471Y76	3M™ Vinyl Tape 471, Yellow, 76 mm x 33 m, 0.13 mm	60	Roll
7100260694	471Y100	3M™ Vinyl Tape 471, Yellow, 101 mm x 33 m, 0.13 mm	8	Roll

Single Sided Tapes

3M™ Vinyl Tape 471 Transparent

3M™ Lane and Safety Marking Tape 471 is commonly used for marking hazards and aisles, colour-coding, paint masking, decorative trim, splicing, and more. Made from vinyl backing with rubber adhesive, our versatile tape resists scrapes, wear, and weathering for long lasting use.

- Maintains its colour when exposed to abrasion, wear and many solvents
- Unique stretch properties enable tape to remain stretched to conform to uneven surfaces without lifting and retracting
- Ideal for use on curved and irregular surfaces



Product ID	Part Number	Product Name	MOQ	OU
7000048403	xxx	3M™ Vinyl Tape 471, Transparent, 50 mm x 33 m, 0.14 mm, Bulk	1	Roll
7100044331	xxx	3M™ Vinyl Tape 471, Transparent, 50 mm x 33 m, 0.14 mm, Wrapped	24	Roll

3M™ Safety Stripe Tape 5702

3M™ Safety Stripe Tape 5702 is ideal for marking lanes, hazardous areas, protruding equipment, and low hanging objects in factories, warehouses, and hospitals. We use vivid, high visibility yellow and black diagonal stripes that lock into the vinyl to alert people about hazardous conditions.

- Applies instantly and is ready to use immediately
- Vivid yellow and black stripes are locked into the vinyl for permanent high visibility
- Stretches and conforms to curved surfaces and around corners for a tight fit



Product ID	Part Number	Product Name	MOQ	OU
7000048387	xxx	3M™ Safety Stripe Tape 5702, Black/Yellow 102 mm x 33 m, 0.14 mm	8	Roll
7000017005	xxx	3M™ Safety Stripe Tape 5702, Black/Yellow, 50 mm x 33 m, 0.14 mm	24	Roll
7000048386	xxx	3M™ Safety Stripe Tape 5702, Black/Yellow, 76 mm x 33 m, 0.14 mm	12	Roll
7000080483	570250	3M™ Safety Stripe Tape 5702, Yellow/Black, 50 mm x 33 m, 0.14 mm	3	Roll
7100260282	xxx	3M™ Safety Stripe Tape 5702, Yellow/Black, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll

Single Sided Tapes

3M™ General Purpose Vinyl Tape 764

3M™ General Purpose Vinyl Tape 764 is used for all non-critical applications, including colour coding, bundling and safety marking. Our non-corrosive, flexible vinyl tape is ideal for protecting parts, equipment and products from abrasions.



- Use for taping in all non-critical applications
- Protects parts, equipment and products from abrasions
- Bundle items, bundle and temporarily mark parts, machines, plus much more

Product ID	Part Number	Product Name	MOQ	OU
7000048917	xxx	3M™ General Purpose Vinyl Tape 764, Black, 50 mm x 33 m, 0.13 mm	24	Roll
7100260600	xxx	3M™ General Purpose Vinyl Tape 764, Black, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7000048921	xxx	3M™ General Purpose Vinyl Tape 764, Blue, 50 mm x 33 m, 0.13 mm	24	Roll
7100260288	xxx	3M™ General Purpose Vinyl Tape 764, Blue, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7000096407	xxx	3M™ General Purpose Vinyl Tape 764, Blue, 1250 mm x 33 m, 0.13 mm	3	Roll
7000144708	xxx	3M™ General Purpose Vinyl Tape 764, Green, 50 mm x 33 m, 0.13 mm	24	Roll
7100260280	xxx	3M™ General Purpose Vinyl Tape 764, Green, 50 mm x 33 m, 0.13 mm, Individually Wrapped Conveniently Packaged	12	Roll
7000048919	764V1245	3M™ General Purpose Vinyl Tape 764, Green, 1245 mm x 33 m, 0.13 mm	3	Roll
7000048918	xxx	3M™ General Purpose Vinyl Tape 764, Grey, 50 mm x 33 m, 0.13 mm	24	Roll
7000048923	xxx	3M™ General Purpose Vinyl Tape 764, Orange, 50 mm x 33 m, 0.13 mm	24	Roll
7100260281	xxx	3M™ General Purpose Vinyl Tape 764, Orange, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7000048922	xxx	3M™ General Purpose Vinyl Tape 764, Orange, 1245, mm x 33 m, 0.13 mm	3	Each
7000048924	xxx	3M™ General Purpose Vinyl Tape 764, Red, 50 mm x 33 m, 0.13 mm	24	Roll
7100260287	xxx	3M™ General Purpose Vinyl Tape 764, Red, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7000048915	xxx	3M™ General Purpose Vinyl Tape 764, Red, 1245 mm x 33 m, 0.13 mm	3	Roll
7000144707	xxx	3M™ General Purpose Vinyl Tape 764, White, 50 mm x 33 m, 0.13 mm	24	Roll
7100260286	xxx	3M™ General Purpose Vinyl Tape 764, White, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7000096405	xxx	3M™ General Purpose Vinyl Tape 764, White, 1250 mm x 33 m, 0.13 mm	3	Roll
7000144706	xxx	3M™ General Purpose Vinyl Tape 764, Yellow, 50 mm x 33 m, 0.13 mm	24	Roll
7100260285	xxx	3M™ General Purpose Vinyl Tape 764, Yellow, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7000048913	xxx	3M™ General Purpose Vinyl Tape 764, Yellow, 1245 mm x 33 m, 0.13 mm	3	Roll

Single Sided Tapes

3M™ General Purpose Vinyl Tape 764, Transparent

3M™ General Purpose Vinyl Tape 764 is used for all non-critical applications, including colour coding, bundling and safety marking. Our non-corrosive, flexible vinyl tape is ideal for protecting parts, equipment and products from abrasions.

- Use for taping in all non-critical applications
- Protects parts, equipment and products from abrasions
- Bundle items, bundle and temporarily mark parts, machines, plus much more

Product ID	Part Number	Product Name	MOQ	OU
7000048914	xxx	3M™ General Purpose Vinyl Tape 764, Transparent, 50 mm x 33 m, 0.13 mm	24	Roll

3M™ Hazard Warning Tape 766

3M™ Hazard Warning Tape 766 is a black and yellow striped vinyl tape. Our tape is used for marking hazardous areas, protruding equipment, or preventing accidents in factories, warehouses and hospitals.

- Use for taping in all non-critical applications
- Conformable backing makes vinyl tape ideal for use on curved and irregular surfaces
- Rubber adhesive provides good instant adhesion on many surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100260599	xxx	3M™ Hazard Warning Tape 766, Yellow/Black, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7100015263	xxx	3M™ Hazard Warning Tape 766i, Yellow/Black, 50 mm x 33 m, Bulk	24	Roll
7000096408	xxx	3M™ Hazard Warning Tape 766i, Yellow/Black, 1168 mm x 33 m	3	Roll

3M™ Hazard Warning Tape 767

3M™ Hazard Warning Tape 767 is a red and white striped vinyl tape. Our tape is used for marking hazardous areas, protruding equipment, or preventing accidents in factories, warehouses and hospitals.

- Use for taping in all non-critical applications
- Conformable backing makes vinyl tape ideal for use on curved and irregular surfaces
- Rubber adhesive provides good instant adhesion on many surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100260284	xxx	3M™ Hazard Warning Tape 767, Red/White, 50 mm x 33 m, Individually Wrapped Conveniently Packaged	12	Roll
7100015266	xxx	3M™ Hazard Warning Tape 767i, Red/White, 50 mm x 33 m	24	Roll

Single Sided Tapes

3M™ Vinyl Tape 472

Our 3M™ Vinyl Tape 472 provides both abrasion resistance and conformability to help solve unique bonding, patching, sealing and sand blast applications that everyday vinyl tapes just can't handle. Coated with an aggressive rubber adhesive, this black vinyl tape is a heavy duty, abrasion resistant solution to a variety of difficult, long-term and outdoor applications.

- Thick backing provides heavy duty protection and increased abrasion resistance
- Aggressive rubber adhesive bonds to a variety of surfaces for long-term use, even in outdoor applications
- Conformable backing makes vinyl tape ideal for use on curved and irregular surfaces



Product ID	Part Number	Product Name	MOQ	OU
7000048404	xxx	3M™ Vinyl Tape 472, Black, 51 mm x 33 m, 0.26 mm	24	Roll

3M™ Vinyl Tape 471+

3M™ Vinyl Tape 471+ is for accurate masking alignment with simple or complex patterns. Our tape provides clean removal without adhesive residue, even after a 30 minute bake cycle at 121 °C. It resists lifting from compound surfaces, contours, depressions and angles for precision paint results.

- Provides clean removal without adhesive residue after a 30 minute bake cycle at 121 °C. Even no ghosting effect
- Flexible and conformable tape creates fine paint lines for striping, colour separation and complex designs
- Semi-translucent backing allows for accurate alignment with simple and complex patterns



Product ID	Part Number	Product Name	MOQ	OU
7100055258	xxx	3M™ Vinyl Tape 471+, Indigo, 3 mm x 32 m, 0.14 mm, PN6404	12	Roll
7100055835	xxx	3M™ Vinyl Tape 471+, Indigo, 6 mm x 32 m, 0.14 mm, PN6405	12	Roll
7100057037	xxx	3M™ Vinyl Tape 471+, Indigo, 9 mm x 32 m, 0.14 mm, PN2510	12	Roll
7100056217	xxx	3M™ Vinyl Tape 471+, Indigo, 12 mm x 32 m, 0.14 mm, PN6408	12	Roll
7100055259	xxx	3M™ Vinyl Tape 471+, Indigo, 19 mm x 32 m, 0.14 mm, PN6409	12	Roll

3M™ Electroplating Tape 470

For tape applications requiring resistance to most chemicals used in electroplating and anodizing processes, use our 3M™ Electroplating Tape 470. This tan, conformable tape features an abrasion resistant backing ideal for use with plating chemicals, anodizing chemicals, milling, etching and peening operations.

- Excellent resistance to most chemicals used in typical electroplating and anodizing operations
- Resists most common solvents and works at temperatures up to 250°F/121°C
- Abrasion, moisture and wear resistant to withstand rugged working conditions



Product ID	Part Number	Product Name	MOQ	OU
7000001178	4702533	3M™ Electroplating Tape 470, Tan, 25 mm x 33 m, 0.18 mm	36	Roll
7000028889	47050	3M™ Electroplating Tape 470, Tan, 51 mm x 33 m, 0.18 mm	24	Roll
7010292805	xxx	3M™ Electroplating Tape 470, Tan, 1219 mm x 33 m	1	Roll

Single Sided Tapes

Foil Tapes

3M™ Aluminum Foil Tape 425

3M™ Aluminum Foil Tape 425 is for numerous applications across a broad range of industries. Our tape is comprised of a dead soft aluminium foil backing and coated with a highly engineered pressure sensitive acrylic adhesive.



- Thermally conductive tape helps dissipate heat and improves heating and cooling efficiency to protect temperature sensitive materials
- Resistant to chemicals to protect surfaces during de-paint process and other chemical masking operations
- Highly engineered acrylic adhesive provides long term durability, but removes cleanly after harsh masking applications

Product ID	Part Number	Product Name	MOQ	OU
7100053636	xxx	3M™ Aluminium Foil Tape 425, Silver, 19 mm x 55 m, 0.12 mm	48	Roll
7100059421	xxx	3M™ Aluminium Foil Tape 425, Silver, 25 mm x 55 m, 0.12 mm	36	Roll
7100053595	xxx	3M™ Aluminium Foil Tape 425, Silver, 38 mm x 55 m, 0.12 mm	24	Roll
7100053813	xxx	3M™ Aluminium Foil Tape 425, Silver, 50 mm x 55 m, 0.12 mm	24	Roll
7100053596	42550ABS	3M™ Aluminium Foil Tape 425, Silver, 50 mm x 55 m, 0.12 mm	24	Roll
7000081749	xxx	3M™ Aluminium Foil Tape 425, Silver, 50 mm x 55 m, 0.12 mm	12	Roll
7100053597	xxx	3M™ Aluminium Foil Tape 425, Silver, 75 mm x 55 m, 0.12 mm	12	Roll
7100053598	xxx	3M™ Aluminium Foil Tape 425, Silver, 102 mm x 55 m, 0.12 mm	12	Roll
7100053924	xxx	3M™ Aluminium Foil Tape 425, Silver, 150 mm x 55 m, 0.12 mm	2	Roll
7100053638	4251000	3M™ Aluminium Foil Tape 425, Silver, 1000 mm x 55 m, 0.12 mm	1	Roll

3M™ Aluminium Foil Tape 431

3M™ Aluminium Foil Tape 431 is for numerous applications across a broad range of industries. Our tape is comprised of a dead soft aluminium foil backing and coated with a highly engineered pressure sensitive acrylic adhesive.



- Conformable tape resists flames, moisture, weather, UV degradation, and many chemicals
- Thermally conductive tape reflects and dissipates radiant heat to protect plastic surfaces
- Light reflective tape enhances lighting efficiency


Product ID	Part Number	Product Name	MOQ	OU
7100039678	xxx	3M™ Aluminium Foil Tape 431, Silver, 12 mm x 55 m, 0.09 mm	72	Roll
7100230552	43119	3M™ Aluminium Foil Tape 431, Silver, 19 mm x 55 m, 0.08 mm	64	Roll
7100230550	xxx	3M™ Aluminium Foil Tape 431, Silver, 25 mm x 55 m, 0.08 mm	48	Roll
7100039317	43138	3M™ Aluminium Foil Tape 431, Silver, 38 mm x 55 m, 0.09 mm	32	Roll
7100040976	xxx	3M™ Aluminium Foil Tape 431, Silver, 50 mm x 55 m, 0.09 mm	24	Roll

Single Sided Tapes

3M™ Aluminium Foil Tape 1436F

3M™ Aluminum Foil Tape 1436F is our high quality Soft aluminium foil tape for internal and external ducting work. It offers an aggressive adhesive for ease of application.

- Foil backing provides an excellent reflective surface for both heat and light
- Bonds to various surfaces with an aggressive rubber adhesive
- Low water vapour transmission rate offers excellent sealing and patching performance




Product ID	Part Number	Product Name	MOQ	OU
7000062000	143650	3M™ Aluminium Foil Tape 1436, Silver, 50 mm x 50 m	12	Roll

3M™ Aluminium Foil Tape 1436

3M™ Aluminum Foil Tape 1436 is our high quality aluminium foil tape for internal and external ducting work. It offers an aggressive adhesive for ease of application.

- Foil backing provides an excellent reflective surface for both heat and light
- Bonds to various surfaces with an aggressive rubber adhesive
- Low water vapour transmission rate offers excellent sealing and patching performance



Product ID	Part Number	Product Name	MOQ	OU
7000111971	xxx	3M™ Aluminium Foil Tape 1436, Silver, 50 mm x 50 m	16	Roll
7000111993	xxx	3M™ Aluminium Foil Tape 1436, Silver, 75 mm x 50 m	12	Roll
7000096162	xxx	3M™ Aluminium Foil Tape 1436, Silver, 100 mm x 50 m	8	Roll
7000111549	xxx	3M™ Aluminium Foil Tape 1436, Silver, 1000 mm x 50 m	1	Roll

3M™ Lead Foil Tape 420

Our 3M™ Lead Foil Tape 420 is an electrically and thermally conductive tape. This highly conformable tape resists flame, moisture, weather, UV degradation, chemicals and radiation. Mated with an easy-release film liner, our malleable tape can be shaped into complex or detailed patterns or die-cut into specific shapes to meet assembly and manufacturing process needs.

- Conformable tape resists flame, moisture, weather, UV degradation, and many chemicals used in electroplating and anodizing processes
- The rubber-based adhesive bonds well a variety of surface, including most metals
- Performs over a wide variety of temperatures



Product ID	Part Number	Product Name	MOQ	OU
7100245634	xxx	3M™ Lead Foil Tape 420, Dark Silver, 6.4 mm x 33 m, 0.17 mm	23	Roll
7100221164	xxx	3M™ Lead Foil Tape 420, Dark Silver, 9 mm x 33 m, 0.17 mm	16	Roll
7100221166	xxx	3M™ Lead Foil Tape 420, Dark Silver, 38 mm x 33 m, 0.17 mm	5	Roll
7100221142	xxx	3M™ Lead Foil Tape 420, Dark Silver, 100 mm x 33 m, 0.17 mm	2	Roll
7000049101	xxx	3M™ Lead Foil Tape 420, Silver, 12.7 mm x 33 m, 0.17 mm	18	Roll
7000029006	xxx	3M™ Lead Foil Tape 420, Silver, 19 mm x 33 m, 0.17 mm	12	Roll
7000001314	xxx	3M™ Lead Foil Tape 420, Silver, 25 mm x 33 m, 0.17 mm	9	Roll
7000001315	xxx	3M™ Lead Foil Tape 420, Silver, 50 mm x 33 m, 0.17 mm	6	Roll
7000049133	xxx	3M™ Lead Foil Tape 420, Silver, 584 mm x 33 m, 0.17 mm	1	Roll

Single Sided Tapes

Polyester Tapes

3M™ Polyester Tape 8905

Designed to perform in demanding work conditions, our 3M Polyester Tape 8905 is a thick and durable solution for high temperature masking operations such as powder coating. Coated with a silicone adhesive, this tape is designed to bond to a variety of difficult surfaces. It is chemical resistant and performs under a wide range of temperatures and environments.



- Works in demanding conditions and high temperatures ranging from -60°F (-50°C) to 400°F (204°C)
- Clean removal during high-temperature masking operations such as powder coating
- Polyester film offers excellent thermal and chemical resistance

Product ID	Part Number	Product Name	MOQ	OU
7000036203	xxx	3M™ Polyester Tape 8905, Blue, 25 mm x 66 m, 0.16 mm	36	Roll
7000049604	xxx	3M™ Polyester Tape 8905, Blue, 51 mm x 66 m, 0.16 mm	24	Roll

3M™ Polyester Tape 8902

Our 3M™ Polyester Tape 8902 excels in high temperature masking operations such as powder coat painting. Coated with a silicone adhesive, this tape bonds to a variety of difficult surfaces. It is chemical resistant and performs under a wide range of temperatures and environments. This tape is a thicker version of 3M™ Polyester Tape 8901.



- Works in demanding conditions and high temperatures ranging from -60°F (-50°C) to 400°F (204°C)
- Clean removal during high-temperature masking operations such as powder coating
- Polyester film offers excellent thermal and chemical resistance while maintaining flexibility

Product ID	Part Number	Product Name	MOQ	OU
7100245592	xxx	3M™ Polyester Tape 8902, Blue, 12 mm x 66 m, 0.09 mm	72	Roll
7000049603	xxx	3M™ Polyester Tape 8902, Blue, 51 mm x 66 m, 0.086 mm	24	Roll

3M™ Polyester Tape 8901

Thin and conformable, our 3M™ Polyester Tape 8901 excels in high temperature masking operations such as powder coat painting. Coated with a silicone adhesive, this tape bonds to a variety of difficult surfaces. It is chemical resistant and performs under a wide range of temperatures and environments.



- Works in demanding conditions and high temperatures ranging from -60°F (-50°C) to 400°F (204°C)
- Clean removal during high-temperature masking operations such as powder coating
- Polyester film offers excellent thermal and chemical resistance while maintaining flexibility

Product ID	Part Number	Product Name	MOQ	OU
7000049597	xxx	3M™ Polyester Tape 8901, Blue, 25 mm x 66 m, 0.023 mm	36	Roll
7000096398	xxx	3M™ Polyester Tape 8901, Blue, 25 mm x 80 mm, 0.06 mm	36	Each

Single Sided Tapes

3M™ Polyester Tape 876

3M™ Polyester Tape 876 has a thin, high strength polyester film that provides a degree of conformability while meeting low caliper requirements. This tape works in demanding conditions and provides satisfactory performance in short term bake cycles at 400°F (204°C), as well as longer term autoclave processes up to 350°F (177°C). High temperature resistance and rubber adhesive makes it ideal for paint masking, liquid or powder coat processes where clean removal with no residue is required.

- Works in demanding conditions including autoclave cycles up to 350°F (177°C)
- Easy and clean removal post processing with no residue
- Green color for easy identification and positioning



Product ID	Part Number	Product Name	MOQ	OU
7100167280	87619	3M™ Polyester Tape 876, Green, 19 mm x 66 m, 0.08 mm	64	Roll
7100156415	87625	3M™ Polyester Tape 876, Green, 25 mm x 66 m, 0.08 mm	48	Roll
7100167276	8761220	3M™ Polyester Tape 876, Green, 1220 mm x 66 m, 0.08 mm	1	Roll

3M™ Polyester Tape 875

3M™ Polyester Tape 875 has a thin, high strength polyester film that provides a degree of conformability while meeting low caliper requirements. This tape works in demanding conditions and provides satisfactory performance in short term bake cycles at 204°C (400°F), as well as longer term autoclave processes up to 177°C (350°F). High temperature resistance and rubber adhesive makes it ideal for paint masking, liquid or powder coat processes where clean removal with no residue is required.

- Works in demanding conditions including High Temperature and autoclave cycles up to 177°C
- Easy and clean removal post processing with no residue
- Green colour for easy identification and positioning



Product ID	Part Number	Product Name	MOQ	OU
7100167284	87519	3M™ Polyester Tape 875, Green, 19 mm x 66 m, 0.05 mm	64	Roll
7100156413	87525	3M™ Polyester Tape 875, Green, 25 mm x 66 m, 0.05 mm	48	Roll
7100167269	8751220	3M™ Polyester Tape 875, Green, 1220 mm x 66 m, 0.05 mm	1	Roll

3M™ Polyester Film Tape 850 Silver

For splicing applications requiring quick stick and an aggressive, permanent hold, use our 3M™ Polyester Tape 850. Used in a variety of applications, including web processing, label protection, and marking. This tape is available in various Colours, as well as a transparent.

- Aggressive acrylic adhesive provides quick stick and excellent long-term holding in splicing applications
- Thin, high strength polyester film meets low calliper requirements which won't interfere with most machinery processes
- Get high tear and temperature resistance



Product ID	Part Number	Product Name	MOQ	OU
7000047522	xxx	3M™ Polyester Film Tape 850, Silver, 25 mm x 66 m, 0.05 mm	36	Roll
7000048711	xxx	3M™ Polyester Film Tape 850, Silver, 38 mm x 66 m, 0.05 mm	24	Roll
7000028858	xxx	3M™ Polyester Film Tape 850, Silver, 51 mm x 66 m, 0.05 mm	24	Roll
7100069442	xxx	3M™ Polyester Film Tape 850, Silver, 610 mm x 66 m, 0.05 mm	1	Roll

Single Sided Tapes

3M™ Polyester Film Tape 850

For splicing applications requiring quick stick and an aggressive, permanent hold, use our 3M™ Polyester Tape 850. Used in a variety of applications, including web processing, label protection, and marking. This tape is available in various Colours, as well as a transparent.

- Aggressive acrylic adhesive provides quick stick and excellent long-term holding in splicing applications
- Thin, high strength polyester film meets low calliper requirements which won't interfere with most machinery processes
- Polyester backing resists tearing and protects surfaces from abrasion and rough handling



Product ID	Part Number	Product Name	MOQ	OU
7100065923	xxx	3M™ Polyester Film Tape 850, Black, 25 mm x 66 m, 0.05 mm	36	Roll
7000048772	xxx	3M™ Polyester Film Tape 850, Black, 38 mm x 66 m, 0.05 mm	24	Roll
7000048409	xxx	3M™ Polyester Film Tape 850, Black, 51 mm x 66 m, 0.05 mm	24	Roll
7100065924	xxx	3M™ Polyester Film Tape 850, Clear, 25 mm x 66 m, 0.05 mm	36	Roll
7000028669	xxx	3M™ Polyester Film Tape 850, Red, 25 mm x 66 m, 0.05 mm	36	Roll
7000028857	xxx	3M™ Polyester Film Tape 850, Red, 51 mm x 66 m, 0.05 mm	1	Roll

3M™ Polyester Tape 8403

For anodizing, composite bonding and splicing, use 3M™ Polyester Tape 8403. This translucent green tinted tape is coated with a silicone adhesive that bonds well on difficult surfaces, including silicone coated papers and films. It is chemical resistant and performs under a wide range of temperatures and environments. This tape is a thicker version of our 3M™ Polyester Tape 8402.

- Works in demanding conditions and retains flexibility in autoclave conditions in temperatures ranging from -60°F (-50°C) to 350°F (177°C)
- Silicone adhesive provides clean removal from a variety of surfaces
- Chemical resistant adhesive and backing provides durability in difficult environments, such as anodization



Product ID	Part Number	Product Name	MOQ	OU
7000001173	xxx	3M™ Polyester Tape 8403, Green, 51 mm x 66 m, 0.061 mm	24	Roll

3M™ Anodization Masking Tape 8985L

3M™ Anodization Masking Tape 8985L is a reliable non-silicone solution for Type I (chromic acid) anodization. Designed for performance, it is specifically resistant to chromic acid and provides sharp lines with a rubber adhesive for easy removal.

- Designed specifically for masking in chromic acid (Type I) anodization baths
- Transparent purple tape for fast, easy and accurate positioning
- Provides sharp masking lines and minimizes leaking to reduce the need for part rework



Product ID	Part Number	Product Name	MOQ	OU
7100207280	xxx	3M™ Anodization Masking Tape 8985L, Purple, 25 mm x 66 m	48	Roll
7100207277	xxx	3M™ Anodization Masking Tape 8985L, Purple, 50 mm x 66 m	24	Roll
7100207284	xxx	3M™ Anodization Masking Tape 8985L, Purple, 305 mm x 66 m	4	Roll
7100211808	xxx	3M™ Anodization Masking Tape 8985L, Purple, 610 mm x 66 m	1	Roll
7100207286	xxx	3M™ Anodization Masking Tape 8985L, Purple, 1220 mm x 66 m	1	Roll

Single Sided Tapes

PTFE tapes

3M™ PTFE Film Tape 5480

3M™ PTFE Skived Film Tape 5480 uses a skived, polytetrafluoroethylene (PTFE), conformable film backing. Our tape offers an extremely low coefficient of friction.



- Non-stick PTFE film provides an exceptionally slick surface for easy clean-up
- Silicone adhesive provides clean removal from a variety of surfaces
- Wide temperature range for performance on heated machinery and equipment

Product ID	Part Number	Product Name	MOQ	OU
7000050128	xxx	3M™ PTFE Film Tape 5480, Grey, 25 mm x 33 m, 0.09 mm	9	Roll
7000029152	xxx	3M™ PTFE Film Tape 5480, Grey, 51 mm x 33 m, 0.09 mm	6	Roll

3M™ PTFE Film Tape 5490

3M™ PTFE Film Tape 5490 uses an extruded polytetrafluoroethylene (PTFE) film backing. This tape offers an extremely low coefficient of friction which, in combination with a pressure sensitive silicone adhesive, creates a smooth, non-stick surface over a variety of substrates to assist in the movement of materials in many types of lay-flat applications.



- Non-stick PTFE film provides an exceptionally slick surface for easy clean-up
- Silicone adhesive provides clean removal from a variety of surfaces
- Wide temperature range for performance on heated machinery and equipment

Product ID	Part Number	Product Name	MOQ	OU
7000050122	xxx	3M™ PTFE Film Tape 5490, Grey, 12 mm x 33 m, 0.09 mm	18	Roll
7000050121	xxx	3M™ PTFE Film Tape 5490, Grey, 19 mm x 33 m, 0.09 mm	12	Roll
7000049045	xxx	3M™ PTFE Film Tape 5490, Grey, 19 mm x 33 m, 0.09 mm	12	Roll
7000050120	xxx	3M™ PTFE Film Tape 5490, Grey, 25 mm x 33 m, 0.09 mm	9	Roll
7000049046	xxx	3M™ PTFE Film Tape 5490, Grey, 25 mm x 33 m, 0.09 mm	9	Roll
7000049047	xxx	3M™ PTFE Film Tape 5490, Grey, 38 mm x 33 m, 0.09 mm	6	Roll
7000049048	xxx	3M™ PTFE Film Tape 5490, Grey, 50 mm x 33 m, 0.09 mm	6	Roll
7000050118	xxx	3M™ PTFE Film Tape 5490, Grey, 51 mm x 33 m, 0.09 mm	6	Roll
7000029151	xxx	3M™ PTFE Film Tape 5490, Grey, 76.2 mm x 33 m, 0.09 mm	3	Roll
7000048721	xxx	3M™ PTFE Film Tape 5490, Grey, 304.8 mm x 33 m, 0.09 mm	1	Roll

Single Sided Tapes

3M™ PTFE Film Tape 5491

Our 3M™ PTFE Film Tape 5491 uses an extruded polytetrafluoroethylene (PTFE) film backing. This tape offers an extremely low coefficient of friction which, in combination with a pressure sensitive silicone adhesive, creates a smooth, non-stick surface over a variety of substrates to assist in the movement of materials in many types of lay-flat applications.

- Non-stick PTFE film provides an exceptionally slick surface for easy clean-up
- Silicone adhesive provides clean removal from a variety of surfaces
- Wide temperature range for performance on heated machinery and equipment



Product ID	Part Number	Product Name	MOQ	OU
7100221270	xxx	3M™ PTFE Film Tape 5491, Brown, 12.7 mm x 33 m, 0.17 mm, Boxed	14	Roll
7000001582	xxx	3M™ PTFE Film Tape 5491, Grey, 25 mm x 33 m, 0.17 mm	9	Roll
7000001581	xxx	3M™ PTFE Film Tape 5491, Grey, 51 mm x 33 m, 0.17 mm	6	Roll
7000029150	xxx	3M™ PTFE Film Tape 5491, Grey, 76 mm x 33 m, 0.17 mm	3	Roll

3M™ Glass Cloth Tape 5453

Our premium performance 3M™ PTFE Glass Cloth Tape 5453 has a brown woven glass cloth backing impregnated with PTFE (polytetrafluoroethylene). This tape provides a slick surface on process machinery and offers an extremely low coefficient of friction which, in combination with a pressure sensitive silicone adhesive, creates a non-stick surface that performs at elevated temperatures.

- Premium glass cloth reinforced backing provides greater tensile strength and resistance to tears and punctures than typical PTFE film backed tapes
- Silicone adhesive offers high temperature performance and long aging
- Provides a non-stick, low friction surface on heat sealing and packaging equipment



Product ID	Part Number	Product Name	MOQ	OU
7000050132	xxx	3M™ Glass Cloth Tape 5453, Brown, 19 mm x 33 m, 0.21 mm	12	Roll
7000080556	xxx	3M™ Glass Cloth Tape 5453, Brown, 19 mm x 33 m, 0.21 mm	2	Roll
7000050131	xxx	3M™ Glass Cloth Tape 5453, Brown, 25 mm x 33 m, 0.21 mm	9	Roll
7000144794	xxx	3M™ Glass Cloth Tape 5453, Brown, 50 mm x 33 m, 0.21 mm	6	Roll
7100035225	xxx	3M™ Glass Cloth Tape 5453, Brown, 50 mm x 33 m, 0.21 mm	1	Roll
7000050130	xxx	3M™ Glass Cloth Tape 5453, Brown, 76 mm x 33 m, 0.21 mm	15	Roll
7000048689	xxx	3M™ Glass Cloth Tape 5453, Brown, 254 mm x 33 m, 0.21 mm	1	Roll
7000048705	xxx	3M™ Glass Cloth Tape 5453, Brown, 305 mm x 33 m, 0.21 mm	1	Roll

Single Sided Tapes

3M™ PTFE Glass Cloth Tape 5451

Our premium performance 3M™ PTFE Glass Cloth Tape 5451 has a brown woven glass cloth backing impregnated with PTFE (polytetrafluoroethylene). This tape provides a slick surface on process machinery and offers an extremely low coefficient of friction which, in combination with a pressure sensitive silicone adhesive, creates a non-stick surface that performs at elevated temperatures.



- Premium glass cloth reinforced backing provides greater tensile strength and resistance to tears and punctures than typical PTFE film backed tapes
- Silicone adhesive offers high temperature performance and long aging
- Provides a non-stick, low friction surface on heat sealing and packaging equipment

Product ID	Part Number	Product Name	MOQ	OU
7000029154	xxx	3M™ Glass Cloth Tape 5451, Brown, 25 mm x 33 m, 0.14 mm	9	Roll
7000029153	xxx	3M™ Glass Cloth Tape 5451, Brown, 50 mm x 33 m, 0.14 mm	6	Roll


Single Sided Tapes

UHMW Tapes

3M™ UHMW PE Film Tape 5425

3M™ UHMW PE Film Tape 5425 protects surfaces from abrasion. Our tape has a thickness 0.08 mm that offers excellent abrasion resistance, making it ideal for many tough impact wear or sliding applications. It creates a 'slip plane' effect to allow contact without wear with an excellent solvent resistance.

- Get resistance from abrasion, oil and various other solvents
- Achieve low coefficient of friction for 'slip plane' effect between surfaces
- Reduce squeaks, rattles and other noises that occur with movement



Product ID	Part Number	Product Name	MOQ	OU
7100226808	xxx	3M™ UHMW PE Film Tape 5425, Transparent, 25 mm x 33 m, 0.13 mm	8	Roll

3M™ UHMW PE Film Tape 5423

3M™ UHMW PE Film Tape 5423 protects surfaces from abrasion. Our tape has a thickness 0.025 mm that offers excellent abrasion resistance, making it ideal for many tough impact wear or sliding applications. It creates a 'slip plane' effect to allow contact without wear.

- Translucent, abrasion resistant backing helps protect surfaces from wear
- Low coefficient of friction for 'slip plane' effect between surfaces
- Rubber adhesive provides good initial tack for immediate bonding to material surface



Product ID	Part Number	Product Name	MOQ	OU
7000050073	xxx	3M™ UHMW PE Film Tape 5423, Transparent, 12.7 mm x 16.5 m, 0.3 mm	18	Roll
7000029144	xxx	3M™ UHMW PE Film Tape 5423, Transparent, 19 mm x 16.5 m, 0.3 mm	12	Roll
7000029146	xxx	3M™ UHMW PE Film Tape 5423, Transparent, 25 mm x 16.5 m, 0.3 mm	9	Roll
7000050077	542338	3M™ UHMW PE Film Tape 5423, Transparent, 38 mm x 16.5 m, 0.3 mm	6	Roll
7000035835	xxx	3M™ UHMW PE Film Tape 5423, Transparent, 51 mm x 16.5 m, 0.3 mm	6	Roll
7000050078	xxx	3M™ UHMW PE Film Tape 5423, Transparent, 76 mm x 16.5 m, 0.3 mm	3	Roll
7000072738	xxx	3M™ UHMW PE Film Tape 5423, Transparent, 100 mm x 16.5 m, 0.3 mm	24	Roll
7000029136	xxx	3M™ UHMW PE Film Tape 5423, Transparent, 102 mm x 16.5 m, 0.3 mm	3	Roll
7000048716	xxx	3M™ UHMW PE Film Tape 5423, Transparent, 254 mm x 16.5 m, 0.3 mm	1	Roll
7000048702	xxx	3M™ UHMW PE Film Tape 5423, Transparent, 305 mm x 16.5 m, 0.3 mm	1	Roll
7000001210	5423610	3M™ UHMW PE Film Tape 5423, Transparent, 610 mm x 16.5 m, 0.3 mm	1	Roll
7000072740	xxx	3M™ UHMW PE Film Tape 5423, Transparent, 610 mm x 16.5 m, 0.3 mm	1	Roll

Single Sided Tapes

3M™ UHMW PE Film Tape 5421

3M™ UHMW PE Film Tape 5421 protects surfaces from abrasion. Our tape has a thickness 0.01 mm that offers excellent abrasion resistance, making it ideal for many tough impact wear or sliding applications. It creates a 'slip plane' effect to allow contact without wear. This is a thinner version of 3M™ UHMW-PE Film Tape 5423.



- Translucent, abrasion resistant backing helps protect surfaces from wear
- Low coefficient of friction for 'slip plane' effect between surfaces
- Rubber adhesive provides good initial tack for immediate bonding to material surface

Product ID	Part Number	Product Name	MOQ	OU
7000050074	xxx	3M™ UHMW PE Film Tape 5421, Clear, 19 mm x 16.5 m, 0.17 mm	12	Roll
7000050075	xxx	3M™ UHMW PE Film Tape 5421, Clear, 25 mm x 16.5 m, 0.17 mm	9	Roll
7000050076	xxx	3M™ UHMW PE Film Tape 5421, Clear, 51 mm x 16.5 m, 0.17 mm	6	Roll
7000050053	xxx	3M™ UHMW PE Film Tape 5421, Clear, 102 mm x 16.5 m, 0.17 mm	3	Roll

Single Sided Tapes

Filament Tapes

Scotch® Bi-Directional Universal Filament Tape 8959

Scotch® Bi-Directional Filament Tape 8959 is a tough box-sealing tape with exceptional adhesion that also resists nicks, abrasions, moisture, scuffing, and center seam splitting in both longitudinal and horizontal directions.

- Extra security - with filaments down the length and across the width, tape is difficult to hand-tear in any direction
- Fiberglass filaments run in bi-directional pattern, providing high tensile strength across the width and length of the tape
- Ideal strength for heavy-weight packages and overseas/export packing and shipping



Product ID	Part Number	Product Name	MOQ	OU
7000095602	xxx	Scotch® Bi-Directional Filament Tape 8959, Transparent, 100 mm x 50 m, 0.15 mm		Each
7100157801	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 15 mm x 5000 m, 0.15 mm	1	Roll
7000062460	895919BL	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 19 mm x 50 m, 0.15 mm	12	Roll
7000095268	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 19 mm x 50 m, 0.15 mm	48	Roll
7000095261	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 25 mm x 50 m, 0.15 mm	36	Roll
7000095309	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 38 mm x 50 m, 0.15 mm	24	Roll
7000062461	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 38 mm x 50 m, 0.15 mm	12	Roll
7000095244	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 50 mm x 50 m, 0.15 mm	18	Roll
7000062459	H895950	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 50 mm x 50 m, 0.15 mm	12	Roll
7100144090	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 50 mm x 50 m, 0.15 mm	18	Roll
7000095349	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 50 mm x 200 m, 0.15 mm	216	Roll
7000095635	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 50 mm x 400 m, 0.15 mm	216	Roll
7000095322	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 75 mm x 50 m, 0.15 mm	12	Roll
7000095564	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 150 mm x 400 m, 0.15 mm	72	Roll
7000008397	xxx	Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 1350 mm x 45 m, 0.15 mm	12	Roll

Single Sided Tapes

Scotch® Filament Tape 890MSR

For applications requiring adhesion to oily surfaces, use our Scotch® Filament Tape 890MSR. This filament-reinforced tape is ideal for bundling and wrapping applications on heavy gauge metals or applications that might become exposed to gas or oil. It offers long-term holding power, very-high tensile strength, and excellent abrasion, moisture and scuff resistance.



- Industrial-strength, filament-reinforced tape resists nicks, abrasion and moisture
- Modified synthetic rubber adhesive provides better adhesion than natural rubber adhesives and bonds well to metals and oily surfaces
- Glass yarn filaments add strength for pipe wrapping applications

Product ID	Part Number	Product Name	MOQ	OU
7000124630	xxx	Scotch® Filament Tape 880MSR, Black, 12 mm x 55 m	72	Roll
7000124631	xxx	Scotch® Filament Tape 880MSR, Black, 18 mm x 55 m, 0.17 mm	48	Roll
7000035410	xxx	Scotch® Filament Tape 880MSR, Clear, 50 mm x 50 m, 0.17 mm	18	Roll
7000095844	xxx	Scotch® Filament Tape 890MSR, Clear, 25 mm x 50 m, 0.17 mm	36	Roll
7000095843	890100	Scotch® Filament Tape 890MSR, Clear, 100 mm x 50 m, 0.2 mm	12	Roll
7000095876	8901550	Scotch® Filament Tape 890MSR, Clear, 1550 m x 50 m, 0.17 mm	3	Roll

Scotch® Filament Tape 898

With a polypropylene backing that resists abrasion, moisture, scuffing and breaks, try Scotch® Filament Tape 898. This filament-reinforced tape is ideal for securing boxes, bundling pipe or reinforcing large bulk containers, Scotch® Filament Tape 898 is a high-strength, reliable and affordable solution for product and package integrity.



- Industrial-strength, filament-reinforced tape resists nicks, abrasion and moisture
- Secure L-clip closure for full overlap (FOL), tuck-type boxes or other non-standard boxes
- Synthetic rubber adhesive bonds easily to most fiberboard, plastics and metal surfaces

Product ID	Part Number	Product Name	MOQ	OU
7000001229	xxx	Scotch® Filament Tape 898, Clear, 24 mm x 55 m, 0.17 mm	36	Roll

Single Sided Tapes

Scotch® Filament Tape Clean Removal 8915

Our Scotch® Filament Tape 8915 Clean Removal is specifically designed to hold appliance parts and other consumer goods in place during manufacturing and shipping. Reinforced with continuous glass-yarn filaments, this high-performance tape provides high adhesion to a wide variety of substrates, but removes cleanly and is stain resistant on some finishes.



- Filament-reinforced tape resists nicks, abrasion and moisture
- Designed for temporary holding applications such as holding appliance parts and other consumer goods together during manufacture and shipping
- Adhesive offers clean removal and stain resistance on some finishes

Product ID	Part Number	Product Name	MOQ	OU
7000059884	xxx	Scotch® Filament Tape Clean Removal 8915, Blue, 18 mm x 55 m, 0.15 mm	48	Roll
7000059885	xxx	Scotch® Filament Tape Clean Removal 8915, Blue, 24 mm x 55 m, 0.15 mm	36	Roll
7000059886	xxx	Scotch® Filament Tape Clean Removal 8915, Blue, 36 mm x 55 m, 0.15 mm	24	Roll
7000059889	xxx	Scotch® Filament Tape Clean Removal 8915, Clear, 144 mm x 330 m, 0.15 mm	10	Roll
7000048604	89151255	Scotch® Filament Tape Clean Removal 8915, Transparent, 12 mm x 55 m, 0.15 mm	72	Roll
7000048605	xxx	Scotch® Filament Tape Clean Removal 8915, Transparent, 18 mm x 55 m, 0.15 mm	1	Roll
7000048606	xxx	Scotch® Filament Tape Clean Removal 8915, Transparent, 24 mm x 55 m, 0.15 mm	36	Roll
7000048608	xxx	Scotch® Filament Tape Clean Removal 8915, Transparent, 48 mm x 55 m, 0.15 mm	24	Roll
7000037570	xxx	Scotch® Filament Tape Clean Removal 8915, Transparent, 768 mm x 55 m, 0.15 mm	64	Roll

Scotch® General Purpose Filament Tape 8956

Scotch® General Purpose Filament Tape 8956 is mainly used for holding boxes together on pallets, salvaging torn and damaged boxes, bundling of light weight products, closing and reinforcing of fiberboard boxes.



- It guarantees a good closure on very large boxes (household appliances for example).
- High tensile strength. Good shear strength.
- Good support for a wide range of applications

Product ID	Part Number	Product Name	MOQ	OU
7000095672	xxx	Scotch® General Purpose Filament Tape 8956, Transparent, 25 mm x 250 m	540	Roll
7000095257	xxx	Scotch® General Purpose Filament Tape 8956, White, 15 mm x 50 m, 0.12 mm		Roll
7000035364	xxx	Scotch® General Purpose Filament Tape 8956, White, 19 mm x 50 m, 0.12 mm	48	Roll
7000035365	xxx	Scotch® General Purpose Filament Tape 8956, White, 25 mm x 50 m, 0.12 mm	36	Roll
7000095277	xxx	Scotch® General Purpose Filament Tape 8956, White, 38 mm x 50 m, 0.12 mm	24	Roll
7000035363	xxx	Scotch® General Purpose Filament Tape 8956, White, 50 mm x 50 m, 0.12 mm	18	Roll
7000062462	xxx	Scotch® General Purpose Filament Tape 8956, White, 50 mm x 50 m, 0.12 mm	12	Roll

Single Sided Tapes

Scotch® High Performance Filament Tape 8981

With a polypropylene backing and glass yarn reinforcement, Scotch® Filament Tape 8981 resists abrasion, moisture, scuffing and breaks. This filament-reinforced tape is ideal for securing boxes, bundling pipe or reinforcing large bulk containers, Scotch® Filament Tape 8981 is a high-strength, reliable and affordable solution for product and package integrity.



- Industrial-strength, filament-reinforced tape resists nicks, abrasion and moisture
- Synthetic rubber adhesive bonds easily to most fibreboard, plastics and metal surfaces
- Glass yarn filaments add strength for box closing, bundling and more

Product ID	Part Number	Product Name	MOQ	OU
7000095574	xxx	Scotch® High Performance Filament Tape 8981, Transparent, 12 mm x 50 m, 0.17 mm	72	Roll
7000095575	xxx	Scotch® High Performance Filament Tape 8981, Transparent, 15 mm x 50 m, 0.17 mm	60	Roll
7000035392	xxx	Scotch® High Performance Filament Tape 8981, Transparent, 19 mm x 50 m, 0.17 mm	48	Roll
7000095576	xxx	Scotch® High Performance Filament Tape 8981, Transparent, 25 mm x 50 m, 0.17 mm	36	Roll
7000095578	xxx	Scotch® High Performance Filament Tape 8981, Transparent, 38 mm x 50 m, 0.17 mm	24	Roll
7000095660	xxx	Scotch® High Performance Filament Tape 8981, Transparent, 38 mm x 150 m, 0.17 mm	8	Roll
7000095577	xxx	Scotch® High Performance Filament Tape 8981, Transparent, 50 mm x 50 m, 0.17 mm	18	Roll

Scotch® Performance Filament Tape 895

High performance backing reinforced with continuous glass yarn across length and width for added strength - resists tearing. For heavy weight packages and overseas, export shipments. Strong backing is abrasion, moisture and scuff resistant.



- Balanced performance, combining high adhesion power and long-term holding power
- Synthetic rubber adhesive has good shear strength to fiberboard for bundling, strapping and reinforcing applications.
- High strength Bi-Directional filament reinforced tape

Product ID	Part Number	Product Name	MOQ	OU
7000095570	xxx	Scotch® Performance Filament Tape 895, Transparent, 12 mm x 50 m, 0.15 mm	72	Roll
7000035390	xxx	Scotch® Performance Filament Tape 895, Transparent, 19 mm x 50 m, 0.15 mm	48	Roll
7000095572	xxx	Scotch® Performance Filament Tape 895, Transparent, 25 mm x 50 m, 0.15 mm	36	Roll
7000095573	xxx	Scotch® Performance Filament Tape 895, Transparent, 38 mm x 50 m, 0.15 mm	24	Roll
7000035391	xxx	Scotch® Performance Filament Tape 895, Transparent, 50 mm x 50 m, 0.15 mm	18	Roll
7000095579	xxx	Scotch® Performance Filament Tape 895, Transparent, 100 mm x 50 m, 0.15 mm	432	Roll
7000095596	xxx	Scotch® Performance Filament Tape 895, Transparent, 150 mm x 250 m, 0.15 mm	10	Roll
7000095785	xxx	Scotch® Performance Filament Tape 895, Transparent, 1550 mm x 50 m, 0.15 mm	30	Roll

Single Sided Tapes

Scotch® Utility Strapping Tape 3741

A utility strapping tape designed to secure, bundle and reinforce goods for intraplant movement and shipping.

- Bond together a wide variety of surfaces on appliances
- Avoid staining substrates with synthetic rubber adhesive
- Cut out breaks or tears – even if nicked or punctured during handling

Product ID	Part Number	Product Name	MOQ	OU
7000095294	xxx	Scotch® Utility Strapping Tape 3741, Ivory, 12 mm x 66 m	96	Roll
7000095266	xxx	Scotch® Utility Strapping Tape 3741, Orange, 15 mm x 66 m, 0.071 mm	96	Roll
7000095299	xxx	Scotch® Utility Strapping Tape 3741, Orange, 19 mm x 66 m, 0.07 mm	96	Roll
7000095314	xxx	Scotch® Utility Strapping Tape 3741, Orange, 25 mm x 66 m, 0.07 mm	72	Roll
7000035397	xxx	Scotch® Utility Strapping Tape 3741, Translucent, 1380 mm x 66 m, 0.07 mm	24	Roll
7000095320	xxx	Scotch® Utility Strapping Tape 3741, Transparent, 19 mm x 66 m, 0.07 mm	96	Roll

Tartan™ Filament Tape 8953

Long life filament adhesive tape. This tape is used for many applications such as securing a pallet package, assembling products, closing and reinforcing packaging cartons. Once glued, the tape retains its adhesive strength under all temperatures, temperatures it will face during transport and storage.

- General use in cardboard reinforcement or light wrapping, maintenance.
- Polypropylene Film, Fibreglass reinforced
- Easily accomplished at room temperature



Product ID	Part Number	Product Name	MOQ	OU
7100197969	xxx	Tartan™ Filament Tape 8953, Clear, 150 mm x 350 m	120	Roll
7000095695	xxx	Tartan™ Filament Tape 8953, Transparent, 12 mm x 50 m, 0.1 mm	72	Roll
7100144053	xxx	Tartan™ Filament Tape 8953, Transparent, 19 mm x 50 m	48	Roll
7000095687	xxx	Tartan™ Filament Tape 8953, Transparent, 19 mm x 50 m, 0.1 mm	48	Roll
7000095688	xxx	Tartan™ Filament Tape 8953, Transparent, 25 mm x 50 m, 0.1 mm	36	Roll
7000095689	xxx	Tartan™ Filament Tape 8953, Transparent, 50 mm x 50 m, 0.1 mm	18	Roll
7000095696	xxx	Tartan™ Filament Tape 8953, Transparent, 75 mm x 50 m, 0.1 mm	12	Roll
7000095694	xxx	Tartan™ Filament Tape 8953, Transparent, 1350 mm x 50 m, 0.1 mm	24	Roll

Single Sided Tapes

Tartan™ Filament Tape 8954

Tartan™ Filament Tape 8954 is a polypropylene filament adhesive tape with strong fiberglass reinforcement (longitudinal and transversal) with synthetic rubber glue with excellent resistance to tearing, abrasion and moisture. Thickness 0,13 mm.




- General maintenance use in cardboard reinforcement or light wrapping
- Polypropylene Film, Fibreglass reinforced
- Easily accomplished at room temperature

Product ID	Part Number	Product Name	MOQ	OU
7000095690	xxx	Tartan™ Filament Tape 8954, Tan, 19 mm x 50 m, 0.125 mm	48	Roll
7000095691	xxx	Tartan™ Filament Tape 8954, Tan, 25 mm x 50 m, 0.125 mm	36	Roll
7000095692	xxx	Tartan™ Filament Tape 8954, Tan, 50 mm x 50 m, 0.125 mm	18	Roll
7000095697	xxx	Tartan™ Filament Tape 8954, Tan, 75 mm x 50 m, 0.125 mm	12	Roll
7000095823	xxx	Tartan™ Filament Tape 8954, Tan, 75 mm x 400 m	144	Roll
7000095750	xxx	Tartan™ Filament Tape 8954, Tan, 100 mm x 100 m	384	Roll
7000095730	xxx	Tartan™ Filament Tape 8954, Tan, 150 mm x 400 m	72	Roll
7100003930	xxx	Tartan™ Filament Tape 8954, Transparent, 1.35 m x 50 m, 0.125 mm	12	Roll
7100109926	xxx	Tartan™ Filament Tape 8954, Transparent, 38 mm x 330 m	288	Each
7000095766	xxx	Tartan™ Filament Tape 8954, Transparent, 50 mm x 660 m, 0.125 mm	6	Roll

Scotch® Film Strapping Tape 8898

Our Scotch® Strapping Tape 8898 is a high performance tape specifically formulated for use in many industries, including appliance, metalworking and general industrial. The tensilized polypropylene film backing features a pressure-sensitive synthetic rubber adhesive that provides high initial adhesion holding power and clean removal from some surfaces, such as metal.



- Removes cleanly and resists stains on some surfaces, such as metal
- Proprietary 3M pressure-sensitive synthetic rubber adhesive is specifically formulated to adhere evenly and bond firmly to long lasting hold
- High strength film backing resists breaking, abrasion, moisture and scuffs and includes proper stiffness for manual or semi-automatic dispensing

Product ID	Part Number	Product Name	MOQ	OU
7000028946	xxx	Scotch® Film Strapping Tape 8898, Blue, 18 mm x 55 m, 0.12 mm	48	Roll
7000048850	xxx	Scotch® Film Strapping Tape 8898, Blue, 24 mm x 55 m, 0.12 mm	36	Roll
7000028947	xxx	Scotch® Film Strapping Tape 8898, Blue, 48 mm x 55 m, 0.12 mm	24	Roll

Single Sided Tapes

Specialty Application Tapes

3M™ Glass Cloth Tape 361

Use 3M™ Glass Cloth Tape 361 for applications requiring high temperature resistance. Our tape has a pressure sensitive silicone adhesive for applications requiring high adhesion, long ageing, good holding power and clean removal. The strong abrasion resistant backing is ideal for use as masking protection in thermal spray operations.

- Protect surfaces and materials from intermittent temperatures up to 288 °C
- Use in aerospace, automotive, military, roofing, specialty vehicles and ship building
- Splice fabrics, sealing panels and use for heavy duty masking, bundling, holding and harness wrapping



Product ID	Part Number	Product Name	MOQ	OU
7100226547	xxx	3M™ Glass Cloth Tape 361, White, 19 mm x 55 m, 0.16 mm	64	Roll
7000047441	xxx	3M™ Glass Cloth Tape 361, White, 19 mm x 55 m, 0.17 mm	48	Roll
7000047442	xxx	3M™ Glass Cloth Tape 361, White, 25 mm x 55 m, 0.17 mm	36	Roll
7000050071	xxx	3M™ Glass Cloth Tape 361, White, 25 mm x 55 m, 0.17 mm	9	Roll
7100020649	xxx	3M™ Glass Cloth Tape 361, White, 50 mm x 55 m, 0.17 mm	1	Roll
7000035829	xxx	3M™ Glass Cloth Tape 361, White, 51 mm x 55 m, 0.17 mm	24	Roll
7000029149	xxx	3M™ Glass Cloth Tape 361, White, 610 mm x 55 m, 0.17 mm	1	Roll

3M™ High Temperature Aluminium Foil/Glass Cloth Tape 363

3M™ High Temperature Aluminum Foil/Glass Cloth Tape 363 is very strong and flexible and designed for heat shielding in aerospace, automotive and industrial applications. Our tape combines foil backing with glass cloth tape and pressure sensitive silicone adhesive.

- Can easily be die-cut into special sizes or shapes
- Light, flexible construction – easily applied to a variety of irregular shapes
- Performs continuously from -54 °C to 316 °C



Product ID	Part Number	Product Name	MOQ	OU
7000048939	3631233	3M™ High Temperature Aluminium Foil/Glass Cloth Tape 363, Silver, 12 mm x 32 m, 0.19 mm	72	Roll
7000048751	xxx	3M™ High Temperature Aluminium Foil/Glass Cloth Tape 363, Silver, 19 mm x 33 m, 0.19 mm	48	Roll
7000080479	xxx	3M™ High Temperature Aluminium Foil/Glass Cloth Tape 363, Silver, 25 mm x 33 m, 0.19 mm	1	Roll
7100035736	xxx	3M™ High Temperature Aluminium Foil/Glass Cloth Tape 363, Silver, 50 mm x 33 m, 0.19 mm	4	Roll
7000028867	xxx	3M™ High Temperature Aluminium Foil/Glass Cloth Tape 363, Silver, 51 mm x 33 m, 0.19 mm	24	Roll
7000070307	xxx	3M™ High Temperature Aluminium Foil/Glass Cloth Tape 363, Silver, 150 mm x 33 m, 0.19 mm	1	Roll

Single Sided Tapes

3M™ High Temperature Aluminium Foil/Glass Cloth Tape 363L

3M™ High Temperature Aluminum Foil/Glass Cloth Tape 363L (lined version of 363) is very strong and flexible and designed for heat shielding in aerospace, automotive and industrial applications. Our tape combines foil backing with glass cloth tape and pressure sensitive silicone adhesive.

- Can easily be die-cut into special sizes or shapes
- Light, flexible construction – easily applied to a variety of irregular shapes
- Performs continuously from -54 °C to 316 °C



Product ID	Part Number	Product Name	MOQ	OU
7000147746	363L914	3M™ High Temperature Aluminium Foil/Glass Cloth Tape 363L, Silver, 914 mm x 33 m	1	Roll

3M™ Flame Retardant Sealing Tape 398FR

Our 3M™ Glass Cloth Tape 398FR has an acrylic adhesive for many applications requiring high adhesion, an abrasion-resistant backing and flame retardant properties.

- Abrasion resistance and good temperature resistance helps reduce failure due to wear
- Acrylic adhesive has excellent long-ageing properties ideal for many permanent applications
- High conformability allows tape to bond over a variety of difficult textures and uneven or curved surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100003056	xxx	3M™ Flame Retardant Sealing Tape 398FR, White, 51 mm x 33 m, 0.18 mm	24	Roll
7000001301	xxx	3M™ Flame Retardant Sealing Tape 398FR, White, 76 mm x 33 m, 0.18 mm	12	Roll

3M™ Venting Tape 3294

3M™ Venting Tape 3294 is a pink non-woven, synthetic backing with a strip-coated low-tack pressure sensitive acrylic adhesive for use in various venting applications requiring high outgassing rates.

- Features a unique non-woven conformable backing that has high air/gas permeability
- Meets most outgassing requirements for foam-in-place insulation processes
- Adhesive is strip-coated so uncoated areas have higher permeability to help minimize foaming voids



Product ID	Part Number	Product Name	MOQ	OU
7000048712	xxx	3M™ Venting Tape 3294, Pink, 51 mm x 33 m, 0.13 mm	1	Roll

3M™ Venting Tape 394

Our 3M™ Vent Tape 394 features a unique, non-woven synthetic backing with high air/gas permeability, good burst strength and solids barrier for minimal voids and less clean up.

- Features a unique non-woven porous backing that has high air/gas permeability
- Meets most outgassing requirements for foam-in-place insulation processes
- Pressure sensitive adhesive holds strong to a wide variety of surfaces



Product ID	Part Number	Product Name	MOQ	OU
7000048566	xxx	3M™ Venting Tape 394, White, 50 mm x 33 m, 0.13 mm	24	Roll

Single Sided Tapes

Masking Tapes

3M™ General Purpose Masking Tape 101E

3M™ Value Masking Tape 101E is a smooth, multi-purpose crepe paper tape for room temperature indoor light-duty applications. It is ideal for non-critical paint masking, but also bundling, sealing, attaching, and other applications. Chamois color, rubber adhesive, thickness 0,12mm, this tape is designed for general use.



- Good initial tack to a wide variety of surfaces in different applications
- Good initial tack to a wide variety of surfaces
- For light-duty applications

Product ID	Part Number	Product Name	MOQ	OU
7100260268	101E/1845	3M™ General Purpose Masking Tape 101E, Beige, 18 mm x 45 m, Roll labelled	48	Roll
7100135739	xxx	3M™ General Purpose Masking Tape 101E, Beige, 18 mm x 50 m	48	Roll
7100260269	101E/2445	3M™ General Purpose Masking Tape 101E, Beige, 24 mm x 45 m, Roll labelled	36	Roll
7100135737	xxx	3M™ General Purpose Masking Tape 101E, Beige, 24 mm x 50 m	36	Roll
7100135748	101E/30	3M™ General Purpose Masking Tape 101E, Beige, 30 mm x 50 m	32	Roll
7100260270	101E/3645	3M™ General Purpose Masking Tape 101E, Beige, 36 mm x 45 m, Roll labelled	24	Roll
7100135761	101E/36	3M™ General Purpose Masking Tape 101E, Beige, 36 mm x 50 m	24	Roll
7100260271	101E/4845	3M™ General Purpose Masking Tape 101E, Beige, 48 mm x 45 m, Roll labelled	24	Roll
7100135720	xxx	3M™ General Purpose Masking Tape 101E, Beige, 48 mm x 50 m	24	Roll
7100044325	xxx	3M™ General Purpose Masking Tape 101E, Beige, 72 mm x 50 m	16	Roll
7100065027	xxx	3M™ General Purpose Masking Tape 101E, Beige, 100 mm x 50 m	12	Roll
7100053516	xxx	3M™ General Purpose Masking Tape 101E, Beige, 1610 mm x 50 m	3	Roll

3M™ General Purpose Masking Tape 201E

The 3M™ General Purpose Masking Tape 201E is a premium-quality masking tape used for short-term paint masking, fixing, bundling, holding, sealing, and other applications up to a temperature of 80°C for one hour. Chamois color, rubber adhesive, thickness 0,135mm.



- Good instant adhesion and holding power that resists lifting or curling
- Good solvent and moisture resistance, for indoor use
- Conformable tape, does not tear when unfolding

Product ID	Part Number	Product Name	MOQ	OU
7100196060	xxx	3M™ General Purpose Masking Tape 201E, Beige, 18 mm x 50 m	48	Roll
7100195952	xxx	3M™ General Purpose Masking Tape 201E, Beige, 24 mm x 50 m	36	Roll
7100196064	201E/30	3M™ General Purpose Masking Tape 201E, Beige, 30 mm x 50 m	32	Roll
7100196061	201E/36	3M™ General Purpose Masking Tape 201E, Beige, 36 mm x 50 m	24	Roll
7100195888	201E48	3M™ General Purpose Masking Tape 201E, Beige, 48 mm x 50 m	24	Roll
7100044328	xxx	3M™ General Purpose Masking Tape 201E, Beige, 72 mm x 50 m	16	Roll
7100092814	xxx	3M™ General Purpose Masking Tape 201E, Beige, 100 mm x 50 m	12	Roll
7100053515	xxx	3M™ General Purpose Masking Tape 201E, Beige, 1610 mm x 50 m	3	Roll

Single Sided Tapes

3M™ Performance Industrial Masking Tape 301E

301E Masking Tape is a thick crepe paper tape for industrial applications with good water resistance.

- Its thick support facilitates the realization of lines
- For indoor use
- Resistant to solvents and moisture



Product ID	Part Number	Product Name	MOQ	OU
7100042898	xxx	3M™ Performance Industrial Masking Tape 301E, Beige, 18 mm x 50 m	48	Roll
7100042901	xxx	3M™ Performance Industrial Masking Tape 301E, Beige, 24 mm x 50 m	36	Roll
7100042902	xxx	3M™ Performance Industrial Masking Tape 301E, Beige, 36 mm x 50 m	24	Roll
7100042903	301E48	3M™ Performance Industrial Masking Tape 301E, Beige, 48 mm x 50 m	20	Roll
7100044391	xxx	3M™ Performance Industrial Masking Tape 301E, Beige, 72 mm x 50 m	12	Roll
7100042956	xxx	3M™ Performance Industrial Masking Tape 301E, Beige, 1526 mm x 50 m	9	Roll

3M™ Performance Masking Tape 401E

401E Masking Tape is a smooth crepe paper tape with high tensile strength. Buff color, rubber adhesive, thickness 0.170 mm. It may be exposed to temperatures up to 140 ° C. Ideal in painting baking processes.

- Ideal combinations of adhesion and resistance to high temperatures
- Ideal in painting baking processes
- It may be exposed to temperatures up to 140 ° C



Product ID	Part Number	Product Name	MOQ	OU
7100042899	xxx	3M™ Performance Masking Tape 401E, Brown, 18 mm x 50 m	48	Roll
7100042900	xxx	3M™ Performance Masking Tape 401E, Brown, 24 mm x 50 m	36	Roll
7100042904	xxx	3M™ Performance Masking Tape 401E, Brown, 36 mm x 50 m	24	Roll
7100042954	xxx	3M™ Performance Masking Tape 401E, Brown, 48 mm x 50 m	20	Roll
7100044392	xxx	3M™ Performance Masking Tape 401E, Brown, 72 mm x 50 m	12	Roll
7100042957	xxx	3M™ Performance Masking Tape 401E, Brown, 1526 mm x 50 m	9	Roll

Single Sided Tapes

3M™ High Temperature Industrial Masking Tape 501E

3M™ High Performance Masking Tape 501E is a buff-colored crepe paper tape coated with a 150 mm thick rubber adhesive.

- High temperature tape for demanding industrial applications
- Resists high temperatures for indoor use
- The most powerful paperback masking tape



Product ID	Part Number	Product Name	MOQ	OU
7100098737	xxx	3M™ High Performance Industrial Masking Tape 501E, Beige, 100 mm x 50 m	8	Roll
7100042890	xxx	3M™ High Temperature Industrial Masking Tape 501E, Beige, 18 mm x 50 m	48	Roll
7100042893	xxx	3M™ High Temperature Industrial Masking Tape 501E, Beige, 24 mm x 50 m	36	Roll
7100042894	xxx	3M™ High Temperature Industrial Masking Tape 501E, Beige, 36 mm x 50 m	24	Roll
7100042895	xxx	3M™ High Temperature Industrial Masking Tape 501E, Beige, 48 mm x 50 m	20	Roll
7100042982	xxx	3M™ High Temperature Industrial Masking Tape 501E, Beige, 72 mm x 50 m	12	Roll
7100042958	xxx	3M™ High Temperature Industrial Masking Tape 501E, Beige, 1526 mm x 50 m	9	Roll

Scotch® Crepe Masking Tape 202

Scotch® Crepe Masking Tape 202 is a trustworthy, go-to tape tape designed with a heavy, thick, crepe paper backing. Engineered with a natural rubber adhesive, this everyday tape features good, instant adhesion and strong holding power, which makes it a favourite among teachers for their classroom settings.

- Heavy, thick, crepe paper backing provides good paint lines
- Natural rubber adhesive offers good, instant adhesion
- Adhesive offers excellent holding power for reliable performance



Product ID	Part Number	Product Name	MOQ	OU
7100041928	xxx	Scotch® Crepe Masking Tape 202, Beige, 18 mm x 50 m, 0.17 mm	48	Roll
7100044183	xxx	Scotch® Crepe Masking Tape 202, Beige, 24 mm x 50 m, 0.17 mm	36	Roll
7000088544	xxx	Scotch® Crepe Masking Tape 202, Beige, 30 mm x 50 m, 0.17 mm	32	Roll
7100044184	xxx	Scotch® Crepe Masking Tape 202, Beige, 36 mm x 50 m, 0.17 mm	24	Roll
7100044185	xxx	Scotch® Crepe Masking Tape 202, Beige, 48 mm x 50 m, 0.17 mm	20	Roll
7100044186	xxx	Scotch® Crepe Masking Tape 202, Beige, 72 mm x 50 m, 0.17 mm	12	Roll

Single Sided Tapes

Scotch® Fine Line Tape 218

Scotch® Fine Line Tape 218 is a high-performance polypropylene plastic tape that has both a low profile and high adhesion for use in painting long straight lines and sweeping curves where a crisp, sharp paint line is desired. It is often used as a layout tape for high value multi-Colour and custom painted graphics.



- Thin tape provides excellent Colour line separation
- Proven excellent for painting long straight lines and smooth curves
- Resistant to most solvents and moisture

Product ID	Part Number	Product Name	MOQ	OU
7000050052	xxx	Scotch® Fine Line Tape 218, Green, 1.58 mm x 55 m, 0.127 mm, PN6306	12	Roll
7000048455	xxx	Scotch® Fine Line Tape 218, Green, 3.2 mm x 55 m, 0.13 mm, PN6300	12	Roll
7000048456	xxx	Scotch® Fine Line Tape 218, Green, 6 mm x 55 m, 0.127 mm, PN6301	12	Roll
7000028866	xxx	Scotch® Fine Line Tape 218, Green, 6.4 mm x 55 m, 0.127 mm	144	Roll
7000048457	xxx	Scotch® Fine Line Tape 218, Green, 9 mm x 55 m, 0.127 mm, PN6302	12	Roll
7000048458	2181255	Scotch® Fine Line Tape 218, Green, 12 mm x 55 m, 0.127 mm, PN6303	12	Roll
7000048422	xxx	Scotch® Fine Line Tape 218, Green, 12.7 mm x 55 m, 0.127 mm	72	Roll
7000048423	xxx	Scotch® Fine Line Tape 218, Green, 19 mm x 55 m, 0.127 mm	48	Roll
7000048459	21819IW	Scotch® Fine Line Tape 218, Green, 19 mm x 55 m, 0.127 mm, PN6305	12	Roll
7000001161	xxx	Scotch® Fine Line Tape 218, Green, 25 mm x 55 m, 0.127 mm	36	Roll
7000028860	21850	Scotch® Fine Line Tape 218, Green, 50 mm x 55 m, 0.127 mm	24	Roll

Scotch® Paint Masking Tape 231/231A

Scotch® Paint Masking Tape 231/231A is a premium high-performance crepe paper masking tape designed to meet masking needs in most industrial painting situations, including the use of bake cycles. Our smooth masking tape embodies all the features that are desirable in a paint masking tape and designed specifically for the professional painter.



- Rubber adhesive provides instant adhesion and resists lifting or curling for sharp paint lines
- Smooth mini-crepe paper backing conforms and maintains integrity when formed around a corner
- Backing is easy to tear resists slivering and provides one piece removal

Product ID	Part Number	Product Name	MOQ	OU
7000088515	328228	Scotch® Paint Masking Tape 231/231A, Tan, 36 mm x 55 m, 0.19 mm	24	Roll
7000088516	xxx	Scotch® Paint Masking Tape 231/231A, Tan, 48 mm x 55 m, 0.19 mm	24	Roll
7000088517	xxx	Scotch® Paint Masking Tape 231/231A, Tan, 72 mm x 55 m, 0.19 mm	12	Roll

Single Sided Tapes

3M™ High Performance Masking Tape 232

Scotch® High Performance Masking Tape 232 produces sharp paint lines in medium temperature paint bake operations and provides clean removal, even on difficult to remove from surfaces. The thick crepe paper backing contains a solvent-resistant saturant that helps resist paint bleed-through against latex and oil-based paints.



- Rubber adhesive provides instant adhesion and resists lifting or curling for sharp paint lines
- Crepe paper backing conforms and maintains integrity when formed around a corner
- Backing is easy to tear, resists slivering, and provides one piece removal

Product ID	Part Number	Product Name	MOQ	OU
7100041614	xxx	3M™ High Performance Masking Tape 232, Beige, 24 mm x 50 m	36	Roll
7100044285	xxx	3M™ High Performance Masking Tape 232, Beige, 48 mm x 50 m	20	Roll
7000001272	xxx	3M™ High Performance Masking Tape 232, Beige, 1490 mm x 55 m	1	Roll

Scotch® Performance Masking Tape 244

Scotch® Performance Masking Tape 244 is provided with a yellow smooth paper backing and a 0.085 mm thick synthetic adhesive. This tape is particularly resistant to UV, and is waterproof. It has a good temperature resistance (100 ° C).



- Designed with a flat paper backing with synthetic adhesive, this tape offers a good solvent and water resistance and a good paint anchorage
- Adhesive transfer resistance and sunlight stability. a good temperature resistance (100 ° C)
- It offers a good paint line, good handling, good paint flaking resistance and clean removal

Product ID	Part Number	Product Name	MOQ	OU
7100046034	xxx	Scotch® Performance Masking Tape 244, Gold, 18 mm x 50 m	48	Roll
7100046035	xxx	Scotch® Performance Masking Tape 244, Gold, 24 mm x 50 m	36	Roll
7100046036	xxx	Scotch® Performance Masking Tape 244, Gold, 24 mm x 100 m	48	Roll
7100146753	24430	Scotch® Performance Masking Tape 244, Gold, 30 mm x 50 m	32	Roll
7100046037	xxx	Scotch® Performance Masking Tape 244, Gold, 36 mm x 50 m	24	Roll
7100048317	xxx	Scotch® Performance Masking Tape 244, Gold, 36 mm x 100 m	32	Roll
7100046038	xxx	Scotch® Performance Masking Tape 244, Gold, 48 mm x 50 m	24	Roll
7100046039	xxx	Scotch® Performance Masking Tape 244, Gold, 48 mm x 100 m	24	Roll
7000096009	xxx	Scotch® Performance Masking Tape 244, Gold, 1250 mm x 50 m	24	Roll

Single Sided Tapes

Scotch® Low Adhesion Masking Tape 1104

Scotch® Masking Tape 1104 has been designed for applications where less aggressive adhesion is required. It is used in most masking operations and cleanly removed after a cooking time of 45 minutes at 120 ° C.



- It allows a sharp demarcation, good masking in the curves.
- Perfectly suited for critical surfaces like aluminum, or anodized titanium, wood and wallpaper, lacquered surfaces or other delicate surfaces.
- High temperature resistance

Product ID	Part Number	Product Name	MOQ	OU
7100044284	xxx	Scotch® Low Adhesion Masking Tape 1104, Beige, 24 mm x 50 m	36	Roll
7100044286	xxx	Scotch® Low Adhesion Masking Tape 1104, Beige, 48 mm x 50 m	20	Roll

3M™ High Performance Masking Tape 2693

Scotch® High Performance Masking Tape 2693 is a smooth, heavy-duty, mini-crepe paper masking tape well suited to most paint masking operations. Designed for automotive, truck and bus applications where very aggressive room temperature and high temperature holding is required.



- High holding power resists lifting, resulting in clean sharp paint lines
- Provides high performance for paint masking with high solids paints and urethane clear coats used in the transportation industry
- Smooth crepe paper backing conforms and maintains integrity when formed around a corner

Product ID	Part Number	Product Name	MOQ	OU
7000088347	269348	Scotch® High Performance Masking Tape 2693, Tan, 48 mm x 55 m	24	Roll
7000088390	xxx	Scotch® High Performance Masking Tape 2693, Tan, 72 mm x 55 m, 0.20 mm	12	Roll

Scotch® Masking Tape 2800

Scotch® Masking Tape 2800 is designed especially for masking thermoplastic olefin (TPO) surfaces and for bake cycles that reach up to 149°C for 30 minutes. It is compatible with most industrial paints and painting processes and removes cleanly for up to 7 days outdoors with no residue, tracking or bleeding.



- Fine line paint masking designed especially for thermoplastic olefin (TPO) surfaces
- Formulated for bake cycles up to 149°C for 30 minutes
- Provides sharp lines and removes cleanly with no residue, tracking or bleeding; resists ghosting

Product ID	Part Number	Product Name	MOQ	OU
7100280536	2800.12	Scotch® Masking Tape 2800, Blue, 12 mm x 50 m	96	Roll
7100280538	28001950	Scotch® Masking Tape 2800, Blue, 19 mm x 50 m	64	Roll
7100281475	28002550	Scotch® Masking Tape 2800, Blue, 25 mm x 50 m	48	Roll

Single Sided Tapes

Scotch® High Temperature Fine Line Tape 4735

Scotch® High Temperature Fine Line Tape 4735 is a highly conformable tape used to achieve sharp contrast and color separation while painting on highly contoured, curved and shaped surfaces. It has proven successful in high-temperature painting applications requiring a highly conformable tape.

- Mask where fine, critical paint break lines are required
- Natural rubber adhesive for good instant adhesion.
- Easy tear, pressure sensitive

Product ID	Part Number	Product Name	MOQ	OU
7000048652	473519	Scotch® High Temperature Fine Line Tape 4735, Orange, 19 mm x 33 m, 0.137 mm	48	Roll
7000048833	xxx	Scotch® High Temperature Fine Line Tape 4735, Orange, 25 mm x 33 m, 0.137 mm	36	Roll

Scotch® High Temperature Fine Line Tape 4737TL

Scotch® High Temperature Fine Line Tape 4737TL is a conformable tape used to achieve sharp paint lines and color separation for curves and straight lines. It has proven successful in high-temperature painting applications requiring a conformable tape.

- The conformable backing is designed for uniform stretching to help create better paint lines.



Product ID	Part Number	Product Name	MOQ	OU
7000048634	xxx	Scotch® High Temperature Fine Line Tape 4737T, Translucent Blue, 6 mm x 33 m, 0.137 mm	144	Roll
7000048629	xxx	Scotch® High Temperature Fine Line Tape 4737T, Translucent Blue, 12.7 mm x 33 m, 0.137 mm	72	Roll
7000048628	xxx	Scotch® High Temperature Fine Line Tape 4737T, Translucent Blue, 19 mm x 33 m, 0.137 mm	48	Roll
7000048627	4737T25	Scotch® High Temperature Fine Line Tape 4737T, Translucent Blue, 25 mm x 33 m, 0.14 mm	36	Roll
7000048610	4737T50	Scotch® High Temperature Fine Line Tape 4737T, Translucent Blue, 50 mm x 33 m, 0.137 mm	24	Roll
7010337024	xxx	Scotch® High Temperature Fine Line Tape 4737T, Transparent blue, 1220 mm x 33 m	4	Roll

Single Sided Tapes

3M™ Aqua Washi Tape 2899

The masking tape 2899 is a blue coloured masking tape with a thin flat Washi paper backing and an acrylic adhesive, well suited for general paint masking. Its thickness is 0,081mm and its Tensile strength is 30,7 N/cm. Temp resistance is 150C for 1h on stainless steel.

- Designed with a thin flexible backing for consistently sharp paint edges on both curved and straight paint lines
- Firm acrylic adhesive afford easy removal and a good temperature resistance
- Easy to tear by hand, with additives incorporated into the backing to prevent paint flaking



Product ID	Part Number	Product Name	MOQ	OU
7100193857	28991250	3M™ Aqua Washi Tape 2899, Blue, 1250 mm x 50 m	24	Roll
7100055250	xxx	3M™ Aqua Washi Tape 2899, Blue, 18 mm x 50 m	48	Roll
7100055239	xxx	3M™ Aqua Washi Tape 2899, Blue, 24 mm x 50 m	36	Roll
7100055251	xxx	3M™ Aqua Washi Tape 2899, Blue, 30 mm x 50 m	32	Roll
7100055252	xxx	3M™ Aqua Washi Tape 2899, Blue, 36 mm x 50 m	24	Roll
7100055238	xxx	3M™ Aqua Washi Tape 2899, Blue, 48 mm x 50 m	24	Roll

3M™ Outdoor Masking and Stucco Tape 5959

3M™ Outdoor Masking and Stucco Tape 5959 is built strong, holds strong, and removes clean, even up to 90 days after application. Its unique, polyethylene backing, laid over a dense cloth scrim, is strong enough to pull through spatter from stucco, Exterior Insulation and Finishing Systems (EIFS) and other heavy coatings.

- Bonds to many surfaces, yet removes cleanly up to 90 days after application
- Strong backing pulls through spatter from stucco and Exterior Insulation and Finishing Systems (EIFS) without tearing
- High visibility tape is easily identifiable



Product ID	Part Number	Product Name	MOQ	OU
7000124742	xxx	3M™ Outdoor Masking and Stucco Tape 5959, Red, 48 mm x 41.1 m, 0.305 mm	12	Roll

Single Sided Tapes

Paper Masking Tapes

3M™ Performance Flatback Tape 2525

3M™ Performance Flatback Tape 2525 is a reliable tape ideal for splicing and paint masking applications where adhesion in high temperature bake cycles is necessary. This tough tape features a dependable smooth paper backing capable of resisting high temperatures as well as moisture, and can be torn by hand for easy application. It is available in orange for improved visibility.

- Designed for high temperature splicing and paint masking
- Can withstand a bake cycle up to 300°F/149°C for up to one hour
- Natural rubber adhesive offers dependable tack and holding power



Product ID	Part Number	Product Name	MOQ	OU
7100016326	252524	3M™ Performance Flatback Tape 2525, Orange, 24 mm x 55 m, 0.24 mm	36	Roll
7000088507	xxx	3M™ Performance Flatback Tape 2525, Orange, 36 mm x 55 m	24	Roll
7000088508	xxx	3M™ Performance Flatback Tape 2525, Orange, 48 mm x 55 m, 0.24 mm	24	Roll

Scotch® Flatback Masking Tape 250

Scotch® Flatback Masking Tape 250 is used as a quality control paint adhesion testing tape. It features high peel adhesion and a strong flatback paper backing. It is ideal for bundling and wrapping applications.

- Clean removal from paint, plating and powder coatings
- Aggressive, pressure sensitive adhesive provides instant adhesion
- Special flatback paper backing resists tearing and breakage



Product ID	Part Number	Product Name	MOQ	OU
7000001488	xxx	Scotch® Flatback Masking Tape 250, Tan, 25 mm x 55 m, 0.15 mm	36	Roll

Single Sided Tapes

Cloth & Duct Tapes

3M™ Super Duty Duct Tape DT17

Constructed of polyethylene film laminated to cloth with a synthetic/ natural rubber adhesive blend , this very thick and strong tape resists curling and tears off the roll cleanly even when used in the most demanding jobs. The 3M™ Super Duty Duct Tape DT17 is designed to provide maximum-strength and is a long-lasting solution for high stress applications.



- Ultra-thick, water-resistant backing resists wear and abrasion while still tearing easily by hand
- Aggressive rubber adhesive grips instantly to a wide variety of surfaces, including metal, glass, plastic, and sealed concrete
- Tightly woven scrim provides high tensile strength, which is ideal for bundling applications

Product ID	Part Number	Product Name	MOQ	OU
7100158390	DT17BL4833IW	3M™ Super Duty Duct Tape DT17, Black, 48 mm x 32 m, 0.43 mm, Individually Wrapped	24	Roll

3M™ Heavy Duty Duct Tape DT11

Constructed of polyethylene film laminated to cloth with a synthetic/ natural rubber adhesive blend , this tough tape resists curling and tears off the roll cleanly for a variety of applications. The 3M™ Heavy Duty Duct Tape DT11 is designed to provide a reliable solution for everyday challenges and adheres to numerous substrates, including plastic.



- Versatile with good hold for everyday use in challenging applications
- Sticks immediately and stays on irregular surfaces without lifting, even on most plastics
- Water-resistant polyethylene backing resists wear and light abrasion

Product ID	Part Number	Product Name	MOQ	OU
7100158377	DT11BL4855IW	3M™ Heavy Duty Duct Tape DT11, Black, 48 mm x 55 m, 0.28 mm, Individually Wrapped	24	Roll
7100158346	DT11SI4855IW	3M™ Heavy Duty Duct Tape DT11, Silver, 48 mm x 55 m, 0.28 mm, Individually Wrapped	24	Roll

3M™ All Purpose Duct Tape DT8

Constructed of polyethylene film laminated to cloth with a synthetic/ natural rubber adhesive blend , this aggressive tape resists curling and tears off the roll cleanly even when used in challenging jobs. The 3M™ All Purpose Duct Tape DT8 is designed to provide a versatile, conformable, and quick stick solution for demanding applications.



- Aggressive natural rubber adhesive provides instant adhesion to a wide variety of surfaces, including metal, glass, plastic, and sealed concrete
- Woven cloth scrim allows tape to tear easily by hand and provides ease of application and handling
- Conformable backing is good for use on contoured surfaces

Product ID	Part Number	Product Name	MOQ	OU
7100174105	DT8BL4822IW	3M™ All Purpose Duct Tape DT8, Black, 48 mm x 23 m, 0.2 mm, Individually Wrapped	24	Roll
7100174104	DT8BL4855IW	3M™ All Purpose Duct Tape DT8, Black, 48 mm x 55 m, 0.2 mm, Individually Wrapped	24	Roll
7100158365	DT8SI4822IW	3M™ All Purpose Duct Tape DT8, Silver, 48 mm x 23 m, 0.2 mm, Individually Wrapped	24	Roll
7100158345	DT8SI4855IW	3M™ All Purpose Duct Tape DT8, Silver, 48 mm x 55 m, 0.2 mm, Individually Wrapped	24	Roll

Single Sided Tapes

3M™ Performance Plus Duct Tape 8979

3M™ Performance Plus Duct Tape 8979 has a unique construction that allows for both permanent and temporary applications indoor and outdoor. It is removable with little or no adhesive residue from most opaque surfaces up to 6 months after application.




- Resists UV, sunlight, and weather to stay on for up to one year without deterioration
- Special adhesive sticks immediately and reliably long-term to most surfaces
- Protects against light abrasion including overspray from bead blasting, sand blasting, and shot peening

Product ID	Part Number	Product Name	MOQ	OU
7000001329	xxx	3M™ Performance Plus Duct Tape 8979, Blue, 48 mm x 22.8 m, 0.33 mm	12	Roll
7000001330	xxx	3M™ Performance Plus Duct Tape 8979, Blue, 48 mm x 55 m, 0.33 mm	24	Roll
7000049207	xxx	3M™ Performance Plus Duct Tape 8979, Blue, 96 mm x 55 m, 0.33 mm	12	Roll
7100108728	xxx	3M™ Performance Plus Duct Tape 8979, Olive, 25 mm x 55 m, 0.33 mm	36	Roll
7100108727	xxx	3M™ Performance Plus Duct Tape 8979, Olive, 100 mm x 55 m, 0.33 mm	12	Roll
7100108708	xxx	3M™ Performance Plus Duct Tape 8979, Olive, 150 mm x 55 m, 0.33 mm	8	Roll

3M™ Performance Plus Duct Tape 8979N

Seal, hold and protect with the highly specialised 3M™ Performance Plus Duct Tape 8979N. Our tape is ideally suited for demanding applications in the nuclear power plant, ship building, and steel fabrication industries.



- Resists UV, sunlight, and weather to stay on for up to one year without deterioration
- Use as tape 8979, but also suitable for nuclear applications.
- Remove cleanly from most opaque surfaces

Product ID	Part Number	Product Name	MOQ	OU
7000049014	xxx	3M™ Performance Plus Duct Tape 8979N, Nuclear, Red, 48 mm x 55 m, 0.307 mm	24	Roll

Single Sided Tapes

3M™ Extra Heavy Duty Duct Tape 389

A polyethylene treated rayon cloth backing with synthetic rubber adhesive.

- Waterproof backing has good conformability and easy tear.
- Available in black or silver
- Good conformability



Product ID	Part Number	Product Name	MOQ	OU
7000111478	xxx	3M™ Extra Heavy Duty Duct Tape 389, Black, 19 mm x 50 m	48	Roll
7000111459	xxx	3M™ Extra Heavy Duty Duct Tape 389, Black, 25 mm x 50 m	36	Roll
7000111460	xxx	3M™ Extra Heavy Duty Duct Tape 389, Black, 38 mm x 50 m	24	Roll
7000111461	xxx	3M™ Extra Heavy Duty Duct Tape 389, Black, 50 mm x 50 m	24	Roll
7000111462	xxx	3M™ Extra Heavy Duty Duct Tape 389, Black, 75 mm x 50 m	12	Roll
7000111463	xxx	3M™ Extra Heavy Duty Duct Tape 389, Black, 100 mm x 50 m	8	Roll
7000111477	xxx	3M™ Extra Heavy Duty Duct Tape 389, Blue, 50 mm x 50 m	24	Roll
7000111490	xxx	3M™ Extra Heavy Duty Duct Tape 389, Blue, 50 mm x 50 m	24	Roll
7000111487	xxx	3M™ Extra Heavy Duty Duct Tape 389, Green, 50 mm x 50 m	24	Roll
7000111474	xxx	3M™ Extra Heavy Duty Duct Tape 389, Olive, 38 mm x 50 m	24	Roll
7000111473	xxx	3M™ Extra Heavy Duty Duct Tape 389, Olive, 38 mm x 50 m	24	Each
7000111483	xxx	3M™ Extra Heavy Duty Duct Tape 389, Red, 19 mm x 50 m	48	Roll
7000111484	38925R	3M™ Extra Heavy Duty Duct Tape 389, Red, 25 mm x 50 m	1	Roll
7000111485	xxx	3M™ Extra Heavy Duty Duct Tape 389, Red, 38 mm x 50 m	24	Roll
7000111486	xxx	3M™ Extra Heavy Duty Duct Tape 389, Red, 50 mm x 50 m	24	Roll
7000111488	xxx	3M™ Extra Heavy Duty Duct Tape 389, Red, 100 mm x 50 m	8	Roll
7000111480	xxx	3M™ Extra Heavy Duty Duct Tape 389, Silver, 19 mm x 50 m	1	Roll
7000111468	xxx	3M™ Extra Heavy Duty Duct Tape 389, Silver, 25 mm x 50 m	36	Roll
7000111469	xxx	3M™ Extra Heavy Duty Duct Tape 389, Silver, 38 mm x 50 m	24	Roll
7000111470	xxx	3M™ Extra Heavy Duty Duct Tape 389, Silver, 50 mm x 50 m	24	Roll
7000111471	xxx	3M™ Extra Heavy Duty Duct Tape 389, Silver, 75 mm x 50 m	1	Roll
7000111472	xxx	3M™ Extra Heavy Duty Duct Tape 389, Silver, 100 mm x 50 m	8	Roll
7000111479	xxx	3M™ Extra Heavy Duty Duct Tape 389, White, 19 mm x 50 m	1	Roll
7000111464	xxx	3M™ Extra Heavy Duty Duct Tape 389, White, 25 mm x 50 m	36	Roll
7000111465	xxx	3M™ Extra Heavy Duty Duct Tape 389, White, 38 mm x 50 m	24	Roll
7000111466	xxx	3M™ Extra Heavy Duty Duct Tape 389, White, 50 mm x 50 m	24	Roll
7000111467	xxx	3M™ Extra Heavy Duty Duct Tape 389, White, 100 mm x 50 m	1	Roll
7000111475	xxx	3M™ Extra Heavy Duty Duct Tape 389, Yellow, 25 mm x 50 m	36	Roll
7000111476	xxx	3M™ Extra Heavy Duty Duct Tape 389, Yellow, 50 mm x 50 m	24	Roll

Single Sided Tapes

3M™ Vinyl Duct Tape 3903i

3M™ Vinyl Duct Tape 3903i is a hand-tearable general purpose tape with a rubber adhesive and embossed vinyl backing. This tape is ideal for a variety of purposes including temporary repairs, identification, securing wiring, bundling, sealing, holding, protecting, and other jobs including applications requiring moisture resistance.

- Rubber adhesive sticks fast and stays on many surfaces, even irregular surfaces
- Embossed vinyl backing providing high elongation of 115%
- Temperature resistance up to 93°C



Product ID	Part Number	Product Name	MOQ	OU
7100263682	3903BK50	3M™ Vinyl Duct Tape 3903i, Black, 50 mm x 50 m	24	Roll
7100263680	390350	3M™ Vinyl Duct Tape 3903i, Silver, 50 mm x 50 m	24	Roll
7100263681	3903W50	3M™ Vinyl Duct Tape 3903i, White, 50 mm x 50 m	24	Roll
7100263683	3903Y50	3M™ Vinyl Duct Tape 3903i, Yellow, 50 mm x 50 m	24	Roll

3M™ Heavy Duty Duct Tape 3939

3M™ Heavy Duty Duct Tape 3939 has the tensile strength and adhesion for splicing, masking, patching, seaming, hanging poly sheeting, sealing PVC pipes, covering trip hazards, and a host of other industrial applications.

- Industrial-grade duct tape for splicing, masking, patching, sealing, and seaming
- High tensile strength for a secure hold under stress
- Thick rubber adhesive bonds to most rough and smooth surfaces for a tight seal



Product ID	Part Number	Product Name	MOQ	OU
7000028933	xxx	3M™ Heavy Duty Duct Tape 3939, Silver, 48 mm x 55 m	24	Roll

3M™ Heavy Duty Duct Tape 2904

3M™ Heavy Duty Duct Tape 2904 is a versatile, durable general purpose duct tape with high holding power and a broad attribute performance for demanding jobs. It is designed for general maintenance, bundling, wrapping, attaching, sealing, protecting, and colour coding. It is made of polyethylene film on canvas fabric and a synthetic rubber adhesive.

- Aggressive synthetic rubber adhesive provides instant adhesion to a wide range of surfaces
- Tears easily by hand in both directions
- Excellent conformability and high tensile strength, ideal for bundling



Product ID	Part Number	Product Name	MOQ	OU
7100098643	xxx	3M™ Heavy Duty Duct Tape 2904, Black, 48 mm x 50 m	24	Roll
7100098707	xxx	3M™ Heavy Duty Duct Tape 2904, Silver, 48 mm x 50 m	24	Roll

Single Sided Tapes

3M™ General Purpose Conformable Duct Tape 2903

Scotch® General Purpose Duct Tape 2903 is a versatile, canvas canvas made of polyethylene film on canvas fabric and a synthetic rubber finish. A good choice for general maintenance, bundling, wrapping, fastening, sealing and protection



- Aggressive synthetic rubber adhesive provides instant adhesion to a wide range of surfaces.
- Can be torn in hand and in both directions
- High tensile strength, ideal for bundling

Product ID	Part Number	Product Name	MOQ	OU
7100098695	xxx	3M™ General Purpose Conformable Duct Tape 2903, Black, 48 mm x 50 m	24	Roll
7100098687	xxx	3M™ General Purpose Conformable Duct Tape 2903, Silver, 48 mm x 50 m	24	Roll

3M™ Value Duct Tape 1900

3M™ Value Duct Tape 1900 is a cost-effective duct tape for utility and general use and lighter duty non-critical applications. It is a good toolbox tape for general applications including light-duty sealing, bundling, marking, and temporary repairs in non-critical applications. Its synthetic rubber adhesive sticks on contact to smooth metal, glass, plastic, sealed concrete and more, and the water-resistant polyethylene coating seals well in moist and humid environments.



- Silver polyethylene backing over cloth scrim resists moisture for reliable sealing performance in moist or humid environments
- Seals well in moist and humid environments
- Conforms to irregular surfaces without lifting

Product ID	Part Number	Product Name	MOQ	OU
7000071798	xxx	3M™ Value Duct Tape 1900, Black, 50 mm x 50 m	24	Roll
7000071804	xxx	3M™ Value Duct Tape 1900, Black, 75 mm x 50 m	18	Roll
7000032383	xxx	3M™ Value Duct Tape 1900, Silver, 50 mm x 50 m	24	Roll

Single Sided Tapes

Sealing Tapes

3M™ Extreme Sealing Tape 4411N

From rain gutters to flashing and vents, rooftops to underground cable enclosures, 3M™ Extreme Sealing tape 4411 ensures a quick and robust bond. It creates water tight seals and sticks on contact to numerous substrates without drying time, dripping, oozing or mess.

- Sticks on contact to many metals and plastics without drying time, dripping, oozing, or mess
- Provides immediate seal with no wait time or oozing associated with liquid sealants
- No sticky residue on hands



Product ID	Part Number	Product Name	MOQ	OU
7010300467	xxx	3M™ Extreme Sealing Tape 4411N, Translucent , 38 mm x 4.5 m	12	Roll
7100137182	xxx	3M™ Extreme Sealing Tape 4411N, Translucent, 50 mm x 5.5 m, 1.0 mm, Blister IPC	4	Roll
7000049661	xxx	3M™ Extreme Sealing Tape 4411N, Translucent, 50 mm x 33 m, 1.0 mm	6	Roll
7100084307	xxx	3M™ Extreme Sealing Tape 4411N, Translucent, 121 mm x 33 m, 1.0 mm	2	Roll
7100288968	4411N610	3M™ Extreme Sealing Tape 4411N, Translucent, 610 mm x 33 m, 1.0 mm	1	Roll

3M™ Extreme Sealing Tape 4411B

3M™ Extreme Sealing Tape 4411B is a black, 1 mm thick, highly conformable, single-side acrylic tape with a high performance ionomer backing. Our tape was specifically designed to give you professional results under outdoor exposure to direct sunlight, as well as temperature and humidity extremes while creating an effective seal over an existing joint, seam, or penetration.

- Very good resistance to many common industrial solvents as well as elevated temperature exposure
- Tacky adhesive sticks on contact for immediate bond with no drying time, oozing, or clean up
- Black, 1 mm thick, conformable tape forms effective seals over contours, edges, rivets, and screw heads



Product ID	Part Number	Product Name	MOQ	OU
7100137163	xxx	3M™ Extreme Sealing Tape 4411B, Black, 50 mm x 5.5 m, 1.0 mm, Blister IPC	4	Roll
7000049663	4411B50	3M™ Extreme Sealing Tape 4411B, Black, 50 mm x 33 m, 1.0 mm	6	Roll
7100288972	xxx	3M™ Extreme Sealing Tape 4411B, Black, 610 mm x 33 m, 1.0 mm	1	Roll

3M™ Extreme Sealing Tape 4411G

3M™ Extreme Sealing Tape 4411G is a grey, 1 mm thick, highly conformable, single-side acrylic tape with a high performance ionomer backing. Our tape was specifically designed to give you professional results under outdoor exposure to direct sunlight, as well as temperature and humidity extremes while creating an effective seal over an existing joint, seam, or penetration.

- Very good resistance to many common industrial solvents as well as elevated temperature exposure
- Tacky adhesive sticks on contact for immediate bond with no drying time, oozing, or clean up
- Grey, 1 mm thick, conformable tape forms effective seals over contours, edges, rivets, and screw heads



Product ID	Part Number	Product Name	MOQ	OU
7000049662	xxx	3M™ Extreme Sealing Tape 4411G, Grey, 50 mm x 33 m, 1.0 mm	6	Roll
7100289033	4411G610	3M™ Extreme Sealing Tape 4411G, Grey, 610 mm x 33 m, 1.0 mm	1	Roll

Single Sided Tapes

3M™ Extreme Sealing Tape 4412

From rain gutters to flashing and vents, rooftops to underground cable enclosures, 3M™ Extreme Sealing Tape 4412 ensures a quick and robust bond. It creates water tight seals and sticks on contact to numerous substrates without drying time, dripping, oozing or mess.



- Sticks on contact to many metals and plastics without drying time, dripping, oozing, or mess
- Provides immediate seal with no wait time or oozing associated with liquid sealants
- No sticky residue on hands

Product ID	Part Number	Product Name	MOQ	OU
7000029082	xxx	3M™ Extreme Sealing Tape 4412N, Translucent, 25 mm x 16.5 m, 2.0 mm	9	Roll
7000021302	xxx	3M™ Extreme Sealing Tape 4412N, Translucent, 50 mm x 16.5 m, 2.0 mm	6	Roll
7100002405	xxx	3M™ Extreme Sealing Tape 4412N, Translucent, 75 mm x 16.5 m, 2.0 mm	3	Roll
7000049564	xxx	3M™ Extreme Sealing Tape 4412N, Translucent, 102 mm x 16.5 m, 2.0 mm	2	Roll
7100289108	4412N610	3M™ Extreme Sealing Tape 4412N, Translucent, 610 mm x 16.5 m, 2.0 mm	1	Roll

3M™ Extreme Sealing Tape 4412G

3M™ Extreme Sealing Tape 4412G is a grey, 2.0 mm thick, highly conformable, single-side acrylic tape with a high performance ionomer backing. Our tape was specifically designed to give you professional results under outdoor exposure to direct sunlight, as well as temperature and humidity extremes while creating an effective seal over an existing joint, seam, or penetration.



- Very good resistance to many common industrial solvents as well as elevated temperature exposure
- Tacky adhesive sticks on contact for immediate bond with no drying time, oozing, or clean up
- Grey, 2 mm thick, conformable tape forms effective seals over contours, edges, rivets, and screw heads

Product ID	Part Number	Product Name	MOQ	OU
7000047348	xxx	3M™ Extreme Sealing Tape 4412G, Grey, 50 mm x 16.5 m, 2.0 mm	6	Roll
7100289034	4412G610	3M™ Extreme Sealing Tape 4412G, Grey, 610 mm x 16.5 m, 2.0 mm	1	Roll

Single Sided Tapes

3M™ Fast Ultra Conformable Tape 8045P

3M™ Ultra Conformable 8045P is a very stretchy and conformable tape, which allows to seal challenging flashing details. Due to its unique technical properties 3M™ Ultra Conformable 8045P seals much faster than using conventional flashing tapes.

- The conformability and elongation properties of the 8045P Ultra Conformable tape, allows much faster and safer sealing of challenging applications
- Due to the self bonding capabilities, it creates very strong seams
- Adhesive system allows primerless application on a lot of common building substrates



Product ID	Part Number	Product Name	MOQ	OU
7100100277	xxx	3M™ Fast Ultra Conformable Tape 8045P, Grey, 60 mm x 25 m, 1.1 mm	20	Roll
7100108888	xxx	3M™ Fast Ultra Conformable Tape 8045P, Grey, 60 mm x 25 m, 1.1 mm	5	Roll
7100100275	xxx	3M™ Fast Ultra Conformable Tape 8045P, Grey, 100 mm x 25 m, 1.1 mm	12	Roll
7100100276	xxx	3M™ Fast Ultra Conformable Tape 8045P, Grey, 150 mm x 25 m, 1.1 mm	8	Roll
7100108714	xxx	3M™ Fast Ultra Conformable Tape 8045P, Grey, 150 mm x 25 m, 1.1 mm	2	Roll
7100108887	xxx	3M™ Fast Ultra Conformable Tape 8045P, Grey, 200 mm x 25 m, 1.1 mm	6	Roll
7100100274	xxx	3M™ Fast Ultra Conformable Tape 8045P, Grey, 200 mm x 25 m, 1.1 mm	6	Roll
7100101074	8045UC121025	3M™ Fast Ultra Conformable Tape 8045P, Grey, 1210 mm x 25 m, 1.1 mm	1	Roll

3M™ Flexible Air Sealing Tape 8067E - FAST F

3M™ Flexible Air Sealing Tape 8067E FAST-F is our self-adhered, waterproof flashing tape designed for sealing around openings and joints in building applications e.g. penetrations in exterior walls.

- Resists UV exposure for up to 6 months
- Proprietary film backing seals around nails and staples to prevent moisture intrusion (passed ASTM 1970)
- No adhesive melting or staining in summer heat



Product ID	Part Number	Product Name	MOQ	OU
7100086951	xxx	3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 50 mm x 25 m, 0.25 mm	24	Roll
7100086954	xxx	3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 60 mm x 25 m, 0.25 mm	20	Roll
7100086952	xxx	3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 60 mm x 25 m, 0.25 mm, 30-30 Single Split	20	Roll
7100171950	xxx	3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 60 mm x 25 m, 30-30 Split liner	360	Each
7100135038	xxx	3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 75 mm x 25 m, split liner	16	Roll
7100086953	xxx	3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 100 mm x 25 m, 0.25 mm, 50-50 Split	12	Roll
7100134318	xxx	3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 120 mm x 22.86 m, 60/60	144	Roll
7100087101	xxx	3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 200 mm x 25 m, 0.25 mm, 50-50 Split Liner	12	Roll

Single Sided Tapes

3M™ Flexible Air Sealing Tape 8068E - FAST G

3M™ Flexible Air Sealing Tape 8068E - FAST G is an air, vapour, moisture and water impermeable tape with an aggressive, high-tack pressure sensitive acrylic adhesive with reinforcing grid. Our tape is self-wound. It is hand tearable and used in a variety building and construction applications.

- Resists UV exposure for up to 6 months
- Proprietary film backing seals around nails and staples to prevent moisture intrusion (passed ASTM 1970)
- No adhesive melting or staining in summer heat



Product ID	Part Number	Product Name	MOQ	OU
7100027085	xxx	3M™ Flexible Air Sealing Tape 8068E - FAST G, Tan, 50 mm x 25 m, 1.3 mm	24	Roll
7100027084	xxx	3M™ Flexible Air Sealing Tape 8068E - FAST G, Tan, 60 mm x 25 m, 1.3 mm	20	Roll

3M™ Flexible Air Sealing Tape 8069E

3M™ Flexible Air Sealing Tape 8069E - FAST D is an air, moisture and water impermeable tape with an aggressive, high-tack acrylic pressure sensitive adhesive. Our double-sided tape enables nail-free, airtight adhesion vapour-retardant membranes to plaster both inside and out.

- Resists UV exposure for up to 6 months
- No adhesive melting or staining in summer heat
- Polyethylene red release liner allows for ease of use and application



Product ID	Part Number	Product Name	MOQ	OU
7100087075	xxx	3M™ Flexible Air Sealing Tape 8069E - FAST D, 20 mm x 25 m, 0.47 mm	15	Roll
7100087488	xxx	3M™ Flexible Air Sealing Tape 8069E - FAST D, 25 mm x 25 m, 0.47 mm	12	Roll
7100100910	xxx	3M™ Flexible Air Sealing Tape 8069E - FAST D, 50 mm x 25 m, 0.47 mm	6	Roll
7100181760	xxx	3M™ Flexible Air Sealing Tape 8069E - FAST D, 1220 m x 250 m, 0.47 mm	1	Roll

3M™ Sealing and Holding Tape 8069

3M™ Sealing and Holding Tape 8069E is a double sided tape with a tough, conformable carrier and aggressive acrylic adhesive for sealing and holding to difficult-to-stick-to surfaces under a variety of conditions.

- Offers aggressive, quick sticking adhesive for fast and sure holding
- Adheres to a wide variety of difficult-to-stick-to surfaces such as concrete, wood, and plastic sheeting
- Polyethylene red release liner allows for ease of use and application



Product ID	Part Number	Product Name	MOQ	OU
7100087076	xxx	3M™ Flexible Air Sealing Tape 8069E - FAST D, Silver, 50 mm x 25 m, 0.410 mm	6	Roll
7100089779	xxx	3M™ Flexible Air Sealing Tape 8069E - FAST D, Silver, 1220 mm x 50 m, 0.410 mm	1	Roll




Paper and Print

3M™ Cushion-Mount™ Plate Mounting Tapes

Let us find a tape that meets the demands of your craft.

One of the make-or-break decisions of the flexographic craft is which mounting tape to use. With a full suite of options and decades of industry experience behind us, you can depend on 3M to help you to match a tape to the job at hand.

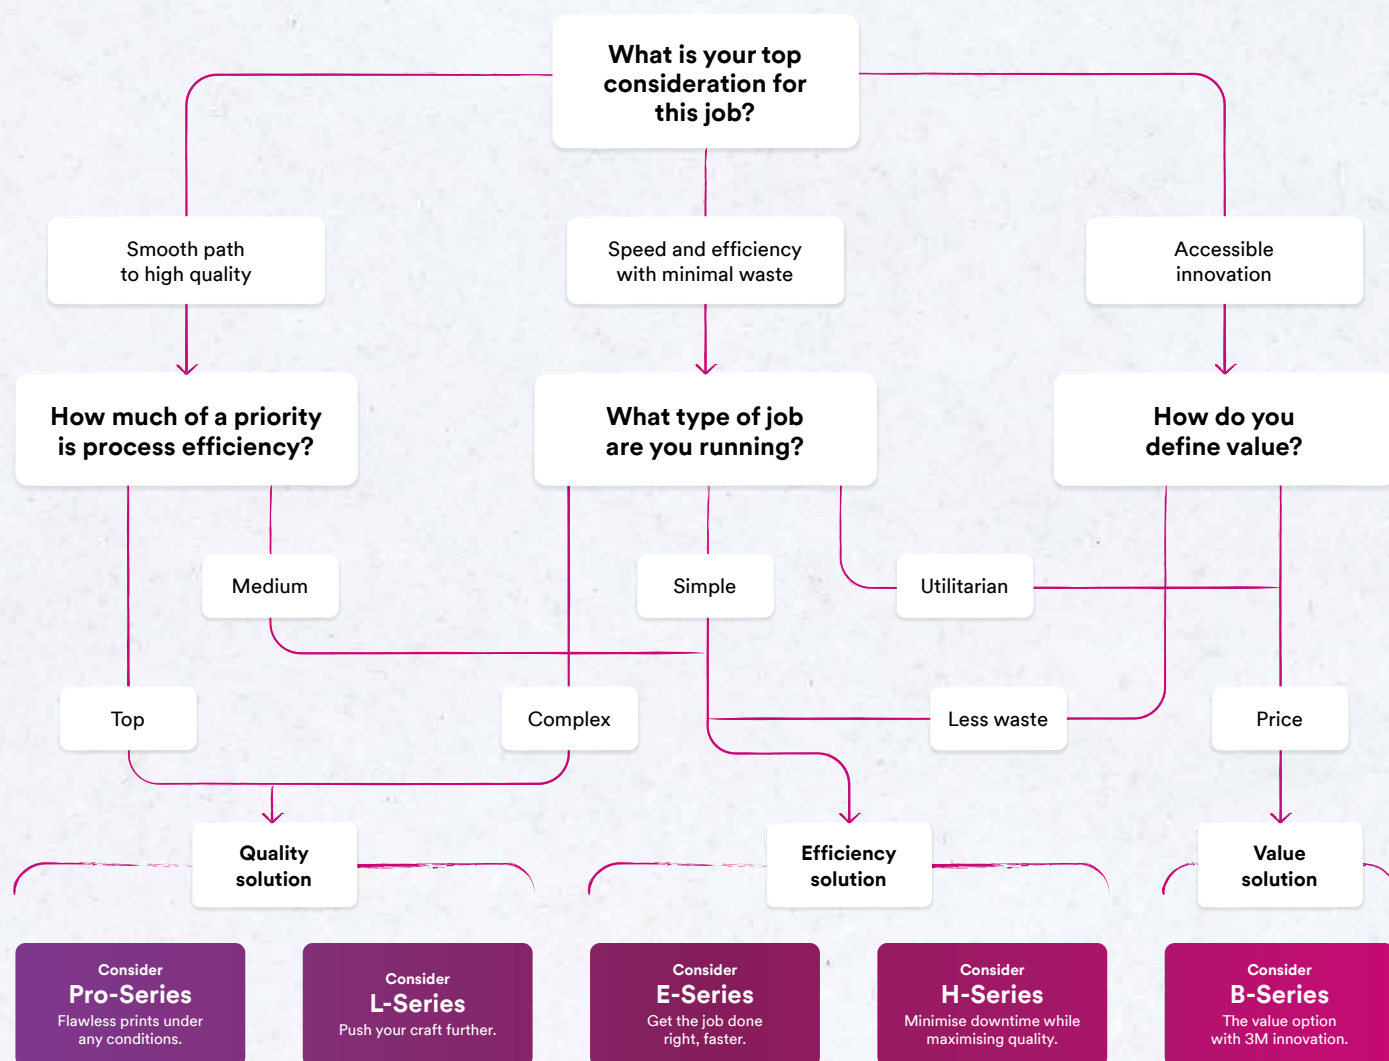

Contact our passionate pros to get help selecting the perfect match.

Product selection and use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

3M United Kingdom PLC
3M Centre
Cain Road
Bracknell
RG12 8HT

3M Ireland Limited
The Iveagh Building
Carrickmines Park
Carrickmines
Dublin 18

© 3M 2022. All rights reserved. 3M and Cushion-Mount are trademarks of 3M Company. OMG275511.

Paper and Print

Splicing & Tapping Tapes

3M™ Splittable Flying Splice Tape 8387

3M™ Splittable Flying Splice Tape 8387 is our 7 mil double coated film tape that separates into two single sided tapes.

- Purple, 7 mil thick film backing, splittable flying splice tape
- Fibre free splittable flying splice tape with a film backing and excellent adhesion for splicing to a variety of substrates, including low surface energy films. Tape splits into a pink layer and a grey layer to identify splice components
- Reliable splitting mechanism ensures consistent results



Product ID	Part Number	Product Name	MOQ	OU
7100044924	xxx	3M™ Splittable Flying Splice Tape 8387, Purple, 50 mm x 50 m, 0.19 mm	24	Roll

3M™ Splittable Flying Splice Tape 7387

3M™ Splittable Flying Splice Tape 7387 is a tape designed for splicing of film and foil webs at process speeds.

- Designed for straight-line flying splices for a variety of film substrates such as polyethylene, case polyp-ropylene and aluminium foil
- Designed so that no fibres are present after splitting, thereby preventing contamination of the central impression drum and removing the need for costly cleaning to remove fiber residues after splicing
- Reliable splitting mechanism ensures consistent results



Product ID	Part Number	Product Name	MOQ	OU
7100103009	xxx	3M™ Splittable Flying Splice Tape 7387, White, 50 mm x 50 m, 0.34 mm	16	Roll

3M™ Repulpable Flatback Tape R3127

3M™ Repulpable Flat Backed Tape R3127 is our thin repulpable web processing tape available in blue, white, kraft and red. The backing of this tape contains a thin silicon release coating to eliminate the need for a liner and is therefore not printable.

- 4.5 mil, extensible paper backing, single sided tape, excellent heat resistance up to 176.67 °C
- Thin, strong, conformable backing for core starting, tabbing, and roll closing, good for a wide variety of papers and temperatures
- Repulpable adhesive prevents broke contamination from non-repulpable splice material



Product ID	Part Number	Product Name	MOQ	OU
7100027855	xxx	3M™ Repulpable Flatback Tape R3127, White, 36 mm x 55 m, 0.11 mm	24	Roll
7100027856	R312748	3M™ Repulpable Flatback Tape R3127, White, 48 mm x 55 m, 0.11 mm	24	Roll

Paper and Print

3M™ Repulpable Strong Single Coated Tape R3187

3M™ Repulpable Strong Single Coated Tape R3187 is our repulpable bleached high strength extensible kraft paper backing, coated with a high tack transparent repulpable adhesive. Available in blue, white, kraft, and black coloured backings.

- 7.5 mil, extensible paper backing, single sided tape, excellent heat resistance up to 176.67 °C
- Super strong backing for core starting, tabbing, and roll closing, good for a wide variety of papers and temperatures
- Repulpable adhesive prevents broke contamination from non-repulpable splice material

Product ID	Part Number	Product Name	MOQ	OU
7100279673	xxx	3M™ Repulpable Strong Single Coated Tape R3187, Blue, 18 mm x 55 m, 0.19 mm	48	Roll
7100028023	xxx	3M™ Repulpable Strong Single Coated Tape R3187, Blue, 48 mm x 55 m, 0.19 mm	24	Roll
7100028024	xxx	3M™ Repulpable Strong Single Coated Tape R3187, Blue, 72 mm x 55 m, 0.19 mm	12	Roll
7000049192	xxx	3M™ Repulpable Strong Single Coated Tape R3187, Blue, 102 mm x 55 m, 0.19 mm	8	Roll
7100028052	xxx	3M™ Repulpable Strong Single Coated Tape R3187, White, 72 mm x 55 m, 0.19 mm	12	Roll

3M™ Repulpable Double Coated Tape R3227

3M™ Repulpable Web Processing Double Coated Tape R3227 is our repulpable web processing double coated tape with high shear properties. A tissue paper tape available in blue and white and supplied on a kraft liner.



- 3.0 mil, tissue backing, double sided tape, excellent heat resistance up to 176.67 °C
- Thin, strong, conformable backing for core starting, tabbing, roll closing, and zero speed splicing at the sheeter, good for a wide variety of papers and temperatures
- Repulpable adhesive prevents broke contamination from non-repulpable splice material

Product ID	Part Number	Product Name	MOQ	OU
7100279679	xxx	3M™ Repulpable Double Coated Tape R3227, Blue, 18 mm x 55 m, 0.09 mm	48	Roll
7100028055	xxx	3M™ Repulpable Double Coated Tape R3227, Blue, 24 mm x 55 m, 0.09 mm	36	Roll
7100028056	R3227B36	3M™ Repulpable Double Coated Tape R3227, Blue, 36 mm x 55 m, 0.09 mm	24	Roll
7100028145	xxx	3M™ Repulpable Double Coated Tape R3227, Blue, 48 mm x 55 m, 0.09 mm	1	Roll
7100279680	R322718	3M™ Repulpable Double Coated Tape R3227, White, 18 mm x 55 m, 0.13 mm	48	Roll
7100028148	xxx	3M™ Repulpable Double Coated Tape R3227, White, 24 mm x 55 m, 0.09 mm	36	Roll

3M™ Repulpable Heavy Duty Double Coated Tape R3287

3M™ Repulpable Heavy Duty Double Coated Tape R3287 is our white, double coated tape with a paper carrier coated with a high tack, high shear strength, repulpable adhesive. This tape has an easy release, repulpable liner for ease of use in manual, semi-automated and automated dispensing applications. It is an ideal choice for various core starting, roll closing, and temporary splicing applications.



- Designed for core starting, roll closing and temporary splicing applications
- Repulpable: water and alkali dispersibility helps eliminate risk of contaminating paper mill broke with non-repulpable material; meets or exceeds TAPPI UM-213 procedure A
- High tack adhesive ensures fast, easy and reliable core starting to help increase productivity

Product ID	Part Number	Product Name	MOQ	OU
7100028169	xxx	3M™ Repulpable Heavy Duty Double Coated Tape R3287, White, 36 mm x 55 m, 0.13 mm	24	Roll

MOQ = Minimum Order Quantity, OU = Order Unit

Paper and Print

3M™ Repulpable Double Coated Flying Paster For Newsprint 913

3M™ Repulpable Double Coated Flying Paster For Newsprint 913 is our lightweight tissue tape coated on both sides with a blue, high-tack, repulpable adhesive. It combines quick adhesion with excellent heat resistance.

- Designed for newspaper splicing
- Can be used in conjunction with 9030 nose tabs
- Repulpable adhesive and liner won't contaminate paper mill broke system: meets or exceeds TAPPI UM-213, Procedure A



Product ID	Part Number	Product Name	MOQ	OU
7000116494	xxx	3M™ Repulpable Double Coated Flying Paster For Newsprint 913, Blue, 25 mm x 50 m, 0.08 mm	36	Roll
7000042415	xxx	3M™ Repulpable Double Coated Flying Paster For Newsprint 913, Blue, 50 mm x 50 m, 0.08 mm	18	Roll

3M™ Splicing System with Built-in Sensor R9990

3M™ Splicing System with Built-in Sensor R9990 is our double coated tape laminate with a low release split liner and a metalised layer for auto sensing and splice detection applications.

- Reliable splicing operation
- Quick and easy splices
- Coatable and printable

Product ID	Part Number	Product Name	MOQ	OU
7000116521	xxx	3M™ Splicing System With Built-In Sensor R9990, Blue, 37.5 mm x 33 m, 0.07 mm	12	Roll

3M™ Repulpable Splicing System 9990N

The 3M™ Repulpable Splicing System 9990N is our double coated, splittable tape construction featuring an acrylic adhesive and an easy release paper liner, with liner scored for easy manual application and built-in sensor layer.

- Designed for straight line flying splices
- Easy release paper liner
- Built-in aluminium sensor



Product ID	Part Number	Product Name	MOQ	OU
7000116530	xxx	3M™ Repulpable Splicing System 9990N, Blue, 37.5 mm x 33 m, 0.09 mm	12	Roll
7000116528	xxx	3M™ Repulpable Splicing System 9990N, Blue, 50 mm x 33 m, 0.09 mm	8	Roll
7000116531	xxx	3M™ Repulpable Splicing System 9990N, Blue, 50 mm x 100 m, 0.09 mm	5	Roll

Paper and Print

3M™ Repulpable Splicing System R9996

3M™ Repulpable Splittable Flying Splice Tape R9996 is our double coated, repulpable splicing system with a low release split liner for use in flying splice tape applications.

- Blue splicing side 2.5 mil, clear tabbing side 2.2 mil, double sided splittable tape, easy release kraft split liner, excellent heat resistance up to 204 °C
- Straight across flying paster for a wide range of paper, performs well over a wide range of temperatures
- Repulpable adhesive prevents broke contamination from non-repulpable splice material



Product ID	Part Number	Product Name	MOQ	OU
7000116517	xxx	3M™ Repulpable Splicing System R9996, Blue, 50 mm x 55 m, 0.07 mm	18	Roll
7000116516	xxx	3M™ Repulpable Splicing System R9996, Blue, 75 mm x 55 m, 0.07 mm	12	Roll

3M™ Repulpable Splicing System R9993

3M™ Repulpable Splittable Flying Splice Tape R9993 is our double coated, repulpable splicing system with a low release split liner for use in flying splice tape applications.

- Blue splicing side 2.5 mil, clear tabbing side 2.2 mil, double sided splittable tape, easy release kraft split liner, excellent heat resistance up to 204 °C
- Straight across flying paster for newsprint papers, performs well at cold temperatures, quick stick
- Repulpable adhesive prevents broke contamination from non-repulpable splice material

Product ID	Part Number	Product Name	MOQ	OU
7000042417	xxx	3M™ Repulpable Splicing System R9993, Blue, 37.5 mm x 33 m, 0.07 mm	12	Roll
7000043744	xxx	3M™ Repulpable Splicing System R9993, Blue, 50 mm x 33 m, 0.07 mm	6	Roll

3M™ Repulpable Flying Splice Tape 906B

3M™ Repulpable Flying Splice Tape 906B is designed for flying splices at the off-machine coater (OMC) in paper mills. Our tape is furnished on an easy-release, semi-bleached repulpable paper liner.

- High tack, high shear strength adhesive for flying splice and core starting applications
- Completely repulpable construction so no need to remove splice from waste: meets or exceeds TAPPI UM-213, procedure A
- Meets the requirements of indirect food additive regulations as described under 21 CFR 176.170 and 21 CFR 176.180



Product ID	Part Number	Product Name	MOQ	OU
7000116510	xxx	3M™ Repulpable Flying Splice Tape 906B, Blue, 12 mm x 150 m, 0.08 mm	54	Roll
7000116490	xxx	3M™ Repulpable Flying Splice Tape 906B, Blue, 25 mm x 50 m, 0.08 mm	36	Roll
7000116491	xxx	3M™ Repulpable Flying Splice Tape 906B, Blue, 38 mm x 50 m, 0.08 mm	24	Roll
7000116492	xxx	3M™ Repulpable Flying Splice Tape 906B, Blue, 50 mm x 50 m, 0.08 mm	18	Roll

Paper and Print

3M™ Repulpable Flying Splice Tape 906W

3M™ Repulpable Flying Splice Tape 906W is designed for flying splices at the off-machine coater (OMC) in paper mills. Our tape is furnished on an easy-release, semi-bleached repulpable paper liner.

- High tack, high shear strength adhesive for flying splice and core starting applications
- Completely repulpable construction so no need to remove splice from waste: meets or exceeds TAPPI UM-213, procedure A
- Meets the requirements of indirect food additive regulations as described under 21 CFR 176.170 and 21 CFR 176.180



Product ID	Part Number	Product Name	MOQ	OU
7000116493	xxx	3M™ Repulpable Flying Splice Tape 906W, White, 9 mm x 50 m, 0.08 mm	96	Roll
7000116537	xxx	3M™ Repulpable Flying Splice Tape 906W, White, 12 mm x 50 m, 0.08 mm	72	Roll
7000116477	xxx	3M™ Repulpable Flying Splice Tape 906W, White, 19 mm x 50 m, 0.08 mm	48	Roll
7000116478	xxx	3M™ Repulpable Flying Splice Tape 906W, White, 25 mm x 50 m, 0.08 mm	36	Roll
7000116479	xxx	3M™ Repulpable Flying Splice Tape 906W, White, 38 mm x 50 m, 0.08 mm	24	Roll
7000116480	xxx	3M™ Repulpable Flying Splice Tape 906W, White, 50 mm x 50 m, 0.08 mm	18	Roll

3M™ Splittable Flying Splice Tape 9359

3M™ Splittable Flying Splice Tape 9359 is our double coated, splittable tape construction designed for straight line flying splices, furnished with repulpable acrylic adhesive on both sides and an easy release paper liner (also repulpable), with liner score for easy manual application.

- Flying splice of paper webs on an off-machine coater or on core driven printing presses
- Not intended for use on belt driven printing presses
- Reliable splitting mechanism ensures consistent results

Product ID	Part Number	Product Name	MOQ	OU
7100080105	xxx	3M™ Splittable Flying Splice Tape 9359, Blue, 75 mm x 55 m	12	Roll
7100080108	xxx	3M™ Splittable Flying Splice Tape 9359, Blue, 75 mm x 55 m	6	Roll

3M™ Repulpable Flying Splice Tape 9353

3M™ Repulpable Flying Splice Tape 9353 is our double coated, splittable tape construction designed for straight line flying splices, furnished with repulpable acrylic adhesive on both sides and an easy release paper liner (also repulpable), with liner score for easy manual application.

- Flying splice of paper webs in newsprint, offset litho, gravure and flexographic printing processes
- The splittable layer has been modified to provide a lower overall splitting force for improved splice reliability on belt driven presses
- This product can also be used on core driven presses



Product ID	Part Number	Product Name	MOQ	OU
7100080092	xxx	3M™ Repulpable Flying Splice Tape 9353, Blue, 37 mm x 33	12	Roll
7100079680	xxx	3M™ Repulpable Flying Splice Tape 9353, Blue, 50 mm x 33 m	8	Roll
7100080096	xxx	3M™ Repulpable Flying Splice Tape 9353, Blue, 50 mm x 33 m	16	Roll
7100080097	xxx	3M™ Repulpable Flying Splice Tape 9353, Blue, 50 mm x 55 m	16	Roll

Paper and Print

3M™ Splittable Flying Splice Tape 9356

3M™ Splittable Flying Splice Tape 9356 is our double coated, splittable tape construction designed for straight line flying splices, furnished with repulpable acrylic adhesive on both sides and an easy release paper liner (also repulpable), with liner score for easy manual application.

- Flying splice of paper webs on an off-machine coater or on core driven printing presses
- Not intended for use on belt driven printing presses
- Reliable splitting mechanism ensures consistent results

Product ID	Part Number	Product Name	MOQ	OU
7100080100	xxx	3M™ Splittable Flying Splice Tape 9356, Blue, 50 mm x 55 m	16	Roll
7100080101	xxx	3M™ Splittable Flying Splice Tape 9356, Blue, 60 mm x 55 m	16	Roll
7100080102	xxx	3M™ Splittable Flying Splice Tape 9356, Blue, 75 mm x 55 m	12	Roll

3M™ Repulpable Flying Splice Tape 9351AL

3M™ Repulpable Flying Splice Tape 9351AL is our double coated, splittable tape construction designed for straight line flying splices, furnished with repulpable acrylic adhesive on both sides and an easy release paper liner (also repulpable).

- Good shear for both cold set newsprint, and heat set commercial printing processes
- Liner score for easy manual application
- Improved splice reliability on belt driven presses



Product ID	Part Number	Product Name	MOQ	OU
7100079530	xxx	3M™ Repulpable Flying Splice Tape 9351AL, Blue, 37 mm x 33 m, 0.10 mm	12	Roll
7100080091	xxx	3M™ Repulpable Flying Splice Tape 9351AL, Blue, 50 mm x 33 m, 0.10 mm	8	Roll

3M™ Repulpable Splicing System R9999

3M™ Repulpable Splittable Flying Splice Tape R9999 is our double coated, repulpable splicing system with a low release split liner for use in flying splice tape applications.

- Blue splicing side 4.5 mil, clear tabbing side 2.2 mil, double sided splittable tape, easy release kraft split liner, excellent heat resistance up to 204 °C
- Straight across flying paster for a wide range of paper, performs well over a wide range of temperatures
- Repulpable adhesive prevents broke contamination from non-repulpable splice material



Product ID	Part Number	Product Name	MOQ	OU
7000116514	xxx	3M™ Repulpable Splicing System R9999, Blue, 60 mm x 16 m, 0.12 mm	16	Roll
7000116515	xxx	3M™ Repulpable Splicing System R9999, Blue, 75 mm x 55 m, 0.12 mm	12	Roll

Paper and Print

3M™ Repulpable Splicing System 9993

3M™ Repulpable Single Coated Splicing Tape 9993N is a double coated, repulpable splicing tape with a low release split liner.

- Blue splicing side 2.5 mil, clear tabbing side 2.2 mil, double sided splittable tape, easy release kraft split liner, excellent heat resistance up to 400F
- Straight across flying paster for newsprint papers, performs well at cold temperatures, quick stick
- Repulpable adhesive prevents broke contamination from non-repulpable splice material, meets or exceeds TAPPI UM-213, procedure A, FDA compliant 21 CFR 176.170 (components of paper and paper-board in contact with aqueous and fatty food)



Product ID	Part Number	Product Name	MOQ	OU
7000116511	xxx	3M™ Repulpable Splicing System 9993N, Silver, 50 mm x 33 m, 0.07 mm	8	Roll

3M™ Repulpable Double Coated Tape 9974B

Our 3M™ Repulpable Sheeter Tape 9974B is primarily used for zero speed splicing at the sheeter, core starting and roll closing. A tissue paper tape available in blue supplied on a kraft liner.

- Blue, 3.0 mil, tissue backing, double sided tape, kraft liner, excellent heat resistance up to 176.7 °C
- Thin, strong, conformable backing for core starting, tabbing, roll closing, and zero speed splicing at the sheeter
- Repulpable adhesive prevents broke contamination from non-repulpable splice material



Product ID	Part Number	Product Name	MOQ	OU
7100027821	xxx	3M™ Repulpable Double Coated Tape 9974B, Blue, 48 mm x 55 m, 0.08 mm	120	Roll

3M™ Double Coated Tape 9737 Red

3M™ Double Coated Tape 9737 Red is a double-sided tape mounted on a thin polyester carrier with a pressure sensitive acrylic adhesive that offers a balance of high initial adhesion and good holding power. It is mounted on 55 lb. densified kraft paper liner for easy release and manipulation during application.

- Ideal performance in high speed splicing applications
- High tack acrylic adhesive performs well across broad temperature range
- Excellent peel, tack and shear strength to withstand rigorous splicing applications



Product ID	Part Number	Product Name	MOQ	OU
7000049263	xxx	3M™ Double Coated Tape 9737R, Red, 24 mm x 55 m, 0.09 mm	48	Roll
7000049265	xxx	3M™ Double Coated Tape 9737R, Red, 48 mm x 55 m, 0.09 mm	24	Roll

Paper and Print

3M™ Double Coated Tape 9737 Clear

3M™ Double Coated Tape 9737 Red is a double-sided tape mounted on a thin polyester carrier with a pressure sensitive acrylic adhesive that offers a balance of high initial adhesion and good holding power. It is mounted on 55 lb. densified kraft paper liner for easy release and manipulation during application.

- Ideal performance in high speed splicing applications
- High tack acrylic adhesive performs well across broad temperature range
- Excellent peel, tack and shear strength to withstand rigorous splicing applications



Product ID	Part Number	Product Name	MOQ	OU
7000029048	xxx	3M™ Double Coated Tape 9737, Clear, 48 mm x 55 m, 0.09 mm	24	Roll

3M™ Double Coated Tape 9738 Red

3M™ Double Coated Tape 9738 Red is a double-sided tape mounted on a non-woven tissue carrier with a pressure sensitive acrylic adhesive that offers a balance of high initial adhesion and good holding power. It is mounted on a 55 lb. densified kraft paper liner for easy release and manipulation during application.

- Ideal performance in high speed splicing applications
- High tack acrylic adhesive performs well across broad temperature range
- Excellent peel, tack and shear strength to withstand rigorous splicing applications



Product ID	Part Number	Product Name	MOQ	OU
7000049277	xxx	3M™ Double Coated Tape 9738R, Red, 24 mm x 55 m, 0.09 mm	48	Roll
7000029050	xxx	3M™ Double Coated Tape 9738R, Red, 48 mm x 55 m, 0.09 mm	24	Roll

3M™ Double Coated Tape 9738 Clear

3M™ Double Coated Tape 9738 Red is a double-sided tape mounted on a non-woven tissue carrier with a pressure sensitive acrylic adhesive that offers a balance of high initial adhesion and good holding power. It is mounted on a 55 lb. densified kraft paper liner for easy release and manipulation during application.

- Ideal performance in high speed splicing applications
- High tack acrylic adhesive performs well across broad temperature range
- Excellent peel, tack and shear strength to withstand rigorous splicing applications



Product ID	Part Number	Product Name	MOQ	OU
7000029049	xxx	3M™ Double Coated Tape 9738, Clear, 48 mm x 55 m, 0.09 mm	24	Roll

Paper and Print

Flexographic Plate Mounting Tapes

3M™ Cushion-Mount™ Plus Plate Mounting Tape L1120

Mount your photopolimeric plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape L1120. Our 0.51 mm tan, double coated foam tape has the air release feature and is tolerant to ink contaminants allowing for easy and clean plate removal. It is used for high quality process printing.

- Tan, flexo plate mounting tape has the air release feature adhesive, which is tolerant to ink contaminants allowing for easy and clean plate removal
- 0.51 mm thickness
- Soft/Process




Product ID	Part Number	Product Name	MOQ	OU
7100053471	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1120, Orange, 1372 mm x 23 mm	1	Roll
7100053575	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1120, Tan, 457.2 mm x 22.86 m	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape L1820

Mount your photopolimer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape L1820. Our 0.51 mm blue, double coated foam tape has the air release feature. It is tolerant to ink contaminants allowing for easy and clean plate removal, and used for plates containing mostly solids in combination.

- Blue, flexo plate mounting tape has the air release feature adhesive, which is tolerant to ink contaminants allowing for easy and clean plate removal
- 0.51 mm thickness
- Firm




Product ID	Part Number	Product Name	MOQ	OU
7100136280	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1820, Light Blue, 457 mm x 23 m, 0.5 mm	3	Roll
7100136279	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1820, Light Blue, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape L1720

Mount your photopolimer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape L1720. Our 0.51 mm teal, double coated foam tape has the air release feature and is tolerant to ink contaminants allowing for easy and clean plate removal. It is used for combination where more solids exist.

- Teal, flexo plate mounting tape has the air release feature adhesive, which is tolerant to ink contaminants allowing for easy and clean plate removal
- 0.51 mm thickness
- Medium firm



Product ID	Part Number	Product Name	MOQ	OU
7100136620	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1720, Blue, 457 mm x 23 m, 0.5 mm	1	Roll
7100136621	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1720, Blue, 1372 mm x 23 m, 0.5 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape L1520

Mount your photopolimeric plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape L1520. Our 0.51 mm purple, double coated foam tape has the air release feature and is tolerant to ink contaminants allowing for easy and clean plate removal. It is used for combination.



- Purple, flexo plate mounting tape has the air release feature adhesive, which is tolerant to ink contaminants allowing for easy and clean plate removal
- 0.51 mm thickness
- Medium

Product ID	Part Number	Product Name	MOQ	OU
7100136558	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1520, Purple, 457 mm x 23 m, 0.5 mm	1	Roll
7100136285	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1520, Purple, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape L1020

Mount your photopolimeric plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape L1020. Our 0.51 mm white, double coated foam tape has the air release feature and is tolerant to ink contaminants allowing for easy and clean plate removal. It is used for combination jobs.



- White, flexo plate mounting tape has the air release feature adhesive, which is tolerant to ink contaminants allowing for easy and clean plate removal
- 0.51 mm thickness
- Standard density

Product ID	Part Number	Product Name	MOQ	OU
7100136273	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1020, White, 457 mm x 23 m, 0.5 mm	1	Roll
7100136272	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1020, White, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape L1320

Mount your photopolimer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape L1320. Our 0.51 mm yellow, double coated foam tape has the air release feature. It is tolerant to ink contaminants allowing for easy and clean plate removal, and is used for combination (halftone exceed solids).



- Yellow, flexo plate mounting tape has the air release feature adhesive, which is tolerant to ink contaminants allowing for easy and clean plate removal
- 0.51 mm thickness
- Medium soft

Product ID	Part Number	Product Name	MOQ	OU
7100136278	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1320, Yellow, 457 mm x 23 m, 0.5 mm	1	Roll
7100136277	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1320, Yellow, 1372 mm x 23 m, 0.5 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape L1920

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape L1920. Our 0.51 mm pink, double coated foam tape has the air release feature. It is tolerant to ink contaminates allowing for easy and clean plate removal, and is used for high speed when process/halftone images dominate.

- Pink, flexo plate mounting tape has the air release feature adhesive, which is tolerant to ink contaminates allowing for easy and clean plate removal
- 0.51 mm thickness
- Light medium



Product ID	Part Number	Product Name	MOQ	OU
7100136283	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1920, Light Pink, 457 mm x 23 m, 0.5 mm	1	Roll
7100137064	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1920, Light Pink, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape L1220

3M™ Cushion-Mount™ Plus Plate Mounting Tape L1220 with easy mount adhesive is designed for mounting flexographic print plates to cylinders or sleeves. This orange plate mounting sticky back foam tape provides high quality light combination print.

- 0.020 inch (0.51 mm) double coated light density orange foam tape
- Designed to be easily removed from ink contaminated print plates
- Ideal for printing combinations of solids and process with halftone dots



Product ID	Part Number	Product Name	MOQ	OU
7100050482	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1220, Orange, 457 mm x 23 m, 0.51 mm	1	Roll
7100053473	L12201372	3M™ Cushion-Mount™ Plus Plate Mounting Tape L1220, Orange, 1372 mm x 23 m, 0.51 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1820

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1820. Our 0.51 mm blue, double coated foam tape has the air release feature with easy plate side removal. It is used for plates that contain mostly solids in a combination of solid and halftone images.

- Blue, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Firm



Product ID	Part Number	Product Name	MOQ	OU
7000042365	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1820, Blue, 457 mm x 23 m, 0.5 mm	1	Roll
7000042366	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1820, Blue, 1372 mm x 23 m, 0.5 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1720

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1720. Our 0.51 mm teal, double coated foam tape has the air release feature with easy plate side removal. It is used when you have slightly more solids in a combination of solid and halftone printing.



- Teal, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Medium firm

Product ID	Part Number	Product Name	MOQ	OU
7000042363	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1720, Teal, 457 mm x 23 m, 0.5 mm	1	Roll
7000042364	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1720, Teal, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1520

Mount your photopolimeric plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1520. Our 0.51 mm white, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed printing with fine type reverses and expanded colour gamut.



- Purple, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Medium

Product ID	Part Number	Product Name	MOQ	OU
7100227956	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1520, Purple, 457 mm x 23 m	36	Roll
7100009003	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1520, Purple, 457 mm x 23 m, 0.5 mm	1	Roll
7000042352	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1520, Purple, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1020

Mount your photopolimeric plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1020. Our 0.51 mm white, double coated foam tape has the air release feature with easy plate side removal. It is used for combination jobs.



- White, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Standard density

Product ID	Part Number	Product Name	MOQ	OU
7000042356	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1020, White, 457 mm x 23 m, 0.5 mm	1	Roll
7000042377	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1020, White, 1372 mm x 23 m, 0.5 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1320

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1320. Our 0.51 mm yellow, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed printing of combination work when halftone areas exceed solids.

- Yellow flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Medium soft



Product ID	Part Number	Product Name	MOQ	OU
7000042383	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1320, Yellow, 457 mm x 23 m, 0.5 mm	1	Roll
7000042382	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1320, Yellow, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1920

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1920. Our 0.51 mm pink, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed when process and halftone images predominate.

- Pink, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Light medium



Product ID	Part Number	Product Name	MOQ	OU
7000042368	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1920, Pink, 457 mm x 23 m, 0.5 mm	1	Roll
7000042367	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1920, Pink, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1220

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1220. Our 0.51 mm orange, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed process work.

- Orange, flexo plate mounting tape with air release feature
- 0.51 mm thickness
- Light



Product ID	Part Number	Product Name	MOQ	OU
7000042756	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1220, Orange, 457 mm x 23 m, 0.51 mm	1	Roll
7000049283	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1220, Orange, 1372 mm x 23 m, 0.51 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1120

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1120. Our 0.51 mm tan, double coated foam tape has the air release feature with easy plate side removal. It is used for high quality process printing.



- Tan, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Soft/Process

Product ID	Part Number	Product Name	MOQ	OU
7000042361	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1120, Tan, 457 mm x 23 m, 0.05 mm	1	Roll
7000042362	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1120, Tan, 1372 mm x 23 m, 0.05 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape B1520

3M™ Cushion-Mount™ Plus Plate Mounting Tape B1520 is designed for mounting flexographic print plates to cylinders or sleeves, particularly the price-conscious challenges of short runs and frequent changeovers. This purple plate mounting sticky back foam tape provides high quality medium combination print.



- 0.51 mm double coated medium density purple foam tape
- Designed to meet basic print needs for short runs and frequent changeovers
- Ideal for printing combinations of solids and process with halftone dots

Product ID	Part Number	Product Name	MOQ	OU
7100247164	B1520457	3M™ Cushion-Mount™ Plus Plate Mounting Tape B1520, Purple, 457 mm x 33 m, 0.51 mm	1	Roll
7100247622	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape B1520, Purple, 1371 mm in x 33 m, 0.51 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape B1020

3M™ Cushion-Mount™ Plus Plate Mounting Tape B1020 is designed for mounting flexographic print plates to cylinders or sleeves, particularly the price-conscious challenges of short runs and frequent changeovers. This white plate mounting sticky back foam tape provides high quality standard combination print.



- 0.51 mm double coated standard density white foam tape
- Designed to meet basic print needs for short runs and frequent changeovers
- Ideal for printing combinations of solids and process with halftone dots

Product ID	Part Number	Product Name	MOQ	OU
7100247251	B1020457	3M™ Cushion-Mount™ Plus Plate Mounting Tape B1020, White, 457 mm x 33 m, 0.51 mm	1	Roll
7100247250	B10201372	3M™ Cushion-Mount™ Plus Plate Mounting Tape B1020, White, 1371 mm in x 33 m, 0.51 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape B1320

3M™ Cushion-Mount™ Plus Plate Mounting Tape B1320 is designed for mounting flexographic print plates to cylinders or sleeves, particularly the price-conscious challenges of short runs and frequent changeovers. This yellow plate mounting sticky back foam tape provides high quality medium soft combination print.

- 0.51 mm double coated medium soft density yellow foam tape
- Designed to meet basic print needs for short runs and frequent changeovers
- Ideal for printing combinations of solids and process with halftone dots



Product ID	Part Number	Product Name	MOQ	OU
7100246871	B1320457	3M™ Cushion-Mount™ Plus Plate Mounting Tape B1320, Yellow, 457 mm x 33 m, 0.51 mm	1	Roll
7100247163	B13201372	3M™ Cushion-Mount™ Plus Plate Mounting Tape B1320, Yellow, 1371 mm in x 33 m, 0.51 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape B1920

3M™ Cushion-Mount™ Plus Plate Mounting Tape B1920 is designed for mounting flexographic print plates to cylinders or sleeves, particularly the price-conscious challenges of short runs and frequent changeovers. This pink plate mounting sticky back foam tape provides high quality light medium combination print.

- 0.51 mm double coated light medium density pink foam tape
- Designed to meet basic print needs for short runs and frequent changeovers
- Ideal for printing combinations of solids and process with halftone dots



Product ID	Part Number	Product Name	MOQ	OU
7100247165	21920457	3M™ Cushion-Mount™ Plus Plate Mounting Tape B1920, Pink, 457 mm x 33 m, 0.51 mm	1	Roll
7100247166	B19201372	3M™ Cushion-Mount™ Plus Plate Mounting Tape B1920, Pink, 1371 mm in x 33 m, 0.51 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1820H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1820H. Our 0.51 mm blue, double coated foam tape which has the air release feature with high plate side adhesion. It is used for plates that contain mostly solids in a combination of solid and halftone images.

- Blue, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Firm



Product ID	Part Number	Product Name	MOQ	OU
7000115982	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1820H, Blue, 457 mm x 23 m, 0.5 mm	1	Roll
7000042388	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1820H, Blue, 1372 mm x 23 m, 0.5 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1720H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1720H. Our 0.51 mm teal, double coated foam tape has the air release feature with high plate side adhesion. It is used when you have slightly more solids in a combination of solid and halftone printing.



- Teal, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Medium firm

Product ID	Part Number	Product Name	MOQ	OU
7000042372	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1720H, Teal, 457 mm x 23 m, 0.5 mm	1	Roll
7000042369	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1720H, Teal, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1520H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1520H. Our 0.51 mm purple, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed printing with fine type reverses and expanded colour gamut.



- Purple, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Medium

Product ID	Part Number	Product Name	MOQ	OU
7000042386	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1520H, Purple, 457 mm x 23 m, 0.5 mm	1	Roll
7000042385	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1520H, Purple, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1020H

Mount your photopolimeric plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1020H. Our 0.51 mm white, double coated foam tape has the air release feature with high plate side adhesion. It is used for high quality combination jobs.



- White, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Standard density

Product ID	Part Number	Product Name	MOQ	OU
7000042357	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1020H, White, 457 mm x 23 m, 0.5 mm	1	Roll
7000042358	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1020H, White, 1372 mm x 23 m, 0.5 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1320H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1320H. Our 0.51 mm yellow, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed printing of combination work when halftone areas exceed solids.

- Yellow, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Medium soft



Product ID	Part Number	Product Name	MOQ	OU
7100152066	E1320H45	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1320H, Yellow, 457 mm x 23 m, 0.5 mm	3	Roll
7000042370	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1320H, Yellow, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1920H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1920H. Our 0.51 mm pink, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed when process and halftone images predominate.

- Pink, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Light medium



Product ID	Part Number	Product Name	MOQ	OU
7100152422	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1920H, Purple, 457 mm x 23 m, 0.5 mm	1	Roll
7100152421	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1920H, Purple, 1372 mm x 23 m, 0.5 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1220H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1220H. Our 0.51 mm orange, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed process work.

- Orange, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Light



Product ID	Part Number	Product Name	MOQ	OU
7000047432	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1220H, Orange, 457 mm x 23 m, 0.38 mm	3	Roll
7000124342	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1220H, Orange, 1372 mm x 23 m, 0.38 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1120H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1120H. Our 0.51 mm tan, double coated foam tape has the air release feature with high plate side adhesion. It is used for high quality process printing.




- Tan flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Soft/Process

Product ID	Part Number	Product Name	MOQ	OU
7000042749	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1120H, Tan, 457 mm x 23 m, 0.05 mm	1	Roll
7000042750	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1120H, Tan, 1372 mm x 23 m, 0.05 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1815

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1815. Our 0.38 mm blue, double coated foam tape has the air release feature with easy plate side removal. It is used for plates that contain mostly solids in a combination of solid and halftone images.




- Blue, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Firm

Product ID	Part Number	Product Name	MOQ	OU
7000042745	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1815, Blue, 457 mm x 23 m, 0.38 mm	1	Roll
7100011658	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1815, Blue, 1372 mm x 23 m, 0.38 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1715

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1715. Our 0.38 mm teal, double coated foam tape has the air release feature with easy plate side removal. It is used when you have slightly more solids in a combination of solid and halftone printing.



- Teal, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Medium firm

Product ID	Part Number	Product Name	MOQ	OU
7000042371	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1715, Teal, 457 mm x 23 m, 0.38 mm	3	Roll
7000042375	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1715, Teal, 1372 mm x 23 m, 0.38 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1515

Mount your photopolimeric plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1515. Our 0.38 mm white, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed printing with fine type reverses and expanded colour gamut.

- Purple, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Medium



Product ID	Part Number	Product Name	MOQ	OU
7000047429	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1515, Purple, 457 mm x 23 m, 0.38 mm	3	Roll
7000047430	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1515, Purple, 1372 mm x 23 m, 0.38 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1015

Mount your photopolimeric plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1015. Our 0.38 mm white, double coated foam tape has the air release feature with easy plate side removal. It is used for combination jobs.

- White, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Standard density



Product ID	Part Number	Product Name	MOQ	OU
7000042350	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1015, White, 457 mm x 23 m, 0.38 mm	1	Roll
7000042353	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1015, White, 1372 mm x 23 m, 0.38 mm	10	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1315

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1315. Our 0.38 mm yellow, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed printing of combination work when halftone areas exceed solids.

- Yellow flexo plate mounting tape provides air release feature
- 0.38 mm thickness
- Medium soft



Product ID	Part Number	Product Name	MOQ	OU
7000042752	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1315, Yellow, 457 mm x 23 m, 0.38 mm	1	Roll
7000042753	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1315, Yellow, 1372 mm x 23 m, 0.38 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1915

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1915. Our 0.38 mm pink, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed when process and halftone images predominate.



- Pink, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Light medium

Product ID	Part Number	Product Name	MOQ	OU
7000042376	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1915, Pink, 1372 mm x 23 m, 0.38 mm	1	Roll
7000042373	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1915, Tan, 457 mm x 23 m, 0.38 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1215

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1215. Our 0.38 mm orange, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed process work.



- Orange, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Light

Product ID	Part Number	Product Name	MOQ	OU
7000029057	E12151372	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1215, Orange, 1372 mm x 23 m	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1115

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1115. Our 0.38 mm tan, double coated foam tape has the air release feature with easy plate side removal. It is used for high quality process printing.



- Tan, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Soft/Process

Product ID	Part Number	Product Name	MOQ	OU
7000042360	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1115, Tan, 457 mm x 23 m, 0.38 mm	1	Roll
7000042359	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1115, Tan, 1372 mm x 23 m, 0.38 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1915H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1915H. Our 0.38 mm pink, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed when process and halftone images predominate.

- Pink, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Light medium




Product ID	Part Number	Product Name	MOQ	OU
7000047422	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1915H, Pink, 18 in x 25 yd	1	Roll
7000042747	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1915H, Pink, 1372 mm x 23 m	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1815H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1815H. Our 0.38 mm blue, double coated foam tape has the air release feature with high plate side adhesion. It is used for plates that contain mostly solids in a combination of solid and halftone images.

- Blue, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Firm




Product ID	Part Number	Product Name	MOQ	OU
7000047423	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1815H, Blue, 457 mm x 23 m, 0.38 mm	3	Roll
7000042748	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1815H, Blue, 1372 mm x 23 m, 0.38 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1715H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1715H. Our 0.38 mm teal, double coated foam tape has the air release feature with high plate side adhesion. It is used when you have slightly more solids in a combination of solid and halftone printing.

- Teal, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Medium firm



Product ID	Part Number	Product Name	MOQ	OU
7000047426	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1715H, Teal, 1372 mm x 23 m, 0.38 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1515H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1515H. Our 0.38 mm purple, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed printing with fine type reverses and expanded colour gamut.



- Purple, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Medium

Product ID	Part Number	Product Name	MOQ	OU
7000047431	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1515H, Purple, 457 mm x 23 m, 0.38 mm	1	Roll
7000042755	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1515H, Purple, 1372 mm x 23 m, 0.38 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1215H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1215H. Our 0.38 mm orange, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed process work.



- Orange, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Light

Product ID	Part Number	Product Name	MOQ	OU
7000047434	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1215H, Orange, 54 in x 25 yd	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1315H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1315H. Our 0.38 mm yellow, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed printing of combination work when halftone areas exceed solids.



- Yellow, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Medium soft

Product ID	Part Number	Product Name	MOQ	OU
7000122465	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1315H, Yellow, 457 mm x 23 m, 0.38 mm	1	Roll
7000122466	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1315H, Yellow, 1372 mm x 23 m, 0.38 mm	1	Roll

Paper and Print

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1115H

Mount your photopolymer plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1115H. Our 0.38 mm tan, double coated foam tape has the air release feature with high plate side adhesion. It is used for high quality process printing.

- Tan, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Soft/Process



Product ID	Part Number	Product Name	MOQ	OU
7000115869	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1115H, Tan, 457 mm x 23 m, 0.38 mm	3	Roll
7000042374	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1115H, Tan, 1372 mm x 23 m, 0.38 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1015H

Mount your photopolimeric plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1015H. Our 0.38 mm white, double coated foam tape has the air release feature with high plate side adhesion. It is used for combination jobs.

- White, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Standard density



Product ID	Part Number	Product Name	MOQ	OU
7000042354	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1015H, White, 457 mm x 23 m, 0.38 mm	1	Roll
7100152063	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1015H, White, 1372 mm x 23 m, 0.38 mm	1	Roll

3M™ Cushion-Mount™ Plus Plate Mounting Tape E1040

Mount your photopolimeric plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1040. Our 1.02 mm white, double coated foam tape has the air release feature with easy plate side removal. It is used for combination jobs.

- White, flexo plate mounting tape with air release feature adhesive
- 1.02 mm thickness
- Standard density



Product ID	Part Number	Product Name	MOQ	OU
7000049173	xxx	3M™ Cushion-Mount™ Plus Plate Mounting Tape E1040, White, 457 mm x 15.2 m, 1.0 mm	1	Roll



Packaging Systems

Packaging Systems

Packaging Tapes

Scotch® Pouch Tape 8241

Performance document control (pouch) tape on a roll.

- Bright orange border on all four sides and a transparent non-sticky rectangular window
- Safe application of packing slips and other documents to a wide variety of boxes and packaging
- Protects the document and tracks the package



Product ID	Part Number	Product Name	MOQ	OU
7100160307	xxx	Scotch® Pouch Tape 8241, Transparent, 150 mm x 66 m, 0.046 mm	12	Roll

Scotch® Pouch Tape 8242

Performance document control (pouch) tape on a roll which eliminates liners - helping to reduce the risk of accidents, improve productivity and generally improve the working environment.

- Bright orange border on all four sides and a transparent non-sticky rectangular window
- Safe application of packing slips and other documents to a wide variety of boxes and packaging
- Protects the document and tracks the package



Product ID	Part Number	Product Name	MOQ	OU
7100160319	xxx	Scotch® Pouch Tape 8242, Transparent, 150 mm x 66 m, 0.053 mm	12	Roll
7100160727	xxx	Scotch® Pouch Tape 8242, Transparent, 150 mm x 66 m, 0.066 mm	12	Roll

3M™ Carry Handle 8330

Our 3M™ Carry Handle 8330 transforms almost anything into a convenient, travel-friendly package. A durable plastic strip with adhesive at each end for adhering to both sides of a box or package creates a small padded loop which can support lifting of heavy & bulky products.

- Transform bulky purchases into travel-friendly packages
- Carry handles are easily applied at retail checkout
- Customize these handles with up to six colours for special promotions or UPC codes to spread the word about your business



Product ID	Part Number	Product Name	MOQ	OU
7100054963	xxx	3M™ Carry Handle Tape 8330, White, 35 mm x 584 mm x 152 mm	1	Case

Packaging Systems

3M™ Carry Handle 8310

Our 3M™ Carry Handle 8310 transforms almost anything into a convenient, travel-friendly package. A durable plastic strip with adhesive at each end for adhering to both sides of a box or package creates a small loop which can support up to 10 pounds.



- Transform bulky purchases into travel-friendly packages
- Carry handles are easily applied at retail checkout and can support up to 10 pounds
- Customize these handles with up to six colors for special promotions or UPC codes to spread the word about your business

Product ID	Part Number	Product Name	MOQ	OU
7100049685	xxx	3M™ Carry Handle 8310, White, 25 mm x 432 mm x 76 mm	1	Case

3M™ Carry Handle 8315

Our 3M™ Carry Handle 8315 transforms almost anything into a convenient, travel-friendly package. A durable plastic strip with adhesive at each end for adhering to both sides of a box or package creates a small loop which can support up to 15 pounds.



- Transform bulky purchases into travel-friendly packages
- Carry handles are easily applied at retail checkout and can support up to 15 pounds
- Customize these handles with up to six colors for special promotions or UPC codes to spread the word about your business

Product ID	Part Number	Product Name	MOQ	OU
7100050882	8315-1-3/8X23X6	3M™ Carry Handle 8315, White, 35 mm x 584 mm x 152 mm	1	Case

3M™ Carry Handle Tape 8346

Designed for smooth, efficient use with automated carry handle application equipment, 3M™ Carry Handle Tape 8346HP is a high-performance tape featuring a durable polyester film backing and an aggressive synthetic rubber adhesive especially suited for high shear performance carrying handles for items up to 20 lbs.



- Long, level-wound rolls are designed for smooth, efficient use with automatic carry handle application equipment
- Combined with a custom printed insert creates a convenient handle for carrying and transporting bundled items up to 20 pounds
- Unique adhesive construction with polyester backing allows you to create handle on automatic equipment

Product ID	Part Number	Product Name	MOQ	OU
7000095462	xxx	3M™ Carry Handle Tape 8346, Transparent, 25 mm x 800 m	12	Roll

Packaging Systems

3M™ Carry Handle Tape 9009HP

3M™ Carry Handle Tape 9009HP is a high performance tape featuring a durable ScotchPro™ film backing that is very strong in longitudinal direction and aggressive hot melt solvent-free adhesive, designed for use on automatic in-line and post oven carry handle applications.

- Designed for use on automatic in-line and post oven carry handle applications
- High Tensile Strength Mono-axially oriented polypropylene backing and specially formulated adhesive
- Excellent adhesion to most shrink film over wraps securing immediate and secure handle attachment

Product ID	Part Number	Product Name	MOQ	OU
7000095581	9009256500	3M™ Double Coated Tape 9009HP, Transparent, 25 mm x 6500 m	30	Roll

3M™ Carry Handle Tape 9009S

3M™ Carry Handle Tape 9009S is a high performance tape featuring a durable ScotchPro™ film backing that is very strong in longitudinal direction and a solvent (natural rubber/resin) adhesive, designed for use on automatic in-line and post oven carry handle applications.

- Designed for use on automatic in-line and post oven carry handle applications
- High Tensile Strength Mono-axially oriented polypropylene backing and specially formulated adhesive
- Excellent adhesion to most shrink film over wraps securing immediate and secure handle attachment

Product ID	Part Number	Product Name	MOQ	OU
7000095604	xxx	3M™ Double Coated Tape 9009, Clear, 25 mm x 6500 m	1	Roll

Packaging Systems

Box Sealing Tapes

Scotch® High Tack Box Sealing Tape 375+

Scotch® High Tack Box Sealing Tape 375+ is a high-performance packaging tape that securely closes a variety of heavy weight box materials, including recycled fiberboard. The strong adhesive securely seals packages to help prevent tampering and tape failure during moving, shipping and delivery. The polypropylene film backing is easy to unwind and resists abrasion, moisture, scuffing and edge tear.



- High-performance hot melt packaging tape for heavy duty applications
- Strong adhesive helps prevent tampering and tape failure during shipping and delivery
- High edge tear and split resistance for e-commerce and single-parcel shipments

Product ID	Part Number	Product Name	MOQ	OU
7100216187	37572914	Scotch® High Tack Box Sealing Tape 375+, Clear, 72 mm x 914 m	4	Roll
7100215092	3754850	Scotch® High Tack Box Sealing Tape 375+, Transparent, 48 mm x 50 m	36	Roll
7100215511	37548914	Scotch® High Tack Box Sealing Tape 375+, Transparent, 48 mm x 914 m	6	Roll
7100215467	3757250	Scotch® High Tack Box Sealing Tape 375+, Transparent, 72 mm x 50 m	24	Roll

Scotch® High Performance Box Sealing Tape 3705

Scotch® High Performance Box Sealing Tape 3705 is a high performance packaging tape with an extremely strong bi-axially oriented polypropylene strong film backing and a very high shear/tack solvent based natural rubber-resin adhesive.




- Protect your valuable and fragile goods
- Use in a wide range of demanding packaging applications
- Reduce the risk of product damage or box sealing failures

Product ID	Part Number	Product Name	MOQ	OU
7000095271	xxx	Scotch® High Performance Box Sealing Tape 3705, Transparent, 50 mm x 66 m	36	Roll
7000095275	xxx	Scotch® High Performance Box Sealing Tape 3705, Transparent, 50 mm x 660 m	6	Roll
7000095264	xxx	Scotch® High Performance Box Sealing Tape 3705, Transparent, 75 mm x 66 m	648	Roll

Packaging Systems

Scotch® High Performance Box Sealing Tape 375E

Scotch® High Performance Box Sealing Tape 375E is a high performance box sealing tape with a polypropylene film backing and hot melt solvent free (synthetic rubber-resin) adhesive. The Scotchpro™ polypropylene backing resists splitting when subjected to rough handling and absorbs impact shock.



- Absorbs impact shock
- Get high moisture, abrasion and split resistance
- Use on over-packed and heavy-weight packages for a tight seal

Product ID	Part Number	Product Name	MOQ	OU
7000095715	xxx	Scotch® High Performance Box Sealing Tape 375E, Brown, 50 mm x 66 m	36	Roll
7000095896	xxx	Scotch® High Performance Box Sealing Tape 375E, Brown, 75 mm x 66 m	24	Roll
7000035395	xxx	Scotch® High Performance Box Sealing Tape 375E, Brown, 150 mm x 990 m	54	Roll
7100144125	xxx	Scotch® High Performance Box Sealing Tape 375E, Transparent, 50 mm x 66 m	36	Roll
7000095435	xxx	Scotch® High Performance Box Sealing Tape 375E, Transparent, 50 mm x 100 m	36	Roll
7000095436	xxx	Scotch® High Performance Box Sealing Tape 375E, Transparent, 50 mm x 660 m	6	Roll
7000095434	xxx	Scotch® High Performance Box Sealing Tape 375E, Transparent, 50 mm x 990 m	6	Roll
7000095437	xxx	Scotch® High Performance Box Sealing Tape 375E, Transparent, 75 mm x 66 m	24	Roll
7000095631	xxx	Scotch® High Performance Box Sealing Tape 375E, Transparent, 75 mm x 990 m	4	Roll
7000095438	375150	Scotch® High Performance Box Sealing Tape 375E, Transparent, 150 mm x 990 m	2	Roll

Scotch® Box Sealing Tape 313

Scotch® Box Sealing Tape 313 closes a wide variety of medium weight box materials securely, including recycled liner paper and fiberboard. The backing of this value performance tape is crafted from polypropylene making it easy to handle and conformable around edges and on rough surfaces for a tight seal. The tape withstands cold temperatures and works well on boxes weighing up to 30 kg.



- High adhesion and holding power resists popping for a secure seal
- Suitable for hard to stick to surfaces and cold temperature applications
- Available with custom printing for security and/or branding


Product ID	Part Number	Product Name	MOQ	OU
7000095505	xxx	Scotch® Box Sealing Tape 313, Brown, 50 mm x 66 m, 0.065 mm	36	Roll
7000095669	xxx	Scotch® Box Sealing Tape 313, Brown, 50 mm x 66 m, 0.065 mm	36	Roll
7000095541	313501B	Scotch® Box Sealing Tape 313, Brown, 50 mm x 100 m, 0.065 mm	36	Roll
7000095670	xxx	Scotch® Box Sealing Tape 313, Clear, 50 mm x 66 m, 0.065 mm	36	Roll
7000095540	313501T	Scotch® Box Sealing Tape 313, Clear, 50 mm x 100 m, 0.065 mm	864	Roll
7000095567	xxx	Scotch® Box Sealing Tape 313, Clear, 50 mm x 132 m, 0.065 mm	36	Roll
7000095630	xxx	Scotch® Box Sealing Tape 313, Clear, 75 mm x 66 m, 0.065 mm	24	Roll
7000095504	xxx	Scotch® Box Sealing Tape 313, Transparent, 50 mm x 66 m, 0.065 mm	36	Roll
7000095582	xxx	Scotch® Box Sealing Tape 313, White, 50 mm x 100 m, 0.065 mm	36	Roll

Packaging Systems

Scotch® Performance Low Noise Box Sealing Tape 3707

Scotch® Performance Low Noise Box Sealing Tape 3707 is a performance box sealing tape with a polypropylene film backing and solvent (natural rubber-resin) adhesive. The Scotchpro™ polypropylene backing resists splitting when subjected to rough handling and absorbs impact shock.

- Reduce noise during application
- Get split resistance
- Absorbs impact shock



Product ID	Part Number	Product Name	MOQ	OU
7000095240	xxx	Scotch® Performance Low Noise Box Sealing Tape 3707, Transparent, 50 mm x 66 m	36	Roll

Scotch® Box Sealing Tape 6893

Seal your boxes and packages quickly and securely with Scotch® Box Sealing Tape 6893. Our strong, high performance, UPVC film backed tape features solvent natural rubber resin adhesive. It's hand tearable and designed for single strip closure.

- Seal and secure your boxes quickly and professionally
- Easily tear by hand
- Use in low temperatures, and in conditions where moisture and chemicals are present



Product ID	Part Number	Product Name	MOQ	OU
7000035368	xxx	Scotch® Box Sealing Tape 6893, Red, 19 mm x 66 m	96	Roll
7000095276	xxx	Scotch® Box Sealing Tape 6893, Red, 25 mm x 66 m	72	Roll
7000095272	xxx	Scotch® Box Sealing Tape 6893, Red, 50 mm x 66 m	36	Roll
7000035366	xxx	Scotch® Performance Coloured PVC Film Tape 6893, Red, 9 mm x 66 m	192	Roll
7000035367	xxx	Scotch® Performance Coloured PVC Film Tape 6893, Red, 12 mm x 66 m	144	Roll

Scotch® Performance PVC Box Sealing Tape 6890

Scotch® Performance PVC Box Sealing Tape 6890 is a performance tape with a PVC film backing and solvent (natural rubber resin) adhesive.

- Use for box sealing, combining, attaching, heat shrink sealing and bundling lightweight packages
- Eliminate the need for dispensers when tearing by hand
- Reduce noise level in the work area



Product ID	Part Number	Product Name	MOQ	OU
7000095238	xxx	Scotch® Performance PVC Box Sealing Tape 6890, Brown, 50 mm x 66 m	36	Roll
7000095286	xxx	Scotch® Performance PVC Box Sealing Tape 6890, Transparent, 50 mm x 66 m	36	Roll
7000095243	xxx	Scotch® Performance PVC Box Sealing Tape 6890, White, 50 mm x 66 m	36	Roll
7000095304	6890B150	Scotch® Performance PVC Box Sealing Tape 6890, White, 150 mm x 990 m	2	Roll

Packaging Systems

Scotch® High Performance Box Sealing Tape 3739

Scotch® Box Sealing Tape 3739 is a performance box sealing tape with a high strength polypropylene film backing and hot melt synthetic rubber-resin adhesive.



- Re-seal and package heavy weights of valuable goods
- Use for single strip closure of fibreboard boxes
- Performs well at all temperatures typically encountered by packaged products in shipping and storage environments

Product ID	Part Number	Product Name	MOQ	OU
7000095400	xxx	Scotch® High Performance Box Sealing Tape 3739, Brown, 50 mm x 66 m	36	Roll
7000095401	xxx	Scotch® High Performance Box Sealing Tape 3739, Brown, 50 mm x 132 m	36	Roll
7000095409	xxx	Scotch® High Performance Box Sealing Tape 3739, Brown, 50 mm x 990 m	6	Roll
7000095393	xxx	Scotch® High Performance Box Sealing Tape 3739, Brown, 75 mm x 66 m	792	Roll
7000095394	xxx	Scotch® High Performance Box Sealing Tape 3739, Brown, 75 mm x 990 m	144	Roll
7000095403	3739T50	Scotch® High Performance Box Sealing Tape 3739, Transparent, 50 mm x 66 m	36	Roll
7000095404	xxx	Scotch® High Performance Box Sealing Tape 3739, Transparent, 50 mm x 132 m	36	Roll
7000095417	xxx	Scotch® High Performance Box Sealing Tape 3739, Transparent, 50 mm x 660 m	6	Roll
7100146490	xxx	Scotch® High Performance Box Sealing Tape 3739, Transparent, 50 mm x 990 m	6	Roll
7000095395	xxx	Scotch® High Performance Box Sealing Tape 3739, Transparent, 75 mm x 66 m	24	Roll
7000095396	xxx	Scotch® High Performance Box Sealing Tape 3739, Transparent, 75 mm x 990 m	4	Roll
7000095412	xxx	Scotch® High Performance Box Sealing Tape 3739, Transparent, 150 mm x 990 m	72	Roll
7000095418	xxx	Scotch® High Performance Box Sealing Tape 3739, White, 50 mm x 66 m	36	Roll
7000095419	xxx	Scotch® High Performance Box Sealing Tape 3739, White, 50 mm x 132 m	864	Roll
7000095433	xxx	Scotch® High Performance Box Sealing Tape 3739, White, 50 mm x 990 m	6	Roll
7000095411	xxx	Scotch® High Performance Box Sealing Tape 3739, White, 150 mm x 990 m	72	Roll

Scotch® Box Sealing Tape 311+

Scotch® Box Sealing Tape 311+ is a high performance industrial packaging tape for box sealing, splicing, recoupage and other demanding packaging applications. It offers good performance in damp and cold shipping and storage environments, even in below freezing temperatures.



- High performance industrial packaging tape designed for cold and damp temperatures
- Great for box sealing, splicing, recoupage and demanding packaging applications
- Good performance over broad temperature ranges

Product ID	Part Number	Product Name	MOQ	OU
7100220442	xxx	Scotch® Box Sealing Tape 311+, Transparent, 48 mm x 66 m	36	Roll
7100220358	xxx	Scotch® Box Sealing Tape 311+, Transparent, 48 mm x 990 m	6	Roll

Packaging Systems

Scotch® Box Sealing Tape 309

Scotch® Box Sealing Tape 309 is a low noise general purpose packing tape suitable for light weight applications specifically in the food and beverage industry. The polypropylene film backing is easy to handle and resists abrasion, moisture and scuffing. The consistent and reliable backing easily conforms around edges and on rough surfaces for a tight seal.



- General purpose packaging tape suitable for light weight and price sensitive applications
- Acrylic adhesive with polypropylene backing delivers dependable, quality performance
- Resists UV rays without yellowing for archival applications

Product ID	Part Number	Product Name	MOQ	OU
7000095556	xxx	Scotch® Box Sealing Tape 309, Brown, 38 mm x 66 m	48	Roll
7000095502	xxx	Scotch® Box Sealing Tape 309, Brown, 50 mm x 66 m	36	Roll
7000095580	30975TAN	Scotch® Box Sealing Tape 309, Brown, 75 mm x 66 m	2	Roll
7000095555	xxx	Scotch® Box Sealing Tape 309, Transparent, 38 mm x 66 m	48	Roll
7000095501	xxx	Scotch® Box Sealing Tape 309, Transparent, 50 mm x 66 m	1	Roll
7000095558	xxx	Scotch® Box Sealing Tape 309, Transparent, 75 mm x 66 m	24	Roll

Packaging Systems

Scotch® Box Sealing Tape 371

Scotch® Box Sealing Tape 371 securely closes a wide variety of box and carton materials, including corrugated fiberboard. The moisture-resistant polypropylene backing resists abrasion, chemicals, and scuffing to hold strong throughout the shipping process. It easily conforms around edges and on rough surfaces to provide a lasting hold.



- Rubber resin adhesive sticks quickly to a variety of materials, including fiberboard
- Tape resists nicks, abrasions, moisture and scuffing for long lasting hold
- Backing conforms around edges and rough areas for a tight seal

Product ID	Part Number	Product Name	MOQ	OU
7000095343	xxx	Scotch® Box Sealing Tape 371, Brown, 38 mm x 66 m	48	Roll
7100135770	371B4866	Scotch® Box Sealing Tape 371, Brown, 48 mm x 66 m	36	Roll
7100135324	37150BR	Scotch® Box Sealing Tape 371, Brown, 50 mm x 66 m	36	Roll
7100135769	xxx	Scotch® Box Sealing Tape 371, Brown, 50 mm x 100 m	36	Roll
7100135326	xxx	Scotch® Box Sealing Tape 371, Brown, 50 mm x 132 m	36	Roll
7100135325	371B5099	Scotch® Box Sealing Tape 371, Brown, 50 mm x 990 m	6	Roll
7100144122	371B7566	Scotch® Box Sealing Tape 371, Brown, 75 mm x 66 m	24	Roll
7100144121	xxx	Scotch® Box Sealing Tape 371, Brown, 75 mm x 132 m	24	Roll
7100135323	xxx	Scotch® Box Sealing Tape 371, Brown, 75 mm x 660 m	4	Roll
7000095375	37175BR	Scotch® Box Sealing Tape 371, Brown, 75 mm x 990 m	4	Roll
7100144123	371T2566N	Scotch® Box Sealing Tape 371, Transparent, 25 mm x 66 m	72	Roll
7000035373	xxx	Scotch® Box Sealing Tape 371, Transparent, 38 mm x 66 m	48	Roll
7100135347	37138TR990	Scotch® Box Sealing Tape 371, Transparent, 38 mm x 990 m	8	Roll
7100135750	371T4866N	Scotch® Box Sealing Tape 371, Transparent, 48 mm x 66 m	36	Roll
7100135773	37148T	Scotch® Box Sealing Tape 371, Transparent, 48 mm x 990 m	6	Roll
7100135318	37150TR	Scotch® Box Sealing Tape 371, Transparent, 50 mm x 66 m	36	Roll
7100135321	3715010T	Scotch® Box Sealing Tape 371, Transparent, 50 mm x 100 m	36	Roll
7100135322	xxx	Scotch® Box Sealing Tape 371, Transparent, 50 mm x 132 m	36	Roll
7100135315	371T5099	Scotch® Box Sealing Tape 371, Transparent, 50 mm x 990 m	6	Roll
7100135319	3715015T	Scotch® Box Sealing Tape 371, Transparent, 50 mm x 1500 m	6	Roll
7000035376	37175TR	Scotch® Box Sealing Tape 371, Transparent, 75 mm x 66 m	24	Roll
7100144147	xxx	Scotch® Box Sealing Tape 371, Transparent, 75 mm x 132 m	24	Roll
7100135510	37175660TR	Scotch® Box Sealing Tape 371, Transparent, 75 mm x 660 m	4	Roll
7100144124	371T759	Scotch® Box Sealing Tape 371, Transparent, 75 mm x 990 m	4	Roll
7000095489	xxx	Scotch® Box Sealing Tape 371, White, 48 mm x 132 m	36	Roll
7000035377	xxx	Scotch® Box Sealing Tape 371, White, 50 mm x 66 m	36	Roll
7000095376	xxx	Scotch® Box Sealing Tape 371, White, 50 mm x 100 m	36	Roll
7000095370	xxx	Scotch® Box Sealing Tape 371, White, 50 mm x 132 m	36	Roll
7000095378	xxx	Scotch® Box Sealing Tape 371, White, 50 mm x 990 m	216	Roll

Packaging Systems

Tartan™ Box Sealing Tape 305

Tartan™ Box Sealing Tape 305 is a low noise light duty packaging tape suitable for light weight applications specifically in the food and beverage industry. The polypropylene film backing is easy to handle and resists abrasion, moisture and scuffing. The consistent and reliable backing easily conforms around edges and on rough surfaces for a tight seal.



- General purpose packaging tape suitable for light weight and price sensitive applications
- Acrylic adhesive with polypropylene backing delivers dependable, quality performance
- Resists UV rays without yellowing for archival applications

Product ID	Part Number	Product Name	MOQ	OU
7000095639	xxx	Tartan™ Box Sealing Tape 305, Brown, 50 mm x 66 m	36	Roll
7000095640	xxx	Tartan™ Box Sealing Tape 305, Transparent, 50 mm x 66 m	36	Roll

Tartan™ Box Sealing Tape 369

Tartan™ Box Sealing Tape 369 is a general purpose packing tape ideal for non-critical box sealing applications. The polypropylene film backing is easy to unwind and resists abrasion, moisture and scuffing. The backing easily conforms around edges and on rough surfaces for a tight seal.



- General purpose packaging tape for light-duty applications on a wide range of materials
- High edge tear and split resistance ideal for general purpose applications
- Polypropylene backing with synthetic rubber adhesive delivers conformability under stress

Product ID	Part Number	Product Name	MOQ	OU
7100135774	369M4866	Tartan™ Box Sealing Tape 369, Brown, 48 mm x 66 m	36	Roll
7100135749	369M4813	Tartan™ Box Sealing Tape 369, Brown, 48 mm x 132 m	36	Roll
7100137072	xxx	Tartan™ Box Sealing Tape 369, Brown, 50 mm x 66 m	36	Roll
7100135754	xxx	Tartan™ Box Sealing Tape 369, Brown, 50 mm x 132 m	36	Roll
7100135752	369T4866	Tartan™ Box Sealing Tape 369, Transparent, 48 mm x 66 m	36	Roll
7100135755	xxx	Tartan™ Box Sealing Tape 369, Transparent, 48 mm x 132 m	36	Roll
7100135746	xxx	Tartan™ Box Sealing Tape 369, Transparent, 48 mm x 990 m	6	Roll
7100135742	xxx	Tartan™ Box Sealing Tape 369, Transparent, 50 mm x 66 m	36	Roll
7100135745	xxx	Tartan™ Box Sealing Tape 369, Transparent, 50 mm x 132 m	36	Roll
7100135743	xxx	Tartan™ Box Sealing Tape 369, Transparent, 50 mm x 990 m	6	Roll
7100135744	xxx	Tartan™ Box Sealing Tape 369, Transparent, 50 mm x 1500 m	6	Roll

Packaging Systems

Scotch® Performance Box Sealing Tape 3444

Seal cartons by using Scotch® Performance Box Sealing Tape 3444. Our sealing tape is made from non-silicone flat back impregnated paper, coated with a natural rubber adhesive. It sticks to a wide variety of surfaces.



- Apply to carton sealing applications
- Use as a single strip closure of lightweight boxes, repaired and miscellaneous packaging
- Get non-silicone flat-back impregnated paper, coated with a high tack, natural rubber adhesive

Product ID	Part Number	Product Name	MOQ	OU
7100146144	xxx	Scotch® Performance Box Sealing Tape 3444, 50 mm x 500 m	288	Roll
7100146500	xxx	Scotch® Performance Box Sealing Tape 3444, Brown, 50 mm x 50 m	36	Roll
7100146162	xxx	Scotch® Performance Box Sealing Tape 3444, Brown, 75 mm x 50 m	24	Roll
7100272109	xxx	Scotch® Performance Box Sealing Tape 3444, Brown, 75 mm x 500 m	192	Roll
7100146166	xxx	Scotch® Performance Box Sealing Tape 3444, Brown, 150 mm x 500 m	96	Roll

Scotch® Reclosable Acrylic Tape 8369

Scotch® Reclosable Acrylic Tape 8369 is a low adhesion tape to allow closure and reclosing of food packaging bags.

- Suitable for machine miter making.
- Low adhesion tape
- Closure and reclosing of food packaging bags

Product ID	Part Number	Product Name	MOQ	OU
7000095713	xxx	Scotch® Reclosable Acrylic Tape 8369, Clear, 25 mm x 330 m	1	Roll
7000095714	xxx	Scotch® Reclosable Acrylic Tape 8369, Clear, 60 mm x 330 m	225	Roll

Scotch® Stretchable Tape 8884

Constructed with a specialized, transparent backing, Scotch® Stretchable Tape 8884 is designed to contain and secure pallets for shipping. It is coated with a synthetic rubber adhesive that removes cleanly when stretch over labels.



- Special polypropylene film backing provides 650% stretch factor allowing a 55 meter roll to yield 357 meters of tape
- Adhesive removes cleanly when stretched without damaging carton graphics or shipping instructions
- Sustainable solution results in less waste versus traditional shrink wrap

Product ID	Part Number	Product Name	MOQ	OU
7000048602	xxx	Scotch® Stretchable Tape 8884, Clear, 36 mm x 55 m, 0.13 mm	24	Roll

■ Packaging Systems

Scotch® Stretchable Tape 8886

Constructed with a specialized, transparent backing, Scotch® Stretchable Tape 8886 is designed to contain and secure pallets for shipping. It is coated with a synthetic rubber adhesive that removes cleanly when stretched over labels.

- Special polypropylene film backing provides 650% stretch factor allowing a 55 meter roll to yield 357 meters of tape
- Easily bolts to case sealer for simple installation
- Offers transition from existing conveyor lines in and out of case sealer



Product ID	Part Number	Product Name	MOQ	OU
7100025020	xxx	Scotch® Stretchable Tape 8886, Clear, 36 mm x 55 m, 0.17 mm	24	Roll
7100026479	xxx	Scotch® Stretchable Tape 8886, Clear, 36 mm x 500 m, 0.17 mm	6	Roll

Packaging Systems

Hang Tabs

3M™ Hang Tab 1074

We designed 3M™ Hang Tab 1074 to quickly stick to a product surface and allow that product to hang from a peg for display. These hang tabs are great for hanging shrink-wrapped packages and for in-store repair of damaged packaging, such as torn punches in chipboard header cards.



- Sticks instantly to shrink-wrapped packages, cartons, and product surfaces
- Polyester backing resists abrasion, splitting and edge tear
- Clear tape lets packaging copy and graphics show through

Product ID	Part Number	Product Name	MOQ	OU
7000051823	xxx	3M™ Hang Tabs 1074, Transparent, 25 mm x 50 mm	1	Pack

3M™ Hang Tab 1075

3M™ Hang Tab 1075 is a great solution for hanging product in retail locations and for in-store repair of damaged packaging. Featuring a clear polyester backing, 3M™ Hang Tab 1075 is abrasion, split and edge tear resistant while allowing important packaging copy and graphics to show through. It includes a delta-hole configuration to work with wider double-wire pegs.



- Clear pads do not obscure packaging graphics. Pre-cut, bendable tab format for convenience and ease of use.
- Padded for convenient carrying and „dispenser-less“ taping -no cutting tool required
- Clear tape won't obscure packaging copy, brand messaging or graphics

Product ID	Part Number	Product Name	MOQ	OU
7000001899	xxx	3M™ Hang Tabs 1075, Transparent, 50 mm x 50 mm	10	Pack

3M™ Hang Tab 1076

3M™ Hang Tab 1076 is a great solution for hanging product in retail locations and for in-store repair of damaged packaging. Featuring a clear polyester backing, 3M™ Hang Tab 1076 is abrasion, split and edge tear resistant while allowing important packaging copy and graphics to show through. It includes a round-hole configuration to work with single pegs.



- Clear pads do not obscure packaging graphics. Pre-cut, bendable tab format for convenience and ease of use.
- Strong polyester backing resists abrasion, tearing and splitting.
- Aggressive hot melt rubber resin adhesive sticks to a variety of surfaces, including shrink wrapped packages and chipboard header cards.

Product ID	Part Number	Product Name	MOQ	OU
7000051800	xxx	3M™ Hang Tabs 1076, Transparent, 50 mm x 50 mm	10	Pack



Films

Surface Protection Films

3M™ Industrial Protective Film 7070UV

3M™ Industrial Protective Film 7070UV is an abrasion resistant, pressure sensitive adhesive backed film product designed to protect multiple industrial surfaces from damage caused by abrasion, scratching, erosion, UV and minor impacts. This rugged clear film is durable, flexible, and able to conform to curved surfaces while being easy to apply.



- Abrasion-resistant polyurethane backing resists punctures and tearing
- Creates a highly durable, transparent shield without obscuring the surface design
- Features UV, weather and impact resistance for long-lasting performance

Product ID	Part Number	Product Name	MOQ	OU
7100089302	xxx	3M™ Industrial Protective Film 7070UV, Transparent, 1219 vm x 33 m, 0.2 mm	1	Roll



Tools & Equipment

Tools & Equipment

Tape Applicators, Dispensers & Kits

3M™ Adjustable Paint Masking Applicator

3M™ Adjustable Paint Masking Applicator is used to apply Scotch® Fine Line tapes on complex surfaces, such as the roofline or rear hatch of a vehicle. Designed especially for automotive original equipment manufacturers, these applicators are lightweight, intuitive and easy to handle, with an integrated cutter to help increase productivity.

- Precision on any line. Adjusts to meet a range of tape widths and application needs. Magnetic guidance, along with the integrated cutter ensures you apply the exact line you need every time.
- Fast application. Integrated cutting, clean web handling, and a thin profile created from an Automotive manufacturer's point of view.
- Robust in a tough environment. Made from impact resistant composite materials, it can stand up to manufacturing environments. A magnet embedded in the handle makes for ease of storage. All without sacrificing performance.




Product ID	Part Number	Product Name	MOQ	OU
7100259560	xxx	3M™ Adjustable Paint Masking Applicator, ACL21	1	Each
7100259561	xxx	3M™ Adjustable Paint Masking Applicator, ACR21	1	Each
7100260574	xxx	3M™ Adjustable Paint Masking Applicator, DDR21	1	Each
7100259562	xxx	3M™ Adjustable Paint Masking Applicator, DDL21	1	Each

Scotch® Box Sealing Tape Dispenser H128

Our Scotch® Box Sealing Tape Dispenser H128 is a compact, heavy-duty steel dispenser designed for box and carton sealing. This compact dispenser gives you a quick and easy method for dispensing pressure sensitive tape directly from the roll.

- Heavy-duty construction for for tough work environments
- Hand-held tape design is comfortable to use
- Designed to provide tighter, more precise seals



Product ID	Part Number	Product Name	MOQ	OU
7000004797	xxx	Scotch® Box Sealing Tape Dispenser H128, 50 mm	6	Each

Scotch® Low Noise Tape Dispenser H150

The Scotch® Low Noise Tape Dispenser H150 is comfortable, lightweight hand dispenser specifically designed for Use in Noise Sensitive Areas.

- Operates smoothly and quietly, making it usable in noise sensitive places
- Pistol-grip style allows easy one-hand operation
- Dispenses rolls up to 2 inches (48/50 mm) wide



Product ID	Part Number	Product Name	MOQ	OU
7000056829	xxx	Scotch® Low Noise Tape Dispenser H150, Grey, 48 mm	6	Each
7000080606	xxx	Scotch® Low Noise Tape Dispenser H150, Grey, 50 mm maxi	6	Each
7000095479	xxx	Scotch® Low Noise Tape Dispenser H150, W&M Pack	6	Each

Tools & Equipment

Scotch® Low Noise Tape Dispenser H153

The Scotch® Low Noise Tape Dispenser H153 is a comfortable, lightweight hand dispenser specifically designed to operate smoothly and quietly for Noise Sensitive Places.

- Operates smoothly and quietly, making it usable in noise sensitive places
- Pistol-grip style allows easy one-hand operation
- Dispenses rolls up to 3 inches (72/75 mm) wide



Product ID	Part Number	Product Name	MOQ	OU
7000056830	xxx	Scotch® Low Noise Tape Dispenser H153, 75 mm, Type 19800	6	Each

Scotch® Box Sealing Tape Dispenser H180

Scotch® Box Sealing Tape Dispenser H180 is a portable, hand-held tape dispenser. This box sealing tape dispenser comes with a pistol-grip design for easy application. Tack, roll, buff and tear in one fluid motion. The lightweight and rugged construction of this box tape dispenser creates a durable, yet portable, tool for sealing, combining, reinforcing and bundling.

- One-hand, pistol-grip design allows for easy application
- Plastic and metal construction creates a rugged and durable tool
- Lightweight dispenser provides a portable solution



Product ID	Part Number	Product Name	MOQ	OU
7000146617	xxx	Scotch® Box Sealing Tape Dispenser H180, Brown/Grey, 50 mm	1	Each
7000146616	xxx	Scotch® Box Sealing Tape Dispenser H180, Bulk	20	Each

Scotch® Box Sealing Tape Dispenser H183

Scotch® Box Sealing Tape Dispenser H183 has a pistol-grip design that allows the operator to apply, cut, and buff up to a 3 inch wide tape in an easy, one-hand motion.

- Pistol-grip style allows easy one-hand operation
- Built to dispense wider tapes up to 3-inch/72mm wide
- Lightweight, hand-held dispenser is easy to control



Product ID	Part Number	Product Name	MOQ	OU
7000031099	xxx	Scotch® Box Sealing Tape Dispenser H183, 76 mm	5	Each

Scotch® Packaging Tape Dispenser D250

Scotch® Packaging Tape Dispenser D250 is a very handy dispenser. Suitable for intensive use.

- Designed for general and primary packaging
- Suitable for intensive use



Product ID	Part Number	Product Name	MOQ	OU
7000095481	xxx	Scotch® Packaging Tape Dispenser D250	25	Each

Tools & Equipment

Scotch® ATG 700 Adhesive Transfer Tape Gun

3M™ Scotch® ATG Adhesive Applicators apply adhesive transfer tape in a quick, easy, single handed operation. These lightweight applicators are ideal for use on small and medium assembly jobs as well as light and heavy duty industrial applications.

- Applies adhesive while removing and rewinding liner back into the applicator to eliminate clean-up
- Provide controlled one-step application with the touch of a finger
- Covered gears minimize applicator jams



Product ID	Part Number	Product Name	MOQ	OU
7000031200	xxx	Scotch® ATG Adhesive Transfer Tape Gun ATG700, Yellow, 6.4 mm Adapter, Model 19600	6	Each
7000031204	xxx	Scotch® ATG Adhesive Transfer Tape Gun ATG700, Yellow, Applicator, Model 19600	6	Each

Manual Applicators

3M™ Scotch-Weld™ EPX Manual Dispenser and Applicators

Manual applicator for dispensing EPX adhesives in 38 and 50 ml cartridges supplied with two plungers for 1:1 / 2:1 and 10:1 adhesives.

- Dispenses two-component 3M™ Scotch-Weld™ Structural Adhesives
- Offers take-it-to-the-job convenience without the need for air hoses or electrical cords
- Ensures correct mix ratio during dispensing; no need to weigh components



Product ID	Part Number	Product Name	MOQ	OU
7100244651	xxx	3M™ Scotch-Weld™ EPX Manual Dispenser and Applicators, 400 ml	1	Each
7100244652	xxx	3M™ Scotch-Weld™ EPX Manual Dispenser and Applicators, 490 ml	1	Each
7100205939	xxx	3M™ Scotch-Weld™ EPX Manual Dispenser and Applicators, Applicator w Plungers	1	Each

Tools & Equipment

Pneumatic Applicators

3M™ Scotch-Weld™ EPX Pneumatic Applicator

Quickly and easily metre, mix and apply two part adhesives with 3M™ Scotch-Weld™ EPX Pneumatic Applicator. Our applicator is designed to efficiently apply 3M™ Scotch-Weld™ Structural Adhesive Duo-Pak Cartridges for fast and simple applications using a pneumatic connection.

- Quickly and easily metre, mix and dispense two part adhesives
- Use with 3M™ Scotch-Weld™ Structural Adhesive Duo-Pak Cartridges
- Pistol grip provides comfortable handling and precise control



Product ID	Part Number	Product Name	MOQ	OU
7100230151	xxx	3M™ Scotch-Weld™ EPX DP2X Pneumatic Applicator 400 ml	1	Each
7100147720	xxx	3M™ Scotch-Weld™ EPX Pneumatic Applicator 10:1, 45 ml, DP2-50-400		Each
7000070273	xxx	3M™ Scotch-Weld™ EPX Pneumatic Applicator Dispenser, 1:1/2:1, 50 ml	1	Bottle
7100244653	xxx	3M™ Scotch-Weld™ EPX Pneumatic Applicator, Black, 490 mL	1	Each
7000062908	xxx	3M™ Scotch-Weld™ EPX™ Pneumatic Applicator, 490 ml, DP400-100-10		Each
7000110542	xxx	3M™ Scotch-Weld™ EPX™ Pneumatic Applicator, Large, DP 400-85-01-A1		Each



Labels

Label Stock

3M™ Overlamine Label Material 7732FL

3M™ Overlamine Label Material 7732FL utilizes a mat polyester film that is recommended for optimum durability and outdoor UV exposure. 3M™ Adhesive 400 offers excellent low temperature performance and long term aging for resistance to yellowing in outdoor applications.



- Labels for protective overlamine applications
- Offers UV resistance and helps prevent colour fading
- Facestock resists abrasion, scuffs and weathering

Product ID	Part Number	Product Name	MOQ	OU
7100009949	xxx	3M™ Overlamine Label Material 7732FL, Matte Clear Polyester, 1372 mm, Config roll	1	Roll

3M™ Overlamine Label Material 7731FL

3M™ Overlamine Label Material 7731FL utilizes a polyester film that is recommended for optimum durability and outdoor UV exposure. 3M™ Adhesive 400 offers excellent low temperature performance and long term aging for resistance to yellowing in outdoor applications.



- Labels for protective overlamine applications
- Offers UV resistance and helps prevent colour fading
- Facestock resists abrasion, scuffs and weathering

Product ID	Part Number	Product Name	MOQ	OU
7100003571	7731FLCONFIG	3M™ Overlamine Label Material 7731FL, Clear, Config roll	1	Roll

3M™ Films & Liners Label Materials

3M™ Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.



- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

Product ID	Part Number	Product Name	MOQ	OU
7000116100	xxx	3M™ Films & Liners Label Materials G62SB, 1500 mm x 500 m, MSPET50 250E 65WG	1	Roll
7100104746	xxx	3M™ Films & Liners Label Materials, G37VH T/S PT50MW/FP400/90WG	1	Roll
7100138065	xxx	3M™ Polyester Label Material 7879EN, PET75-350E/150LK 500MM x 410M, 2 rolls per pallet	15	Roll
7100104690	G61SBCONFIGO	3M™ Polyester Label Material G61SB, White, Config Roll	1	Roll
7100104691	xxx	3M™ Polyester Label Material G62SB, Silver, Config roll	1	Roll

Labels

3M™ Polyolefin Label Material FP0354EG

3M™ Durable Label Material FP0354EG is a high performance material that offers excellent thermal stability and moisture resistance.

- Good moisture and humidity resistance
- Good thermal stability
- Designed for automotive applications



Product ID	Part Number	Product Name	MOQ	OU
7100104648	FP0354EGCONFIG	3M™ Polyolefin Label Material FP0354EG, White Matte, 1372 mm, Config roll	1	Roll

3M™ Removable Label Material FM01972

3M™ Durable Label Material FM01972 is a durable, high performance material that offers excellent thermal stability. This polyester label product utilizes 3M™ Adhesive R3500, which is designed for use on smooth surfaces such as glass, metal and plastic (including polystyrene) and offers excellent UV resistance, good initial tack, and long term adhesion with clean removability and is an excellent alternative to static cling.

Note: As a removable adhesive, performance may vary depending upon the substrate to which it is applied. Therefore, extensive testing should be conducted prior to use and textured surfaces should be avoided. Not appropriate for children's toy or sticker applications.

- Good initial tack
- Long term adhesion with clean removability
- Repositionable



Product ID	Part Number	Product Name	MOQ	OU
7100011840	xxx	3M™ Removable Label Material FM01972, White Matte, 1372 mm, Config roll	1	Roll

3M™ Removable Label Material FM1542

3M™ Clear Polyester Durable Label Material FM1542 is a durable, high performance material that offers excellent thermal stability and moisture resistance.

- Good initial tack
- Long term adhesion with clean removability
- Repositionable



Product ID	Part Number	Product Name	MOQ	OU
7100073285	FM1542CONFIG	3M™ Removable Label Material FM1542, Clear, 1372 mm, Config roll	1	Roll

3M™ Sheet Label Material 7903FL

3M™ Sheet Label Material 7903FL is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Facestock for 3M™ Sheet Label Material 7903FL, is print treated for ink anchorage
- Liner provides easy sheet processing and is designed for layflat applications that require domed decal moulding
- 3M™ Sheet Label Material 7903FL is UL recognized (File MH11410) and CSA accepted (File 99316). See the UL and CSA listings for details

Product ID	Part Number	Product Name	MOQ	OU
7100013330	xxx	3M™ Sheet and Screen Label Material 7903FL, Bright Silver Polyester, Config Roll	1	Roll

3M™ Performance Paper Label Material 7000

3M™ Performance Paper Label Material 7000 provides excellent resistance to flagging on small diameter vials.

- Facestock is ideal for traditional forms of press printing and write-on variable information
- Designed to survive autoclaving, ETO and gamma sterilization while adhered to most surfaces
- Meets many pharmaceutical industry or manufacturer specifications



Product ID	Part Number	Product Name	MOQ	OU
7100013721	7000CONFIG	3M™ Performance Paper Label Material 7000, White Glossy, 1524 mm, Config roll	1	Roll

3M™ Tamper Evident Label Material 7866

3M™ Tamper Evident Label Material 7866 is a gloss white top coated polyester label stock suitable for the production of electronically generated alphanumeric or bar code labels via a thermal transfer printer. The product is Tamper indicating, ideal for security labelling

- Designed for a range of labelling applications where tamper-resistance is important
- Destructible and non-destructible facestocks include paper, vinyl, acetate and polyester for reliable use and processing
- Range of acrylic adhesives is formulated for strength, tack and clarity on a variety of surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100010005	7866CONFIG	3M™ Tamper Evident Label Material 7866, White VOID Polyester Glossy, 1372 mm, Config roll	1	Roll
7000116176	xxx	3M™ Tamper Evident Label Material 7866, White, 152 mm x 508 m, 0.05 mm	1	Roll
7000042399	xxx	3M™ Tamper Evident Label Material 7866, White, 610 mm x 508 m, 0.05 mm	1	Roll

Labels

3M™ Tamper Evident Label Material 7380

3M™ Void Polyester Durable Label Material 7380 is a Tamper indicating material designed to provide a VOID message in the facestock when removal is attempted.

- Designed for a range of labelling applications where tamper-resistance is important
- Facestocks designed for reliable use and processing
- Acrylic adhesive is formulated for strength, tack and clarity on a variety of surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100011792	7380CONFIG	3M™ Tamper Evident Label Material 7380, White VOID Polyester Matte, 1372 mm, Config roll	1	Roll

3M™ Thermal Transfer Label Materials

Our 3M™ Thermal Transfer Label Materials are versatile and durable label stocks. They provide excellent thermal stability and moisture resistance for use in demanding applications, such as bar code tracking. The adhesive on many labels offers excellent clarity and good initial tack to help improve the finished label.

- Offers excellent thermal stability and moisture resistance
- Versatile materials produced for use in a variety of applications
- Adhesive offers excellent clarity and good initial tack to help improve finished label



Product ID	Part Number	Product Name	MOQ	OU
7100152597	xxx	3M™ Cast Vinyl Label Material 3690-906E+, Grey Glossy, Roll, Config	1	Roll
7100104677	xxx	3M™ Polyester Label Material 7871EC, White, Roll, Config	1	Roll
7100144517	xxx	3M™ Polyester Label Material 7871EJ, 1500 mm x 200 m	1	Roll
7100174278	xxx	3M™ Scotchcal™ Performance Label Material 3690ED (SE)+, White Matte, 1220 mm x 250 m	2	Roll
7100174274	xxx	3M™ Scotchcal™ Thermal Transfer Printable Label Material 3690E DSL+, White Glossy, 1220 mm x 250 m	2	Roll
7100174311	xxx	3M™ Thermal Transfer Label Material 2901B+, Orange, 1220 mm x 250 m	2	Roll
7100224763	xxx	3M™ Thermal Transfer Label Material 3669C, Clear, 1220 mm x 100 m	5	Roll
7100174279	xxx	3M™ Thermal Transfer Label Material 3690-943A+, Black, 1220 mm x 50 m	10	Roll
7100174295	xxx	3M™ Thermal Transfer Label Material 3690-1403E+, White, 1220 mm x 50 m	10	Roll
7100174294	xxx	3M™ Thermal Transfer Label Material 3690-1403E+, White, 1220 mm x 250 m	2	Roll
7100174309	xxx	3M™ Thermal Transfer Label Material 3690B-10BF+, White Glossy, 1220 mm x 50 m	10	Roll
7100226149	3690SECONFIG	3M™ Thermal Transfer Label Material 3690SE+, White Glossy, Roll, Config	1	Roll
7100174286	xxx	3M™ Thermal Transfer Label Material 3692-1802BDL+, Yellow Glossy, 1220 mm x 50 m	10	Roll
7100174304	xxx	3M™ Thermal Transfer Label Material 3698E+, Silver, 152 mm x 250 m, 0.05 mm	1	Roll
7100174265	xxx	3M™ Thermal Transfer Label Material 3698E+, Silver, 305 mm x 500 m, 0.05 mm	4	Roll
7100174264	xxx	3M™ Thermal Transfer Label Material 3698E+, Silver, 610 mm x 500 m, 0.05 mm	2	Roll
7100174263	xxx	3M™ Thermal Transfer Label Material 3698E+, Silver, 1220 mm x 250 m, 0.05 mm	1	Roll
7100181130	3698E+CONFIG	3M™ Thermal Transfer Label Material 3698E+, Silver, Config Roll	1	Roll
7100174267	xxx	3M™ Thermal Transfer Label Material 3698ED+, Silver mat, 610 mm x 500 m, 0.05 mm	1	Roll
7100174266	xxx	3M™ Thermal Transfer Label Material 3698ED+, Silver mat, 1220 mm x 250 m, 0.05 mm	1	Roll
7000043115	xxx	3M™ Thermal Transfer Label Material 3922, White, 610 mm x 300 m, 0.05 mm	1	Roll
7100104576	xxx	3M™ Thermal Transfer Label Material 3922, White, Jumbo 1220 mm, Config Roll	1	Roll
7000068217	xxx	3M™ Thermal Transfer Label Material 3922DSL, Tan, 1220 mm x 300 m, 0.05 mm	2	Roll

Labels

3M™ Thermal Transfer Label Materials

Our 3M™ Thermal Transfer Label Materials are versatile and durable label stocks. They provide excellent thermal stability and moisture resistance for use in demanding applications, such as bar code tracking. The adhesive on many labels offers excellent clarity and good initial tack to help improve the finished label.



- Offers excellent thermal stability and moisture resistance
- Versatile materials produced for use in a variety of applications
- Adhesive offers excellent clarity and good initial tack to help improve finished label

Product ID	Part Number	Product Name	MOQ	OU
7000068783	xxx	3M™ Thermal Transfer Label Material 3922DSL, White, 152 mm x 300 m, 0.05 mm	1	Roll
7000043112	xxx	3M™ Thermal Transfer Label Material 3922DSL, White, 610 mm x 300 m, 0.05 mm	1	Roll
7100104663	7808ECONFIG	3M™ Thermal Transfer Label Material 7808E, Silver, Config Roll	1	Roll
7000116118	xxx	3M™ Thermal Transfer Label Material 7872EC, Platinum, 150 mm x 508 m, 0.05 mm	1	Roll
7000116058	xxx	3M™ Thermal Transfer Label Material 7872EC, Platinum, 1500 mm x 500 m, 0.05 mm	1	Roll
7100147820	xxx	3M™ Thermal Transfer Label Material 7876EC, 1500 mm x 250 m	1	Roll
7100024176	xxx	3M™ Thermal Transfer Label Material 7879EJ, Silver Matt, 1500 mm x 500 m, 0.081 mm	1	Roll
7100104656	76500CONFIG	3M™ Thermal Transfer Label Material 76500, Clear, Config Roll	1	Roll
7100104658	76615CONFIG	3M™ Thermal Transfer Label Material 76615, White, Config Roll	1	Roll
7100104695	76622CONFIG	3M™ Thermal Transfer Label Material 76622, White, Config Roll	1	Roll
7100104728	xxx	3M™ Thermal Transfer Label Material 76751C, Silver matte, Config roll	1	Roll
7100104662	76751S CONFIG	3M™ Thermal Transfer Label Material 76751S, Silver, Config Roll	1	Roll
7100185365	xxx	3M™ Thermal Transfer Label Material 76999, Jumbo 1220 mm, Configurable Rolls	1	Roll
7100104762	92048CONFIG	3M™ Thermal Transfer Label Material 92048, Silver, Aceton Resistent, Config Roll	1	Roll
7100104763	92062CONFIG	3M™ Thermal Transfer Label Material 92062, White, Aceton Resistent, Config Roll	1	Roll
7100104764	92064CONFIG	3M™ Thermal Transfer Label Material 92064, Silver, Aceton Resistent, Config Roll	1	Roll
7100104697	92200CONFIG	3M™ Thermal Transfer Label Material 92200, White, Configurable rolls	1	Roll
7100104692	xxx	3M™ Thermal Transfer Label Material H10CH, Silver, Config Roll	1	Roll

3M™ Thermal Transfer Label Material 7875E

Our 3M™ Thermal Transfer Label Materials are versatile and durable label stocks. They provide excellent thermal stability and moisture resistance for use in demanding applications, such as bar code tracking. The adhesive on many labels offers excellent clarity and good initial tack to help improve the finished label.



- Topcoated for thermal transfer printing
- The topcoat also provides improved ink anchorage for traditional forms of press printing

Product ID	Part Number	Product Name	MOQ	OU
7100104737	7875EH CONFIG	3M™ Thermal Transfer Label Material 7875EH, Silver, Width 1500 mm, Config roll	1	Roll
7100104682	xxx	3M™ Thermal Transfer Polyester Label Material 7875E, Platinum, Config roll	1	Roll

Labels

3M™ Thermal Transfer Polyester Label Material 7876EC

3M™ Thermal Transfer Polyester Label Material 7876EC is a clear polyester label material that offers premium durability and moisture resistance. This label product utilizes 3M™ High Performance Acrylic Adhesive 350E, it offers excellent chemical resistance and holding strength even at high temperatures.

- Facestock is topcoated for thermal transfer printing. The topcoat also provides improved ink anchorage for traditional forms of press printing
- Adhesive can permanently bond to high surface energy (HSE) and low surface energy (LSE) plastics, textured and contoured surfaces, powder coatings, and slightly oily metals
- Thick adhesive caliper provides for stronger bond on textured surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100104683	7876ECCONFIG	3M™ Thermal Transfer Polyester Label Material 7876EC, Clear Glossy, 1500 mm, Config roll	1	Roll
7100104738	7876EKCONFIG	3M™ Thermal Transfer Polyester Label Material 7876EK, Transparent, Width 1500 mm, Config roll	1	Roll

3M™ Versatile Print Label Material 7871V

3M™ Versatile Print Label Material 7871V is a gloss polyester label material that offers durability and moisture resistance. The topcoat is formulated to print with multiple technologies, including UV inkjet, water flexo, UV flexo, thermal transfer, and screen printing. This label product utilizes 3M™ High Performance Acrylic Adhesive 350, it offers excellent chemical resistance and holding strength even at high temperatures.

- Print water-based flexographic on gloss
- Near zero edge bleed and high image sharpness
- Run more jobs per batch on digital presses



Product ID	Part Number	Product Name	MOQ	OU
7100166745	xxx	3M™ Versatile Print Label Material 7871V, White Glossy, Polyester, 1372 mm, Config roll	1	Roll

3M™ Versatile Print Label Material 7872V

3M™ Versatile Print Label Material is a durable label material with a new topcoat formulation that works with more inks on more printing presses, including water-based flexographic inks on gloss labels.

- Print water-based flexographic on gloss
- Near zero edge bleed and high image sharpness
- Run more jobs per batch on digital presses



Product ID	Part Number	Product Name	MOQ	OU
7100166746	xxx	3M™ Versatile Print Label Material 7871V, Platinum Glossy, Polyester, 1372 mm, Config roll	1	Roll

Labels

3M™ Polyester Label Material 7871

3M™ Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.



- Adhesive can permanently bond to high surface energy (HSE) and low surface energy (LSE) plastics, textured and contoured surfaces, powder coatings, and slightly oily metals
- Thick adhesive caliper provides for stronger bond on textured surfaces
- Facestock is topcoated for thermal transfer printing

Product ID	Part Number	Product Name	MOQ	OU
7000116117	xxx	3M™ Polyester Label Material 7871, White Glossy, 150 mm x 508 m	1	Roll
7100008116	xxx	3M™ Polyester Label Material 7871, White Glossy, 1375 mm, Config roll	1	Roll
7100011333	xxx	3M™ Polyester Label Material 7871, White Glossy, 1500 mm x 500 m	1	Roll
7100104734	xxx	3M™ Polyester Label Material 7871E, Gloss White, PET50 350E / 46, Configurable Roll	1	Roll
7000116065	xxx	3M™ Polyester Label Material 7871EJ, White Glossy, 150 mm x 508 m	1	Roll
7100104678	7871EJCONFIG	3M™ Polyester Label Material 7871EJ, White Glossy, 1500 mm, Config roll	1	Roll

3M™ Thermal Transfer Polyester Label Material 7872

3M™ Thermal Transfer Polyester Label Material 7872 is a gloss polyester label material that offers premium durability and moisture resistance. This label product utilizes 3M™ High Performance Acrylic Adhesive 350, it offers excellent chemical resistance and holding strength even at high temperatures.



- Adhesive can permanently bond to high surface energy (HSE) and low surface energy (LSE) plastics, textured and contoured surfaces, powder coatings, and slightly oily metals
- Thick adhesive caliper provides for stronger bond on textured surfaces
- Facestock is topcoated for thermal transfer printing

Product ID	Part Number	Product Name	MOQ	OU
7100104634	xxx	3M™ Thermal Transfer Polyester Label Material 7872, Platinum Glossy, 1500 mm, Config roll	1	Roll
7100104679	xxx	3M™ Thermal Transfer Polyester Label Material 7872EC, Platinum Glossy, 1500 mm, Config roll	1	Roll
7100104680	7872EJCONFIG	3M™ Thermal Transfer Polyester Label Material 7872EJ, Platinum Glossy, 1500 mm, Config roll	1	Roll
7000116069	xxx	3M™ Thermal Transfer Polyester Label Material 7872EJ, Platinum, 150 mm x 508 m, 0.08 mm	1	Roll
7100104735	xxx	3M™ Thermal Transfer Polyester Label Material 7872ESF, 50-350E/47 36SP, Configurable Roll	1	Roll

Labels

3M™ Thermal Transfer Label Material 7815E

3M™ Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.



- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

Product ID	Part Number	Product Name	MOQ	OU
7100104630	7815CONFIG	3M™ Thermal Transfer Label Material 7815, White, Config Roll	1	Roll
7000116079	xxx	3M™ Thermal Transfer Polyester Label Material 7815EB, White Matte, 1500 mm x 500 m	1	Roll
7100104666	7815EBCONFIG	3M™ Thermal Transfer Polyester Label Material 7815EB, White Matte, 1500 mm, Config roll	1	Roll
7000116071	xxx	3M™ Thermal Transfer Polyester Label Material 7815EH, White Matte, 150 mm x 508 m	10	Roll
7000116074	xxx	3M™ Thermal Transfer Polyester Label Material 7815EH, White Matte, 1500 mm x 500 m	1	Roll
7100104667	7815EHCONFIG	3M™ Thermal Transfer Polyester Label Material 7815EH, White Matte, 1500 mm, Config roll	1	Roll

3M™ Thermal Transfer Label Material 7816E

3M™ Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.



- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

Product ID	Part Number	Product Name	MOQ	OU
7100185368	xxx	3M™ Thermal Transfer Label Material 7816EC, Config rolls	1	Roll
7000116080	xxx	3M™ Thermal Transfer Polyester Label Material 7816E, White Glossy, 150 mm x 508 m	1	Roll
7000116082	xxx	3M™ Thermal Transfer Polyester Label Material 7816E, White Glossy, 1500 mm x 500 m	1	Roll
7100104668	7816ECONFIG	3M™ Thermal Transfer Polyester Label Material 7816E, White Glossy, 1500 mm, Config roll	1	Roll
7100104669	7816EHCONFIG	3M™ Thermal Transfer Polyester Label Material 7816EH, White Glossy, 1500 mm, Config roll	1	Roll

Labels

3M™ Thermal Transfer Label Material 7818EH

3M™ Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.



- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

Product ID	Part Number	Product Name	MOQ	OU
7100000168	xxx	3M™ Thermal Transfer Polyester Label Material 7818E, Silver Matte, 1372 mm, Config roll	1	Roll
7000116101	xxx	3M™ Thermal Transfer Polyester Label Material 7818EH, Silver Matte, 150 mm x 508 m	1	Roll
7000116090	xxx	3M™ Thermal Transfer Polyester Label Material 7818EH, Silver Matte, 1500 mm x 500 m	1	Roll
7100104670	7818EHCONFIG	3M™ Thermal Transfer Polyester Label Material 7818EH, Silver Matte, 1500 mm, Config roll	1	Roll

3M™ Thermal Transfer Label Material 7813EH

3M™ Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.



- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

Product ID	Part Number	Product Name	MOQ	OU
7000116354	xxx	3M™ Thermal Transfer Polyester Label Material 7813EH, Silver Matte, 150 mm x 508 m	1	Roll
7100104665	7813EHCONFIG	3M™ Thermal Transfer Polyester Label Material 7813EH, Silver Matte, 1500 mm, Config roll	1	Roll

3M™ Thermal Transfer Label Material 7879EJ

3M™ Thermal Transfer Polyester Label Material 7879EJ is a durable silver polyester label material that is designed for use in demanding applications. This label material utilizes 3M™ High Performance Acrylic Adhesive 350E, it offers excellent chemical resistance and holding strength even at high temperatures.



- Topcoat provides the advantages of matte coating combined with a surface that is smooth enough for thermal transfer printing
- 3M™ High Performance Acrylic Adhesive 350E permanently bonds to high surface energy (HSE) and low surface energy (LSE) plastics, textured and contoured surfaces, powder coatings, and slightly oily metals
- Glassine paper liner

Product ID	Part Number	Product Name	MOQ	OU
7100024544	xxx	3M™ Thermal Transfer Label Material 7879EJ, Silver Matte, 750 mm x 500 m	2	Roll
7100024083	xxx	3M™ Thermal Transfer Label Material 7879EJ, Silver, 150 mm x 508 m, 0.08 mm	1	Roll
7100104684	7879EJCONFIG	3M™ Thermal Transfer Polyester Label Material 7879EJ, Silver Matte, 1500 mm, Config roll	1	Roll

Labels

3M™ Thermal Transfer Polyester Label Material 7874EC

3M™ Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.

- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer



Product ID	Part Number	Product Name	MOQ	OU
7100104681	xxx	3M™ Thermal Transfer Polyester Label Material 7874EC, White Matte, 1500 mm, Config roll	1	Roll
7100023942	xxx	3M™ Thermal Transfer Polyester Label Material 7874EC, White, 150 mm x 508 m, 0.08 mm	1	Roll

3M™ Thermal Transfer Label Material 3921

3M™ Thermal Transfer Acrylate Label Material 3921 consists of a non-topcoated acrylate facestock designed for thermal transfer printing and withstand high temperatures and resist chemicals such as those found in the fabrication of printed circuit boards (PCBs).

- Acrylate facestock for high temperature applications
- 55# densified kraft liner assures consistent die cutting
- Matte white facestock for good print contrast and easy readability of barcodes and variable information



Product ID	Part Number	Product Name	MOQ	OU
7000032795	xxx	3M™ Thermal Transfer Label Material 3921, White Matte, 152 mm x 300 m, 0.05 mm	1	Roll

3M™ Thermal Transfer Printable Retro-Reflective Label Material 3929

3M™ Label Material 3929 thermal transfer printable retro-reflective film with 3M™ Adhesive 200 on a clay-coated paper liner is designed for long range bar code scanning. When bar code printed, the retro-reflective facestock extends the maximum and minimum scanning distance of long range scanners.

NOTE: 3M is unable to specify a maximum scanning distance with this material because of the differences between long range scanners.

- Retro-reflective facestock
- Designed for use with long range scanners
- Fan folding is not recommended, roll-to-roll is the preferred continuous printing process



Product ID	Part Number	Product Name	MOQ	OU
7000116134	xxx	3M™ Thermal Transfer Printable Retro-Reflective Label Material 3929, Silver Glossy, 152 mm x 508 m, 0.026 mm	1	Roll
7000116136	xxx	3M™ Thermal Transfer Printable Retro-Reflective Label Material 3929, Silver Glossy, 610 mm x 508 m, 0.026 mm	2	Roll

Labels

3M™ Foil Label Material 7800

3M™ Foil Label Materials feature durable, thin gauge 1145 H19 aluminum, a cost-effective alternative to aluminum nameplates. Vinyl topcoating makes labels printable with conventional or UV inks. Our 3M™ Adhesive 320 delivers excellent adhesion to surfaces including most plastics in a variety of conditions. Polycoated or densified kraft liners make for efficient rotary and roll to roll processing.



- Great alternative to traditional aluminum nameplates
- Vinyl topcoated aluminum foil facestock is extremely durable and suitable for a range of printing processes
- 3M™ Adhesive 320 resists flagging and delivers excellent adhesion to plastics

Product ID	Part Number	Product Name	MOQ	OU
7000048467	xxx	3M™ Foil Label Material 7800, Silver Matte, 165 mm x 508 m, 0.05 mm	1	Roll
7000048578	xxx	3M™ Foil Label Material 7800, Silver Matte, 508 mm x 508 m, 0.05 mm	1	Roll

3M™ High Temperature Resistant Label 3922

High temperature resistant labelstock 3922 is recommended for thermal transfer imaged labelstock applications where a high durability and superb resistance against highest application temperature is required.

Product ID	Part Number	Product Name	MOQ	OU
7000068216	3922DSL3	3M™ Thermal Transfer Label Materials 3922DSL, White, 305 mm x 300 m, 0.05 mm	4	Roll

3M™ Thermal Transfer Label Material 7777

3M™ Polypropylene Label Material 7777 is a durable material that offers good thermal stability and moisture resistance.



- Polypropylene is a conformable facestock for curved surfaces
- Corona-treated facestock for improved ink receptivity
- Good film stiffness allows easy die cutting and dispensing for automatic applications

Product ID	Part Number	Product Name	MOQ	OU
7000043742	xxx	3M™ Thermal Transfer Label Material 7777, White Glossy, 686 mm x 508 m, 0.07 mm	2	Roll
7100072934	7777CONFIG	3M™ Thermal Transfer Label Material 7777, White Glossy, 1372 mm, 0.07 mm, Config roll	1	Roll

Labels

3M™ Thermal Transfer Label Material 7810

3M™ Thermal Transfer Polyester Label Material 7810 is a durable matte polyester material that offers high abrasion and chemical resistance. This material utilizes 3M™ Acrylic Adhesive 300, which has excellent quick tack and also bonds well to a variety of surfaces including LSE plastics.

- Matte TT topcoat on white PET facestock
- Matte topcoat provides the advantages of matte coating combined with a surface that is smooth enough for thermal transfer printing
- Adhesive bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics

Product ID	Part Number	Product Name	MOQ	OU
7000116350	xxx	3M™ Thermal Transfer Label Material 7810EH, White, 150 mm x 508 m	10	Roll
7100104664	7810EHCONFIG	3M™ Thermal Transfer Polyester Label Material 7810EH, White Matte, 1500 mm, Config roll	1	Roll

3M™ Dot Matrix Label Materials

3M™ Dot Matrix Label Materials are designed specifically for computer imprinting applications, including dot matrix/impact. Topcoated facestocks from polyester to semi-rigid vinyl are excellent for variable information and hand writeability. A range of 3M adhesives suits labelling applications from low-temp environments and acid-resistant battery labels to decorative films and overlaminations.



- Designed specifically for computer printing applications including dot matrix/impact
- Facestocks include polyester, polypropylene and semi-rigid vinyl for durability and conformability
- Excellent for variable information and printability

Product ID	Part Number	Product Name	MOQ	OU
7100174285	xxx	3M™ Scotchcal™ Thermal Transfer Printable Label material 3692-1802ADL+, Yellow Glossy, 1220 mm x 50 m	1	Roll
7100174287	xxx	3M™ Scotchcal™ Thermal Transfer Printable Label material 3692-1802BDL+, Yellow Glossy, 914 mm x 50 m	1	Roll
7100193898	xxx	3M™ Scotchcal™ Thermal Transfer Printable Label material 3692-1802E+, Yellow Glossy, 1220 mm, Config roll	1	Roll
7100174284	xxx	3M™ Scotchcal™ Thermal Transfer Printable Label material 3692-1802EDL+, Yellow Glossy, 1220 mm x 250 m	1	Roll

3M™ Dot Matrix Label Material 7880

3M™ Dot Matrix Label Materials are designed specifically for computer imprinting applications, including dot matrix/impact. Topcoated facestocks from polyester to semi-rigid vinyl are excellent for variable information and hand writeability. A range of 3M adhesives suits labelling applications from low-temp environments and acid-resistant battery labels to decorative films and overlaminations.



- Designed specifically for computer printing applications including dot matrix/impact
- Facestocks include polyester, polypropylene and semi-rigid vinyl for durability and conformability
- Excellent for variable information and printability

Product ID	Part Number	Product Name	MOQ	OU
7100048944	7880CONFIG	3M™ Dot Matrix Label Material 7880, White Matte, Polyester, 1372 mm, Config roll	1	Roll

Labels

3M™ Scotchcal™ Polyvinylchloride Foil 3690E+

3M™ Scotchcal™ Label 3690+ utilizes a durable PVC facestock and a special modified acrylic adhesive. The adhesive is designed to adhere well to difficult surfaces such as rough and porous substrates, and low surface energy materials such as polyethylene and polypropylene. It is suitable for outdoor applications, which require a high degree of durability. Their thin caliper and flexibility allow for conformance to small diameter and complex curved surfaces.



- White PVC facestock offers durability and conformability
- Designed to withstand ultraviolet light, temperature extremes and solvents
- High density bar codes can be printed on either stock with a thermal transfer printer and resin ribbon

Product ID	Part Number	Product Name	MOQ	OU
7100219952	xxx	3M™ ScotchCal™ Label Materials 3690E+, White, 213MMX225M		Each
7100174271	xxx	3M™ ScotchCal™ Performance Label Material 3690E+, White Glossy, 152 mm x 250 m	1	Roll
7100174272	xxx	3M™ ScotchCal™ Performance Label Material 3690E+, White Glossy, 305 mm x 500 m	1	Roll
7100174270	xxx	3M™ ScotchCal™ Performance Label Material 3690E+, White Glossy, 610 mm x 500 m	2	Roll
7100181129	3690ECONFIG	3M™ ScotchCal™ Performance Label Material 3690E+, White Glossy, 1220 mm, Config roll	1	Roll
7100174095	xxx	3M™ ScotchCal™ Performance Label Material 3690ED+, White Matte, 1220 mm x 250 m	1	Roll
7100174306	xxx	3M™ Scotchcal™ Thermal Transfer Printable Label Material 3690E+, White Glossy, 1220 mm x 250 m	2	Roll
7100104736	7874EKCONFIG	3M™ Thermal Transfer Label Material 3690E, Config roll	1	Roll
7100174276	xxx	3M™ Thermal Transfer Label Materials 3690E DSL+, White, 150 mm x 500 m	1	Roll
7100174275	xxx	3M™ Thermal Transfer Label Materials 3690E DSL+, White, 305 mm x 500 m	4	Roll

3M™ Laser Markable Label Stock

3M™ Laser Markable Label Stock has a top layer which is etched off during the process to reveal an ultra-durable image. The same laser can also “kiss cut” the label to size, maximizing flexibility for producing variable labels for durable applications.



- Ultra-durable performance
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

Product ID	Part Number	Product Name	MOQ	OU
7000068786	7846120	3M™ Laser Markable Label Stock 7846, Black/White, 120 mm x 300 m, 0.06 mm	1	Roll
7000068792	xxx	3M™ Laser Markable Label Stock 7848, Black, 90 mm x 300 m, 0.06 mm	1	Roll
7000032796	xxx	3M™ Laser Markable Label Stock 7848, Silver/Black, 120 mm x 300 m, 0.06 mm	10	Roll
7000068790	xxx	3M™ Laser Markable Label Stock 7848, Silver/Black, 1220 mm x 300 m, 0.06 mm	1	Roll

Labels

3M™ Laser Markable Label Material 7847

3M™ Laser Markable Label Material 7847 is a specialty film label material where a laser can ablate the top layer of a dual-layer facestock to create an image.

- Cast modified acrylate facestock offers long-term durability and excellent abrasion, temperature, chemical and environmental resistance
- High-resolution and high-contrast images markable with standard Nd-Yag lasers for smaller barcodes, 2-D symbologies and fine point text
- Excellent convertability ("kiss cutting") of acrylate facestock on densified kraft liner



Product ID	Part Number	Product Name	MOQ	OU
7000068795	xxx	3M™ Laser Markable Label Material 7847, Black/White Matte, 90 mm x 300 m, 0.06 mm	1	Roll
7000032797	7847120	3M™ Laser Markable Label Material 7847, Black/White Matte, 120 mm x 300 m, 0.06 mm	1	Roll
7000068797	xxx	3M™ Laser Markable Label Material 7847, Black/White Matte, 1220 mm x 300 m, 0.06 mm	1	Roll

3M™ Dot Matrix Label Material 7983

3M™ Screen Printable Sheet Polyester Label Material 7983 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance. This material utilizes 3M™ Adhesive 300, which has excellent quick tack and also bonds well to a variety of surfaces including LSE plastics.

- Matte coating is compatible with screen printing and resists degradation from scuffing, chemicals, moisture, and wide temperature fluctuations
- 3M adhesive 300 bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics
- Liner provides easy sheet processing and is designed for layflat. The backside of the liner is not printable



Product ID	Part Number	Product Name	MOQ	OU
7000029138	7983/508	3M™ Dot Matrix Label Material 7983, Silver Matte, 508 mm x 686 mm	100	Sheet
7100307932	7983/508	3M™ Dot Matrix Label Material 7983, Silver Matte, 508 mm x 686 mm	100	Sheet

3M™ Sheet Label Material 7905

3M™ Sheet Label Material 7905 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Facestock is topcoated for improved ink anchorage
- Variable information can be added by the end-user as the material is thermal transfer printable
- Liner provides easy sheet processing and is designed for layflat



Product ID	Part Number	Product Name	MOQ	OU
7100307923	xxx	3M™ Sheet and Screen Label Material 7905, Clear Glossy, Polyester, 508 mm x 686 m	100	Sheet
7000001251	xxx	3M™ Sheet and Screen Label Material 7905, Clear Glossy, Polyester, 686 mm x 229 m	2	Roll

Labels

3M™ Sheet and Screen Label Material 7908E

3M™ Sheet and Screen Label Materials 7908E is our 50 micron gloss white polyester facestock with 45 micron acrylic adhesive 350 on a 170 micron polycoated kraft liner with green 3M Logo printed. It's UL recognised and CSA accepted.



- Facestocks (polyester and vinyl) and adhesives offer heat tolerance, clarity, and UV resistance
- 350 high performance acrylic adhesive for high shear strength on low surface energy (LSE) substrates
- Polycoated and film liners are suitable for efficient processing

Product ID	Part Number	Product Name	MOQ	OU
7100169890	xxx	3M™ Sheet and Screen Label Material 7908E, White Glossy, 508 mm x 686 mm	100	Sheet
7100104761	7908CONFIG	3M™ Sheet and Screen Label Material 7908E, White Glossy, 1500 mm, Config roll	1	Roll

3M™ Sheet Label Material 7908FL

3M™ Sheet Label Material 7908FL is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Facestock is topcoated for improved ink anchorage
- Variable information can be added by the end-user as the material is thermal transfer printable
- Liner provides easy sheet processing and is designed for layflat applications that require domed decal moulding

Product ID	Part Number	Product Name	MOQ	OU
7100134196	xxx	3M™ Screenprintable Adhesive 7908FL, White, 686 mm x 508 m, Roll	2	Roll
7100013744	xxx	3M™ Sheet Label Materials 7908FL, Silver Glossy, 1372 mm, Configurable rolls	1	Roll

3M™ Screen Printable Polyester Performance Durable Label Material with Structured Adhesive 7220SA

3M™ Screen Printable Polyester Performance Durable Label Material with Structured Adhesive 7220SA is a durable, high performance material that offers excellent thermal stability and moisture resistance.



- Most universal adhesive for label materials
- Adhesive offers excellent chemical resistance and holding strength, even at high temperatures
- Liner provides easy sheet processing and is designed for the ultimate in layflat

Product ID	Part Number	Product Name	MOQ	OU
7000047374	xxx	3M™ Sheet and Screen Label Material 7220SA, White Glossy, 1372 mm x 229 m, 0.05 mm	1	Roll

Labels

3M™ Clear Polyester Durable Label Material FM01860N

3M™ Clear Polyester Durable Label Material FM01860N is a durable, high performance material that offers excellent thermal stability and moisture resistance.

- Good initial tack
- Long term adhesion with clean removability
- Repositionable



Product ID	Part Number	Product Name	MOQ	OU
7100160295	xxx	3M™ Clear Polyester Durable Label Material FM01860N, Clear Glossy, 686 mm x 508 m	2	Roll

3M™ Removable Vinyl Label Material 7600

3M™ Removable Vinyl Label Material 7600 is a conformable white vinyl stock that utilizes 3M™ Acrylic Adhesive 500 which offers clean removability on most surfaces for up to one year, as well as, excellent plasticizer resistance.

- Conformable to contoured surfaces
- Resists wrinkling and delamination
- One-piece removal up to one year after application



Product ID	Part Number	Product Name	MOQ	OU
7000047365	xxx	3M™ Removable Vinyl Label Material 7600, White Satin, 686 mm x 508 m, 0.09 mm	1	Roll

3M™ Overlamine Label Materials

3M™ Overlamine Label Materials are designed for protective overlamine applications. A durable facestock resists scuffs, abrasions and chemicals. Different adhesives are available for performance in a variety of temperatures, substrates, and environments – including oily metals.

- Labels for protective overlamine applications
- Offers UV resistance and helps prevent colour fading
- Facestocks resist abrasion, scuffs and weathering



Product ID	Part Number	Product Name	MOQ	OU
7000117086	xxx	3M™ Overlamine Label Material 7746, Clear Glossy, 1500 mm x 500 m	1	Roll
7100104650	7746CONFIG	3M™ Overlamine Label Material 7746, Clear Glossy, 1500 mm, Config roll	1	Roll
7100065909	xxx	3M™ Overlamine Label Material 8417, Clear, 195 mm x 198 m	1	Roll
7100104685	C22CICONFIG	3M™ Overlamine Label Material C22CI, Clear Matte, 1220 mm, Config roll	1	Roll

Labels

3M™ Overlamine Label Material 8417

3M™ PET Durable Label Material 8417 is a self-wound (linerless) transparent polyester film coated with 3M™ Adhesive 100 High-temperature Acrylic. It is often used as an overlaminate in conjunction with 3M™ PET Durable Label Material 8418.



- Labels for protective overlaminate applications
- Offers UV resistance and helps prevent colour fading
- Facestock resists abrasion, scuffs and weathering

Product ID	Part Number	Product Name	MOQ	OU
7000048426	xxx	3M™ Overlamine Label Material 8417, Clear, 50 mm x 198 m	24	Roll
7100027905	xxx	3M™ Overlamine Label Material 8417, Glossy Clear Polyester, 1220 mm x 197 m	1	Roll

3M™ Overlamine Label Material 7742

3M™ Overlamine Label Material 7742 utilizes a mat polyester film that is recommended for optimum durability and outdoor UV exposure. 3M™ Adhesive 400 offers excellent low temperature performance and long term aging for resistance to yellowing in outdoor applications.



- Labels for protective overlaminate applications
- Offers UV resistance and helps prevent colour fading
- Facestock resists abrasion, scuffs and weathering

Product ID	Part Number	Product Name	MOQ	OU
7000048907	xxx	3M™ Overlamine Label Material 7742, Matte Clear Polyester, 686 mm x 508 m	2	Roll
7100013610	xxx	3M™ Overlamine Label Material 7742, Matte Clear Polyester, 1372 mm, Config roll	1	Roll

3M™ Screen Printable Polyester Performance Durable Label Material with Structured Adhesive 7214SA

3M™ Screen Printable Polyester Performance Durable Label Material with Structured Adhesive 7214SA is a durable, high performance material that offers excellent thermal stability and moisture resistance.



- Most universal adhesive for label materials
- Adhesive offers excellent chemical resistance and holding strength, even at high temperatures
- Liner provides easy sheet processing and is designed for the ultimate in layflat

Product ID	Part Number	Product Name	MOQ	OU
7000145662	xxx	3M™ Structural Adhesive Label Material 7214SA, Silver, 686 mm x 137 m	2	Roll

3M™ Tamper Evident Label Materials

3M™ Tamper Evident Label Materials are available in a full range of materials, patterns and colours for specific tamper-resistant labelling challenges. Destructible and non-destructible facestocks including paper, vinyl, acetate and polyester, and adhesives are formulated for a variety of surfaces including polyolefins. Reinforced paper liners add dimensional stability during processing.

- Designed for a range of labelling applications where tamper-resistance is important
- Destructible and non-destructible facestocks include paper, vinyl, acetate and polyester for reliable use and processing
- Range of acrylic adhesives is formulated for strength, tack and clarity on a variety of surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100104640	7382CONFIG	3M™ Polyester Tamper Indicating Material 7382, Silver, CONFIG, Rol	1	Roll
7100104730	76968ECONFIG	3M™ Polyester Tamper Indicating Material 76968E, White, CONFIG, Rol	1	Roll
7100104660	76970CONFIG	3M™ Polyester Tamper Indicating Material 76970, White, CONFIG, Rol	1	Roll
7100104661	76971CONFIG	3M™ Polyester Tamper Indicating Material 76971, Silver, CONFIG, Rol	1	Roll
7000068779	xxx	3M™ Tamper Evident Label Material 3812DSL, White, 152 mm x 508 m, 0.04 mm	1	Roll
7000068223	xxx	3M™ Tamper Evident Label Material 3812DSL, White, 610 mm x 508 m, 0.04 mm	2	Roll
7100110454	3812DSLCONFIG	3M™ Tamper Evident Label Material 3812DSL, White, Config Roll	1	Roll
7100097899	xxx	3M™ Tamper Evident Label Material 3813DSL, White, 508 mm x 686 mm, 0.04 mm	100	Sheet
7100104659	76799CONFIG	3M™ Tamper Evident Label Material 76799, Silver, Config Roll	1	Roll

3M™ Tamper Evident Label Materials 3812

3M™ Tamper Evident Label Materials are available in a full range of materials, patterns and colours for specific tamper-resistant labelling challenges. Destructible and non-destructible facestocks including paper, vinyl, acetate and polyester, and adhesives are formulated for a variety of surfaces including polyolefins. Reinforced paper liners add dimensional stability during processing.

- Designed for a range of labelling applications where tamper-resistance is important
- Destructible and non-destructible facestocks include paper, vinyl, acetate and polyester for reliable use and processing
- Range of acrylic adhesives is formulated for strength, tack and clarity on a variety of surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100230199	xxx	3M™ Tamper Evident Label Material 3812, Roll, Config	1	Roll
7000068776	xxx	3M™ Tamper Evident Label Material 3812, White, 152 mm x 508 m, 0.04 mm	1	Roll
7000068775	xxx	3M™ Tamper Evident Label Material 3812, White, 305 mm x 508 m, 0.04 mm	1	Roll

3M™ Press Printable Label Materials

3M™ Thermal Transfer Polyester Label Material 92200 is our 50 micron, gloss white printable polyester label stock. It has a 65 micron acrylic adhesive SE100 on a 62 gsm white densified double sided glassine liner and is UL and cUL recognised.



- Designed for a full range of on-press printed label applications including flexographic and screen
- Facestocks include polyester, vinyl and acetate for durability and conformability
- Range of 3M acrylic adhesives suits the most specific applications

Product ID	Part Number	Product Name	MOQ	OU
7100136882	xxx	3M™ Film Material 76661 LT1, White matcte, 1500 mm x 1000 m, 0.081 mm	2	Roll
7100110455	3922DSLCONFIG	3M™ High-Temperature-Resistant Film 3922DSL, White, Config Roll	1	Roll
7100113086	xxx	3M™ Polyester Label Film 76647, 1500 mm x 500 m	4	Roll
7100104701	76510CONFIG	3M™ Polyester Label Material 76510, Clear glossy, Config Roll	1	Roll
7100104725	76550CCONFIG	3M™ Polyester Label Material 76550C, Clear Matte, Config Roll	1	Roll
7100104726	76605CCONFIG	3M™ Polyester Label Material 76550C, White, Config Roll	1	Roll
7100104657	xxx	3M™ Polyester Label Material 76610, Clear, Config Roll	1	Roll
7100104702	xxx	3M™ Polyester Label Material 76616, White Matte, Config Roll	1	Roll
7100104709	xxx	3M™ Polyester Label Material 76708, Silver Matte, Config Roll	1	Roll
7100104720	76712CONFIG	3M™ Polyester Label Material 76712, Silver Matte, Config Roll	1	Roll
7100104759	xxx	3M™ Polyester Label Material 76738, Matt Silver, Config Roll	1	Roll
7100104727	xxx	3M™ Polyester Label Material 76741C, Silver glossy, Config Roll	1	Roll
7100104721	xxx	3M™ Polyester Label Material 76750, Silver Matte, Config Roll	1	Roll
7100104706	xxx	3M™ Polyester Label Material 76757, Silver Matte, Config Roll	1	Roll
7100104729	xxx	3M™ Polyester Label Material 76759C, Silver Matte, Config Roll	1	Roll
7100104723	76953CONFIG	3M™ Polyester Label Material 76953, Yellow glossy, Config Roll	1	Roll
7100104724	xxx	3M™ Polyester Label Material 76954, White glossy, Config Roll	1	Roll
7100110456	xxx	3M™ Polyester Label Material 92205, Config Roll	1	Roll
7100104698	92350CONFIG	3M™ Polyester Label Material 92350, Silver matte, Config Roll	1	Roll
7100104696	D84YHCONFIG	3M™ Polyester Label Material D84YB, Glossy Silver, Config Roll	1	Roll
7100104686	xxx	3M™ Polyester Label Material D84YB, Platinum Silver, Config Roll	1	Roll
7100104741	xxx	3M™ Polyester Label Material D85UB, White glossy, Config Roll	1	Roll
7100104687	D85YBCONFIG	3M™ Polyester Label Material D85YB, White, Jumbo, 1500 mm, Variable Roll Dimensions	1	Roll
7100147821	xxx	3M™ Polyester Label Material D85YH, 1500 mm x 250 m	1	Roll
7100104742	xxx	3M™ Polyester Label Material D85YH, White glossy, Config Roll	1	Roll
7100104743	G02C3CONFIG	3M™ Polyester Label Material G02C3, Clear Matte, Config Roll	1	Roll
7100104744	xxx	3M™ Polyester Label Material G15XJ , White Matte, Config Roll	1	Roll
7100104745	xxx	3M™ Polyester Label Material G35C3 , Clear glossy, Config Roll	1	Roll
7100104688	xxx	3M™ Polyester Label Material G35CC, Matt White, Config Roll	1	Roll
7100104689	xxx	3M™ Polyester Label Material G36VH, Matte Silver, Config Roll	1	Roll
7100104747	xxx	3M™ Polyester Label Material G62UB, Silver Matte, Config Roll	1	Roll
7100104753	xxx	3M™ Polyester Label Material G80C6, Silver Glossy, Config Roll	1	Roll
7100104748	xxx	3M™ Polyester Label Material H10C3, Silver Matte, Config Roll	1	Roll
7100104750	xxx	3M™ Polyester Label Material H11C3, White Matte, Config Roll	1	Roll
7100104693	xxx	3M™ Polyester Label Material H12CB, Clear, Config Roll	1	Roll
7100104654	I00Y3CONFIG	3M™ Polyester Label Material I00Y3, Silver, Jumbo, 1500 mm, Variable Roll Dimensions	1	Roll

3M™ Press Printable Label Materials

3M™ Thermal Transfer Polyester Label Material 92200 is our 50 micron, gloss white printable polyester label stock. It has a 65 micron acrylic adhesive SE100 on a 62 gsm white densified double sided glassine liner and is UL and cUL recognised.



- Designed for a full range of on-press printed label applications including flexographic and screen
- Facestocks include polyester, vinyl and acetate for durability and conformability
- Range of 3M acrylic adhesives suits the most specific applications

Product ID	Part Number	Product Name	MOQ	OU
7100104752	I01Y3CONFIG	3M™ Polyester Label Material I01Y3, White Matte, Config Roll	1	Roll
7100104756	xxx	3M™ Polyolefin Label Material 92979, White Matte, Config Roll	1	Roll
7000116365	xxx	3M™ Press Printable Label Material 7860E, White, 150 mm x 508 m, 0.05 mm	1	Roll
7100104671	xxx	3M™ Press Printable Label Material 7860E, White, Jumbo 1500 mm, Config Rolls	1	Roll
7100104672	7860EHCONFIG	3M™ Press Printable Label Material 7860EH, White, Config Roll	1	Roll
7100104673	xxx	3M™ Press Printable Label Material 7861E, Clear, Config Roll	1	Roll
7100104732	xxx	3M™ Press Printable Label Material 7861EH, White, 300E, Config Rolls PL	1	Roll
7100072947	7863CONFIG	3M™ Press Printable Label Material 7863, Silver, Jumbo 1372 mm, Configurable rolls	1	Roll
7100073737	xxx	3M™ Press Printable Label Material 76717NA, White, Confil Roll	1	Roll
7100104699	xxx	3M™ Press Printable Label Material 76759, Silver Matte, Config Roll	1	Roll
7100182558	xxx	3M™ Press Printable Label Material 76962, White, Config Roll	1	Roll
7100104757	xxx	3M™ Press Printable Label Material 76992, Blue, 350/20	1	Roll
7100075712	xxx	3M™ Press Printable Label Material 92200, White, 1500 mm x 250 m, 0.05 mm	1	Roll
7100104655	xxx	3M™ Thermal Transfer Printable Label Material H01C3, Config Roll	1	Roll

3M™ Press Printable Label Material 7868

3M™ Press Printable Label Material 7868 is excellent for efficiency across a wide range of printed labelling applications. Topcoated facestock provides a wide choice of durability and conformability, and suit specific inks and methods. 3M adhesives are designed for applications requiring high tack, temperature performance, challenging substrates and more.

- Designed for a full range of on-press printed label applications including flexographic and screen
- Facestocks include polyester, vinyl and acetate for durability and conformability
- Range of 3M acrylic adhesives suits the most specific applications

Product ID	Part Number	Product Name	MOQ	OU
7100104674	xxx	3M™ Press Printable Label Material 7868E, White, Confil Roll	1	Roll
7000116388	xxx	3M™ Press Printable Label Material 7868EC, White, 1500 mm x 500 m, 0.08 mm	1	Roll
7100104675	7868ECONFIG	3M™ Press Printable Label Material 7868EC, White, Confil Roll	1	Roll

Labels

3M™ Press Printable Label Material 8418

3M™ Polyester Film Tape 8418 is a white polyester film coated with 3M Adhesive 100 High-temperature Acrylic and has a liner.

- Adheres instantly to a variety of surfaces
- Tough film backing resists edge tear when processing and dispensing
- Non-corrosive and chemical resistant

Product ID	Part Number	Product Name	MOQ	OU
7000097248	xxx	3M™ Press Printable Label Material 8418, White, 75 mm x 198 m	16	Roll
7100066060	xxx	3M™ Press Printable Label Material 8418, White, 203 mm x 198 m	1	Roll

3M™ Computer-Imprintable Polyester Label Material 7883

3M™ Computer-Imprintable Polyester Label Material 7883 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance

- Topcoated polyester is compatible with dot matrix printing and is hand writeable
- #300 adhesive bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics
- 55# densified kraft liner assures consistent die cutting



Product ID	Part Number	Product Name	MOQ	OU
7100009898	7883CONFIG	3M™ Dot Matrix Label Material 7883, Silver Matte, Polyester, 1372 mm, Config roll	1	Roll

3M™ Sheet and Screen Label Material 7940

3M™ Aluminium Foil Label Material 7940 is a durable, thin gauge aluminium designed to meet a wide range of difficult nameplate application requirements. 3M™ Aluminium Foil Label Material 7940 utilizes 3M™ Adhesive 320 which offers excellent adhesion to a variety of surfaces including high surface energy (HSE) and low surface energy (LSE) plastics.

- The liner for 3M label material 7940 provides easy sheet processing and is designed for layflat
- The backside of the liner is not printable
- UL Recognized file MH11410



Product ID	Part Number	Product Name	MOQ	OU
7100308327	xxx	3M™ Sheet and Screen Label Material 7940, Silver Matte, 508 mm x 686 mm	100	Sheet

Labels

3M™ Sheet and Screen Label Material 7909S

3M™ Sheet Label Material 7909 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Liner provides easy sheet processing and is designed for layflat
- The backside of the liner is not printable
- UL Recognized files MH11410, CSA Group Certified file 99316



Product ID	Part Number	Product Name	MOQ	OU
7100307988	xxx	3M™ Screenprintable Adhesive 7909L, Silver, 508 mm 686 mm, 0.05 mm	100	Sheet
7100307925	xxx	3M™ Sheet and Screen Label Material 7909S, Silver Brushed, 508 mm x 686 mm	100	Sheet

3M™ Screen Printable Sheet Polyester Label Material 7924

3M™ Screen Printable Sheet Polyester Label Material 7924 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Facestock is topcoated for improved ink anchorage
- Variable information can be added by the end-user as the material is thermal transfer printable
- 3M adhesive 300 bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics

Product ID	Part Number	Product Name	MOQ	OU
7100307921	xxx	3M™ Screenprintable Adhesive 7924, Silver, 508 mm x 686 mm, 0.05 mm	100	Sheet

3M™ Tamper Evident Label Material 7937

3M™ Tamper Evident Label Materials are available in a full range of materials, patterns and colours for specific tamper-resistant labelling challenges. Destructible and non-destructible facestocks including paper, vinyl, acetate and polyester, and adhesives are formulated for a variety of surfaces including polyolefins. Reinforced paper liners add dimensional stability during processing.

- Designed for a range of labelling applications where tamper-resistance is important
- Destructible and non-destructible facestocks include paper, vinyl, acetate and polyester for reliable use and processing
- Range of acrylic adhesives is formulated for strength, tack and clarity on a variety of surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100308326	xxx	3M™ Tamper Evident Label Material 7937, White VOID Polyester Matte, 508 mm x 686 mm	100	Sheet

Labels

3M™ Tamper Evident Label Material 7935

3M™ Tamper Evident Label Materials are available in a full range of materials, patterns and colours for specific tamper-resistant labelling challenges.

- Designed for a range of labelling applications where tamper-resistance is important
- Destructible and non-destructible facestocks include paper, vinyl, acetate and polyester for reliable use and processing
- Range of acrylic adhesives is formulated for strength, tack and clarity on a variety of surfaces



Product ID	Part Number	Product Name	MOQ	OU
7100308324	xxx	3M™ Polyester Tamper Indicating Material 7935, White, Void Polyester Gloss TC, 508 mm x 686 mm	100	Sheet

3M™ Sheet Label Material 7903

3M™ Sheet Label Material 7903 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Facestock for 3M™ Sheet Label Material 7903, is print treated for ink anchorage
- Liner provides easy sheet processing and is designed for layflat. The backside of the liner is not printable
- 3M™ Sheet Label Material 7903 is UL recognized (File MH11410) and CSA accepted (File 99316). See the UL and CSA listings for details



Product ID	Part Number	Product Name	MOQ	OU
7100307989	xxx	3M™ Sheet and Screen Label Material 7903, Silver Glossy, Polyester, 508 mm x 686 mm	100	Sheet

3M™ Screen Printable Sheet Polyester Label Material 7931

3M™ Screen Printable Sheet Polyester Label Material 7931 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Facestock is topcoated for improved ink anchorage
- Variable information can be added by the end-user as the material is thermal transfer printable
- 3M adhesive 300 bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics



Product ID	Part Number	Product Name	MOQ	OU
7100307924	xxx	3M™ Sheet and Screen Label Material 7931, White Glossy, Polyester, 508 mm x 686 mm	100	Sheet

3M™ Screen Printable Sheet Polyester Label Material 7950

3M™ Screen Printable Sheet Polyester Label Material 7950 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Facestock is topcoated for improved ink anchorage
- Variable information can be added by the end-user as the material is thermal transfer printable
- 3M adhesive 300 bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics

Product ID	Part Number	Product Name	MOQ	OU
7100307922	xxx	3M™ Screenprintable Adhesive 7950, Clear, 508 mm 686 mm, 0.05 mm	100	Sheet

Labels

3M™ Screen Printable Sheet Polyester Label Material 7980

3M™ Screen Printable Sheet Polyester Label Material 7980 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance. This material utilizes 3M™ Adhesive 300, which has excellent quick tack and also bonds well to a variety of surfaces including LSE plastics.

- Matte coating is compatible with screen printing and resists degradation from scuffing, chemicals, moisture, and wide temperature fluctuations
- 3M adhesive 300 bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics
- Liner provides easy sheet processing and is designed for layflat. The backside of the liner is not printable



Product ID	Part Number	Product Name	MOQ	OU
7100311466	xxx	3M™ Dot Matrix Label Material 7980, White Matte, 508 mm x 686 mm	100	Sheet

Product Index

Product ID	Page
7000000792	53
7000000793	53
7000000811	28
7000000812	14
7000000877	43
7000000878	44
7000000879	44
7000000880	46
7000000884	45
7000000887	44
7000000888	45
7000000891	46
7000000898	34
7000000902	33
7000000903	33
7000000905	34
7000000906	34
7000000907	59
7000000917	41
7000000923	40
7000001161	182
7000001173	165
7000001178	160
7000001189	125
7000001210	169
7000001226	120
7000001229	172
7000001251	259
7000001272	183
7000001301	178
7000001314	162
7000001315	162
7000001317	119
7000001323	57
7000001329	189
7000001330	189
7000001482	128
7000001485	129
7000001488	187
7000001579	59
7000001581	167
7000001582	167
7000001584	59
7000001899	236
7000001960	145
7000001961	139
7000001962	140
7000001972	139
7000001973	140
7000001979	142
7000001981	143
7000002103	145
7000002105	146
7000002127	139
7000002128	139
7000002130	139
7000002131	139
7000002132	139

Product ID	Page
7000002133	139
7000004797	240
7000006768	56
7000006770	59
7000006772	130
7000006778	72
7000006835	136
7000008397	171
7000017005	157
7000021302	194
7000028586	29
7000028587	29
7000028589	33
7000028590	33
7000028616	55
7000028622	33
7000028669	165
7000028850	156
7000028851	155
7000028852	156
7000028853	156
7000028854	155
7000028855	155
7000028857	165
7000028858	164
7000028860	182
7000028865	107
7000028866	182
7000028867	177
7000028874	107
7000028889	160
7000028933	191
7000028946	176
7000028947	176
7000029006	162
7000029041	120
7000029043	69
7000029048	206
7000029049	206
7000029050	206
7000029057	218
7000029082	194
7000029136	169
7000029138	259
7000029144	169
7000029146	169
7000029149	177
7000029150	167
7000029151	166
7000029152	166
7000029153	168
7000029154	168
7000029691	139
7000029692	139
7000031099	241
7000031200	242
7000031204	242
7000031234	55

Product ID	Page
7000032383	192
7000032419	51
7000032420	53
7000032427	48
7000032428	48
7000032429	48
7000032430	48
7000032442	52
7000032443	52
7000032444	52
7000032445	52
7000032446	52
7000032795	255
7000032796	258
7000032797	259
7000033026	50
7000033072	130
7000033073	129
7000033105	84
7000033106	84
7000033109	92
7000033110	93
7000033111	78
7000033112	78
7000033113	78
7000033115	79
7000033116	79
7000033117	79
7000033118	79
7000033119	86
7000033123	79
7000033126	80
7000033127	80
7000033128	79
7000033130	70
7000033131	70
7000033132	71
7000033140	87
7000033141	72
7000033143	72
7000033144	72
7000033364	52
7000033372	53
7000033379	50
7000033721	54
7000033722	54
7000033731	39
7000033732	39
7000033748	39
7000035363	173
7000035364	173
7000035365	173
7000035366	229
7000035367	229
7000035368	229
7000035373	232
7000035376	232
7000035377	232

Product ID	Page
7000035390	174
7000035391	174
7000035392	174
7000035395	228
7000035397	175
7000035410	172
7000035433	89
7000035434	90
7000035435	90
7000035441	91
7000035443	91
7000035444	92
7000035445	134
7000035829	177
7000035835	169
7000036203	163
7000037354	78
7000037570	173
7000037777	117
7000038379	117
7000041363	136
7000041758	91
7000041764	133
7000041765	117
7000041773	92
7000041775	92
7000042346	127
7000042350	217
7000042352	210
7000042353	217
7000042354	221
7000042356	210
7000042357	214
7000042358	214
7000042359	218
7000042360	218
7000042361	212
7000042362	212
7000042363	210
7000042364	210
7000042365	209
7000042366	209
7000042367	211
7000042368	211
7000042369	214
7000042370	215
7000042371	216
7000042372	214
7000042373	218
7000042374	221
7000042375	216
7000042376	218
7000042377	210
7000042382	211
7000042383	211
7000042385	214
7000042386	214
7000042388	213

Product Index

Product ID	Page
7000042389	89
7000042390	88
7000042399	248
7000042415	201
7000042417	202
7000042428	106
7000042429	131
7000042430	131
7000042431	105
7000042432	128
7000042433	125
7000042435	118
7000042745	216
7000042747	219
7000042748	219
7000042749	216
7000042750	216
7000042752	217
7000042753	217
7000042755	220
7000042756	211
7000042757	131
7000042758	131
7000043112	250
7000043115	249
7000043127	79
7000043128	80
7000043129	70
7000043674	55
7000043742	256
7000043744	202
7000046343	53
7000046346	38
7000046372	20
7000046439	18
7000046463	18
7000046474	28
7000046513	44
7000046534	34
7000046563	42
7000046574	40
7000046594	35
7000047348	194
7000047365	261
7000047374	260
7000047422	219
7000047423	219
7000047426	219
7000047429	217
7000047430	217
7000047431	220
7000047432	215
7000047434	220
7000047441	177
7000047442	177
7000047450	155
7000047451	155
7000047452	155

Product ID	Page
7000047453	155
7000047454	155
7000047455	156
7000047456	154
7000047458	154
7000047459	154
7000047460	154
7000047461	155
7000047462	155
7000047463	155
7000047467	156
7000047468	156
7000047469	156
7000047473	156
7000047474	156
7000047475	156
7000047477	155
7000047478	155
7000047522	164
7000048380	155
7000048386	157
7000048387	157
7000048399	131
7000048401	154
7000048402	155
7000048403	157
7000048404	160
7000048409	165
7000048422	182
7000048423	182
7000048424	134
7000048426	262
7000048455	182
7000048456	182
7000048457	182
7000048458	182
7000048459	182
7000048467	256
7000048482	88
7000048483	88
7000048496	107
7000048524	154
7000048528	120
7000048566	178
7000048578	256
7000048580	123
7000048602	234
7000048604	173
7000048605	173
7000048606	173
7000048608	173
7000048610	185
7000048619	133
7000048627	185
7000048628	185
7000048629	185
7000048634	185
7000048652	185

Product ID	Page
7000048689	167
7000048702	169
7000048705	167
7000048706	120
7000048707	120
7000048708	120
7000048710	154
7000048711	164
7000048712	178
7000048716	169
7000048721	166
7000048746	132
7000048748	132
7000048751	177
7000048772	165
7000048775	156
7000048829	136
7000048833	185
7000048835	120
7000048838	126
7000048850	176
7000048856	116
7000048861	132
7000048873	103
7000048897	89
7000048907	262
7000048913	158
7000048914	159
7000048915	158
7000048917	158
7000048918	158
7000048919	158
7000048921	158
7000048923	158
7000048924	158
7000048939	177
7000049014	189
7000049045	166
7000049046	166
7000049047	166
7000049048	166
7000049097	119
7000049101	162
7000049120	119
7000049133	162
7000049163	111
7000049173	221
7000049192	200
7000049198	126
7000049200	145
7000049207	189
7000049210	77
7000049238	88
7000049243	101
7000049244	121
7000049257	77
7000049263	205

Product ID	Page
7000049265	205
7000049273	133
7000049274	133
7000049275	133
7000049277	206
7000049283	211
7000049321	133
7000049322	133
7000049325	133
7000049326	133
7000049327	133
7000049447	75
7000049448	74
7000049547	128
7000049564	194
7000049597	163
7000049603	163
7000049604	163
7000049661	193
7000049662	193
7000049663	193
7000049682	114
7000049683	114
7000049700	57
7000049801	119
7000050052	182
7000050053	170
7000050071	177
7000050073	169
7000050074	170
7000050075	170
7000050076	170
7000050077	169
7000050078	169
7000050118	166
7000050120	166
7000050121	166
7000050122	166
7000050128	166
7000050130	167
7000050131	167
7000050132	167
7000051776	141
7000051782	141
7000051800	236
7000051823	236
7000051892	145
7000051893	145
7000051894	145
7000051903	140
7000051909	139
7000051910	140
7000052144	146
7000052203	146
7000052205	147
7000052220	139
7000052222	141
7000052226	142

Product Index

Product ID	Page
7000052227	142
7000056829	240
7000056830	241
7000059884	173
7000059885	173
7000059886	173
7000059889	173
7000061749	51
7000061750	51
7000061752	51
7000061753	53
7000061757	57
7000061766	48
7000061767	48
7000061768	48
7000061778	52
7000061785	52
7000061786	52
7000061787	52
7000061788	52
7000061789	52
7000061797	55
7000062000	162
7000062001	134
7000062015	74
7000062459	171
7000062460	171
7000062461	171
7000062462	173
7000062467	145
7000062908	243
7000062909	56
7000068216	256
7000068217	249
7000068223	263
7000068775	263
7000068776	263
7000068779	263
7000068783	250
7000068786	258
7000068790	258
7000068792	258
7000068795	259
7000068797	259
7000070273	243
7000070288	50
7000070289	51
7000070297	50
7000070298	50
7000070299	50
7000070300	50
7000070301	50
7000070307	177
7000070311	94
7000070322	155
7000070515	93
7000070522	140
7000070523	143

Product ID	Page
7000070525	145
7000070534	146
7000071528	111
7000071715	62
7000071716	62
7000071732	130
7000071733	130
7000071735	130
7000071736	130
7000071737	130
7000071738	130
7000071739	130
7000071740	130
7000071741	130
7000071742	130
7000071743	130
7000071744	130
7000071745	130
7000071748	129
7000071750	129
7000071751	129
7000071753	129
7000071798	192
7000071804	192
7000072160	84
7000072164	84
7000072165	84
7000072166	84
7000072168	84
7000072169	84
7000072171	84
7000072183	92
7000072184	92
7000072197	84
7000072198	84
7000072199	84
7000072200	84
7000072201	84
7000072202	84
7000072204	84
7000072205	84
7000072206	84
7000072212	85
7000072216	85
7000072217	85
7000072218	85
7000072222	93
7000072225	93
7000072226	93
7000072229	93
7000072230	93
7000072231	93
7000072243	78
7000072247	78
7000072248	78
7000072250	78
7000072251	78
7000072252	78

Product ID	Page
7000072253	78
7000072254	78
7000072255	78
7000072257	78
7000072259	78
7000072260	78
7000072261	78
7000072262	78
7000072263	78
7000072264	78
7000072265	78
7000072266	78
7000072267	78
7000072270	78
7000072276	79
7000072281	79
7000072285	79
7000072289	79
7000072290	79
7000072292	79
7000072293	79
7000072294	79
7000072296	86
7000072299	86
7000072300	86
7000072301	86
7000072302	86
7000072303	86
7000072309	79
7000072311	79
7000072313	79
7000072317	80
7000072319	80
7000072320	80
7000072321	80
7000072322	80
7000072324	87
7000072325	87
7000072326	87
7000072327	87
7000072329	87
7000072330	87
7000072379	69
7000072381	69
7000072382	69
7000072383	69
7000072384	69
7000072385	69
7000072386	69
7000072387	69
7000072389	70
7000072390	70
7000072398	71
7000072399	70
7000072400	71
7000072407	70
7000072409	70
7000072411	70

Product ID	Page
7000072413	70
7000072414	70
7000072415	71
7000072416	71
7000072417	71
7000072458	72
7000072462	72
7000072463	72
7000072464	72
7000072465	72
7000072466	72
7000072467	72
7000072500	71
7000072501	71
7000072502	71
7000072504	71
7000072505	71
7000072511	71
7000072512	71
7000072522	87
7000072523	87
7000072524	87
7000072525	87
7000072529	72
7000072530	72
7000072533	72
7000072738	169
7000072740	169
7000073335	93
7000073373	97
7000073375	95
7000073406	118
7000073407	118
7000073424	101
7000073448	118
7000077193	50
7000077228	53
7000077229	51
7000077253	49
7000077254	49
7000077265	50
7000077267	50
7000077268	50
7000077270	52
7000077271	52
7000077272	52
7000077273	52
7000077274	51
7000077275	51
7000077312	49
7000077331	52
7000077333	50
7000077380	52
7000079781	54
7000079784	54
7000079786	54
7000079791	28
7000079794	54

Product Index

Product ID	Page
7000079796	54
7000079797	54
7000079798	54
7000079806	54
7000079807	54
7000079808	54
7000079817	39
7000079818	39
7000079819	39
7000079821	39
7000079823	39
7000079824	39
7000079843	39
7000079848	54
7000079889	49
7000079890	49
7000079905	39
7000079967	41
7000079968	41
7000079998	12
7000080008	17
7000080020	13
7000080037	17
7000080038	22
7000080039	22
7000080145	136
7000080206	37
7000080207	37
7000080208	37
7000080239	41
7000080242	41
7000080243	41
7000080245	41
7000080246	41
7000080250	42
7000080254	42
7000080396	15
7000080463	119
7000080464	119
7000080479	177
7000080483	157
7000080556	167
7000080606	240
7000081749	161
7000088347	184
7000088390	184
7000088507	187
7000088508	187
7000088515	182
7000088516	182
7000088517	182
7000088544	181
7000091410	123
7000095179	49
7000095238	229
7000095240	229
7000095243	229
7000095244	171

Product ID	Page
7000095257	173
7000095261	171
7000095264	227
7000095266	175
7000095268	171
7000095271	227
7000095272	229
7000095275	227
7000095276	229
7000095277	173
7000095286	229
7000095294	175
7000095299	175
7000095304	229
7000095309	171
7000095314	175
7000095320	175
7000095322	171
7000095343	232
7000095349	171
7000095370	232
7000095375	232
7000095376	232
7000095378	232
7000095393	230
7000095394	230
7000095395	230
7000095396	230
7000095400	230
7000095401	230
7000095403	230
7000095404	230
7000095409	230
7000095411	230
7000095412	230
7000095417	230
7000095418	230
7000095419	230
7000095433	230
7000095434	228
7000095435	228
7000095436	228
7000095437	228
7000095438	228
7000095462	225
7000095479	240
7000095481	241
7000095489	232
7000095501	231
7000095502	231
7000095504	228
7000095505	228
7000095540	228
7000095541	228
7000095555	231
7000095556	231
7000095558	231
7000095564	171

Product ID	Page
7000095567	228
7000095570	174
7000095572	174
7000095573	174
7000095574	174
7000095575	174
7000095576	174
7000095577	174
7000095578	174
7000095579	174
7000095580	231
7000095581	226
7000095582	228
7000095596	174
7000095602	171
7000095604	226
7000095630	228
7000095631	228
7000095635	171
7000095639	233
7000095640	233
7000095660	174
7000095669	228
7000095670	228
7000095672	173
7000095687	175
7000095688	175
7000095689	175
7000095690	176
7000095691	176
7000095692	176
7000095694	175
7000095695	175
7000095696	175
7000095697	176
7000095713	234
7000095714	234
7000095715	228
7000095730	176
7000095750	176
7000095766	176
7000095785	174
7000095823	176
7000095843	172
7000095844	172
7000095876	172
7000095896	228
7000096009	183
7000096162	162
7000096222	134
7000096242	90
7000096243	90
7000096244	90
7000096245	89
7000096247	90
7000096248	90
7000096250	90
7000096252	89

Product ID	Page
7000096253	91
7000096398	163
7000096405	158
7000096407	158
7000096408	159
7000096445	91
7000096450	92
7000096451	91
7000097248	266
7000110542	243
7000110554	28
7000110555	28
7000110852	91
700011459	190
700011460	190
700011461	190
700011462	190
700011463	190
700011464	190
700011465	190
700011466	190
700011467	190
700011468	190
700011469	190
700011470	190
700011471	190
700011472	190
700011473	190
700011474	190
700011475	190
700011476	190
700011477	190
700011478	190
700011479	190
700011480	190
700011483	190
700011484	190
700011485	190
700011486	190
700011487	190
700011488	190
700011490	190
700011521	135
700011522	135
700011526	133
700011527	133
700011533	117
700011534	117
700011535	117
700011549	162
700011563	92
700011564	92
700011566	91
700011971	162
700011987	134
700011993	162
700011997	134
7000115525	127

Product Index

Product ID	Page
7000115640	127
7000115642	127
7000115647	126
7000115660	126
7000115666	126
7000115669	127
7000115671	127
7000115673	127
7000115680	127
7000115755	113
7000115779	129
7000115869	221
7000115871	118
7000115873	118
7000115874	118
7000115875	118
7000115876	118
7000115982	213
7000116019	89
7000116020	89
7000116021	89
7000116022	89
7000116023	89
7000116029	88
7000116030	88
7000116031	88
7000116032	88
7000116033	88
7000116035	88
7000116037	88
7000116058	250
7000116065	252
7000116069	252
7000116071	253
7000116074	253
7000116079	253
7000116080	253
7000116082	253
7000116090	254
7000116100	246
7000116101	254
7000116117	252
7000116118	250
7000116134	255
7000116136	255
7000116176	248
7000116350	257
7000116354	254
7000116365	265
7000116388	265
7000116477	203
7000116478	203
7000116479	203
7000116480	203
7000116490	202
7000116491	202
7000116492	202
7000116493	203

Product ID	Page
7000116494	201
7000116510	202
7000116511	205
7000116514	204
7000116515	204
7000116516	202
7000116517	202
7000116521	201
7000116528	201
7000116530	201
7000116531	201
7000116537	203
7000116554	125
7000116555	125
7000116556	125
7000116558	125
7000116559	125
7000116560	125
7000116561	125
7000116576	132
7000116578	108
7000116581	132
7000116583	132
7000116584	132
7000116585	124
7000116587	125
7000116588	124
7000116590	132
7000116591	106
7000116593	106
7000116594	131
7000116595	131
7000116596	131
7000116597	131
7000116602	131
7000116611	107
7000116615	125
7000116616	125
7000116623	128
7000116631	105
7000116632	105
7000116634	105
7000116636	125
7000116638	106
7000116639	106
7000116640	108
7000116641	108
7000116642	107
7000116643	107
7000116644	106
7000116648	125
7000116649	125
7000116650	125
7000116651	125
7000116652	107
7000116653	107
7000116655	125
7000116656	125

Product ID	Page
7000116657	125
7000116658	106
7000116659	108
7000116660	107
7000116661	106
7000116664	125
7000116665	125
7000116666	125
7000116667	125
7000116669	125
7000116670	124
7000116671	105
7000116672	105
7000116673	105
7000116674	105
7000116675	105
7000116678	125
7000116681	125
7000116772	35
7000116775	36
7000116779	36
7000116782	40
7000116787	36
7000116790	36
7000116822	40
7000117086	261
7000122465	220
7000122466	220
7000123279	131
7000123281	131
7000124342	215
7000124630	172
7000124631	172
7000124742	186
7000124799	147
7000144706	158
7000144707	158
7000144708	158
7000144794	167
7000145662	262
7000146616	241
7000146617	241
7000147746	178
7010012127	76
7010292805	160
7010300467	193
7010337024	185
7100000168	254
7100001806	51
7100002405	194
7100003021	84
7100003056	178
7100003571	246
7100003930	176
7100005566	44
7100007291	133
7100007793	42
7100008116	252

Product ID	Page
7100008178	45
7100008737	46
7100008738	43
7100009003	210
7100009195	43
7100009688	22
7100009898	266
7100009949	246
7100010005	248
7100010680	19
7100011056	22
7100011333	252
7100011610	42
7100011658	216
7100011792	249
7100011840	247
7100012241	128
7100012272	128
7100013330	248
7100013610	262
7100013721	248
7100013744	260
7100015263	159
7100015266	159
7100015462	41
7100016326	187
7100016838	107
7100017793	145
7100019029	72
7100020027	145
7100020333	44
7100020334	46
7100020336	46
7100020337	43
7100020456	43
7100020587	98
7100020649	177
7100021262	98
7100021264	98
7100021265	97
7100021266	97
7100021267	97
7100021268	97
7100021269	98
7100021280	98
7100021281	98
7100021282	98
7100021283	97
7100021285	98
7100021286	97
7100021933	97
7100021940	98
7100022040	97
7100023018	47
7100023053	44
7100023282	97
7100023283	97
7100023468	97

Product Index

Product ID	Page
7100023942	255
7100024045	23
7100024055	23
7100024083	254
7100024176	250
7100024544	254
7100024646	98
7100024647	97
7100025020	235
7100025154	42
7100025246	45
7100025495	98
7100026479	235
7100026753	98
7100027084	196
7100027085	196
7100027507	58
7100027510	29
7100027821	205
7100027855	199
7100027856	199
7100027905	262
7100028023	200
7100028024	200
7100028052	200
7100028055	200
7100028056	200
7100028145	200
7100028148	200
7100028169	200
7100029174	95
7100029175	95
7100029176	96
7100029188	95
7100029348	42
7100029518	42
7100030360	96
7100030363	94
7100030713	106
7100030822	136
7100030935	96
7100030936	96
7100031009	96
7100031031	94
7100031051	94
7100031054	95
7100031061	95
7100031064	96
7100031985	43
7100032063	79
7100032985	100
7100033657	30
7100033708	30
7100033726	30
7100033985	31
7100034008	32
7100034009	29
7100034060	31

Product ID	Page
7100034061	29
7100034071	30
7100034072	32
7100034078	30
7100034279	31
7100034525	31
7100034893	38
7100035225	167
7100035736	177
7100036550	38
7100036717	18
7100036719	18
7100037923	131
7100037924	131
7100038129	38
7100038272	38
7100038427	96
7100038584	110
7100038631	110
7100038656	109
7100038693	110
7100038810	110
7100038865	31
7100038866	30
7100038963	110
7100039117	112
7100039155	118
7100039317	161
7100039413	112
7100039416	115
7100039641	111
7100039642	109
7100039643	111
7100039644	111
7100039645	113
7100039678	161
7100039714	118
7100039813	113
7100040051	88
7100040126	112
7100040284	109
7100040285	112
7100040287	112
7100040288	111
7100040289	115
7100040300	110
7100040301	115
7100040450	111
7100040451	109
7100040452	109
7100040453	113
7100040454	113
7100040455	115
7100040684	89
7100040836	29
7100040976	161
7100041614	183
7100041928	181

Product ID	Page
7100042087	21
7100042123	21
7100042235	96
7100042890	181
7100042893	181
7100042894	181
7100042895	181
7100042898	180
7100042899	180
7100042900	180
7100042901	180
7100042902	180
7100042903	180
7100042904	180
7100042954	180
7100042956	180
7100042957	180
7100042958	181
7100042982	181
7100044127	44
7100044170	155
7100044183	181
7100044184	181
7100044185	181
7100044186	181
7100044284	184
7100044285	183
7100044286	184
7100044306	98
7100044308	98
7100044320	98
7100044325	179
7100044328	179
7100044330	154
7100044331	157
7100044391	180
7100044392	180
7100044478	156
7100044624	155
7100044626	154
7100044627	156
7100044640	154
7100044646	156
7100044650	156
7100044652	155
7100044653	155
7100044654	155
7100044655	156
7100044656	155
7100044924	199
7100046034	183
7100046035	183
7100046036	183
7100046037	183
7100046038	183
7100046039	183
7100048317	183
7100048944	257

Product ID	Page
7100049359	154
7100049685	225
7100050336	48
7100050482	209
7100050882	225
7100051378	129
7100053471	207
7100053473	209
7100053515	179
7100053516	179
7100053575	207
7100053595	161
7100053596	161
7100053597	161
7100053598	161
7100053636	161
7100053638	161
7100053813	161
7100053924	161
7100054963	224
7100055238	186
7100055239	186
7100055250	186
7100055251	186
7100055252	186
7100055258	160
7100055259	160
7100055704	14
7100055705	14
7100055835	160
7100056217	160
7100057037	160
7100059421	161
7100062075	48
7100062076	48
7100062077	48
7100065027	179
7100065909	261
7100065923	165
7100065924	165
7100066060	266
7100067291	26
7100067297	26
7100068120	26
7100069366	27
7100069442	164
7100069498	11
7100071653	122
7100071665	155
7100071754	79
7100071755	125
7100072934	256
7100072947	265
7100073000	113
7100073285	247
7100073737	265
7100074607	122
7100075409	26

Product Index

Product ID	Page
7100075712	265
7100076727	13
7100077148	19
7100077297	48
7100078074	48
7100078165	23
7100078166	23
7100079530	204
7100079680	203
7100080091	204
7100080092	203
7100080096	203
7100080097	203
7100080100	204
7100080101	204
7100080102	204
7100080105	203
7100080108	203
7100082436	50
7100082438	50
7100082441	50
7100082565	18
7100082716	50
7100083354	42
7100083617	122
7100084174	114
7100084307	193
7100084588	13
7100084705	94
7100085634	135
7100085670	135
7100085671	135
7100085845	135
7100085854	135
7100086291	118
7100086951	195
7100086952	195
7100086953	195
7100086954	195
7100087075	196
7100087076	196
7100087101	195
7100087488	196
7100089302	238
7100089374	116
7100089375	116
7100089475	21
7100089476	21
7100089499	103
7100089541	104
7100089545	100
7100089546	100
7100089547	100
7100089548	101
7100089550	101
7100089551	101
7100089553	101
7100089557	102

Product ID	Page
7100089558	102
7100089779	196
7100090427	103
7100090446	100
7100092814	179
7100094823	77
7100096670	123
7100096671	123
7100096701	123
7100097574	26
7100097636	25
7100097704	26
7100097899	263
7100098631	25
7100098643	191
7100098687	192
7100098695	192
7100098707	191
7100098737	181
7100099833	68
7100099834	68
7100099836	68
7100100274	195
7100100275	195
7100100276	195
7100100277	195
7100100752	68
7100100753	68
7100100757	69
7100100910	196
7100101042	68
7100101043	69
7100101045	69
7100101074	195
7100101506	58
7100101623	68
7100101624	68
7100102180	58
7100102241	100
7100103009	199
7100104576	249
7100104630	253
7100104634	252
7100104640	263
7100104648	247
7100104650	261
7100104654	264
7100104655	265
7100104656	250
7100104657	264
7100104658	250
7100104659	263
7100104660	263
7100104661	263
7100104662	250
7100104663	250
7100104664	257
7100104665	254

Product ID	Page
7100104666	253
7100104667	253
7100104668	253
7100104669	253
7100104670	254
7100104671	265
7100104672	265
7100104673	265
7100104674	265
7100104675	265
7100104677	249
7100104678	252
7100104679	252
7100104680	252
7100104681	255
7100104682	250
7100104683	251
7100104684	254
7100104685	261
7100104686	264
7100104687	264
7100104688	264
7100104689	264
7100104690	246
7100104691	246
7100104692	250
7100104693	264
7100104695	250
7100104696	264
7100104697	250
7100104698	264
7100104699	265
7100104701	264
7100104702	264
7100104706	264
7100104709	264
7100104720	264
7100104721	264
7100104723	264
7100104724	264
7100104725	264
7100104726	264
7100104727	264
7100104728	250
7100104729	264
7100104730	263
7100104732	265
7100104734	252
7100104735	252
7100104736	258
7100104737	250
7100104738	251
7100104741	264
7100104742	264
7100104743	264
7100104744	264
7100104745	264
7100104746	246

Product ID	Page
7100104747	264
7100104748	264
7100104750	264
7100104752	265
7100104753	264
7100104756	265
7100104757	265
7100104759	264
7100104761	260
7100104762	250
7100104763	250
7100104764	250
7100104768	99
7100104769	103
7100104770	103
7100104771	104
7100104774	102
7100104775	102
7100104776	109
7100104780	94
7100104781	116
7100104783	95
7100104784	95
7100104786	110
7100104791	96
7100104792	96
7100104793	110
7100104794	98
7100104795	100
7100104796	101
7100104797	102
7100104798	121
7100104799	126
7100104800	127
7100104801	127
7100104803	97
7100104804	98
7100105384	23
7100107033	60
7100108708	189
7100108714	195
7100108725	146
7100108727	189
7100108728	189
7100108749	143
7100108752	146
7100108753	146
7100108754	142
7100108755	146
7100108756	143
7100108764	142
7100108765	142
7100108766	143
7100108767	142
7100108769	143
7100108887	195
7100108888	195
7100109827	21

Product Index

Product ID	Page
7100109828	21
7100109829	20
7100109830	20
7100109926	176
7100110454	263
7100110455	264
7100110456	264
7100113086	264
7100116406	60
7100117487	121
7100123266	140
7100123339	143
7100123340	145
7100123347	146
7100123355	79
7100123358	72
7100123727	140
7100131817	121
7100132669	121
7100132671	58
7100134196	260
7100134318	195
7100135038	195
7100135315	232
7100135318	232
7100135319	232
7100135321	232
7100135322	232
7100135323	232
7100135324	232
7100135325	232
7100135326	232
7100135347	232
7100135510	232
7100135720	179
7100135737	179
7100135739	179
7100135742	233
7100135743	233
7100135744	233
7100135745	233
7100135746	233
7100135748	179
7100135749	233
7100135750	232
7100135752	233
7100135754	233
7100135755	233
7100135761	179
7100135769	232
7100135770	232
7100135773	232
7100135774	233
7100136272	208
7100136273	208
7100136277	208
7100136278	208
7100136279	207

Product ID	Page
7100136280	207
7100136283	209
7100136285	208
7100136558	208
7100136620	207
7100136621	207
7100136882	264
7100137064	209
7100137072	233
7100137163	193
7100137182	193
7100138065	246
7100138125	40
7100138478	35
7100138817	37
7100140400	14
7100140578	14
7100141716	14
7100141727	14
7100141986	14
7100143305	66
7100143306	67
7100143321	67
7100143322	66
7100143323	67
7100143324	67
7100143325	67
7100143327	66
7100143328	67
7100143701	21
7100143961	21
7100144053	175
7100144090	171
7100144121	232
7100144122	232
7100144123	232
7100144124	232
7100144125	228
7100144147	232
7100144444	121
7100144517	249
7100144540	121
7100144543	121
7100146144	234
7100146162	234
7100146166	234
7100146490	230
7100146500	234
7100146753	183
7100147720	243
7100147820	250
7100147821	264
7100148731	19
7100148736	19
7100148737	20
7100148738	20
7100148750	11
7100148758	19

Product ID	Page
7100148760	11
7100148766	55
7100148836	122
7100148868	122
7100148994	103
7100152063	221
7100152066	215
7100152421	215
7100152422	215
7100152597	249
7100153134	102
7100154121	66
7100154122	67
7100154123	67
7100156413	164
7100156415	164
7100157801	171
7100158345	188
7100158346	188
7100158365	188
7100158377	188
7100158390	188
7100158521	57
7100158584	57
7100160295	261
7100160307	224
7100160319	224
7100160727	224
7100166745	251
7100166746	251
7100167269	164
7100167276	164
7100167280	164
7100167284	164
7100169890	260
7100171950	195
7100174095	258
7100174104	188
7100174105	188
7100174263	249
7100174264	249
7100174265	249
7100174266	249
7100174267	249
7100174270	258
7100174271	258
7100174272	258
7100174274	249
7100174275	258
7100174276	258
7100174278	249
7100174279	249
7100174284	257
7100174285	257
7100174286	249
7100174287	257
7100174294	249
7100174295	249

Product ID	Page
7100174304	249
7100174306	258
7100174309	249
7100174311	249
7100176092	37
7100178336	62
7100178338	62
7100179228	62
7100179264	22
7100179442	22
7100179480	23
7100179482	23
7100180981	62
7100181129	258
7100181130	249
7100181760	196
7100182558	265
7100183879	17
7100183880	17
7100185158	17
7100185187	17
7100185365	250
7100185368	253
7100185374	121
7100192649	97
7100193857	186
7100193898	257
7100193900	73
7100193935	73
7100193936	74
7100195214	73
7100195888	179
7100195952	179
7100196060	179
7100196061	179
7100196064	179
7100197969	175
7100198014	51
7100200484	11
7100200485	12
7100200486	12
7100200487	12
7100200488	13
7100200489	13
7100200490	13
7100200491	18
7100200492	18
7100200493	18
7100200496	15
7100200497	15
7100200498	15
7100200499	15
7100200501	15
7100200502	15
7100200503	16
7100200504	16
7100200505	16
7100200506	16

Product Index

Product ID	Page
7100200507	16
7100200508	16
7100205939	242
7100207277	165
7100207280	165
7100207284	165
7100207286	165
7100211800	75
7100211808	165
7100211813	76
7100211815	75
7100211816	75
7100211817	75
7100211818	75
7100211819	75
7100211820	75
7100211821	75
7100211822	75
7100211823	75
7100211824	75
7100211825	75
7100211826	76
7100211827	76
7100211828	76
7100211829	76
7100211830	76
7100211831	76
7100211832	76
7100211833	76
7100211834	76
7100211835	77
7100211836	77
7100211837	77
7100211838	77
7100211839	77
7100211840	77
7100214419	146
7100215092	227
7100215467	227
7100215511	227
7100216187	227
7100217373	120
7100219952	258
7100220358	230
7100220442	230
7100220792	105
7100221142	162
7100221164	162
7100221166	162
7100221270	167
7100223650	105
7100223836	77
7100223843	76
7100224321	105
7100224385	105
7100224762	105
7100224763	249
7100225996	105

Product ID	Page
7100225997	105
7100226020	105
7100226149	249
7100226380	105
7100226547	177
7100226808	169
7100227350	68
7100227956	210
7100230151	243
7100230199	263
7100230550	161
7100230552	161
7100232802	24
7100233348	25
7100233349	25
7100233359	24
7100238539	136
7100240965	22
7100243948	105
7100243949	105
7100243950	105
7100243951	105
7100244476	24
7100244477	24
7100244478	24
7100244480	25
7100244651	242
7100244652	242
7100244653	243
7100244858	25
7100244861	25
7100245036	24
7100245039	24
7100245592	163
7100245634	162
7100246043	26
7100246046	26
7100246871	213
7100247154	67
7100247155	67
7100247156	66
7100247163	213
7100247164	212
7100247165	213
7100247166	213
7100247250	212
7100247251	212
7100247622	212
7100248469	154
7100248651	154
7100249185	153
7100251992	153
7100251993	153
7100251995	153
7100253141	153
7100253142	153
7100253513	153
7100253517	153

Product ID	Page
7100254033	153
7100254034	153
7100254036	153
7100254037	153
7100255832	56
7100255953	56
7100255954	56
7100255955	56
7100259560	240
7100259561	240
7100259562	240
7100259598	154
7100259699	153
7100259700	153
7100259749	154
7100259750	154
7100260043	153
7100260125	156
7100260160	155
7100260161	154
7100260162	155
7100260268	179
7100260269	179
7100260270	179
7100260271	179
7100260280	158
7100260281	158
7100260282	157
7100260283	156
7100260284	159
7100260285	158
7100260286	158
7100260287	158
7100260288	158
7100260301	155
7100260302	154
7100260472	155
7100260483	155
7100260484	156
7100260569	156
7100260571	154
7100260574	240
7100260577	155
7100260578	154
7100260579	155
7100260581	155
7100260582	156
7100260584	156
7100260585	156
7100260586	156
7100260587	156
7100260588	156
7100260592	155
7100260593	156
7100260594	154
7100260595	154
7100260596	154
7100260597	155

Product ID	Page
7100260598	156
7100260599	159
7100260600	158
7100260619	154
7100260621	153
7100260624	153
7100260625	153
7100260682	156
7100260694	156
7100260695	156
7100260696	156
7100260697	156
7100260698	156
7100260721	17
7100260722	17
7100260853	155
7100260855	156
7100261524	155
7100261739	14
7100262488	55
7100262507	86
7100262508	86
7100262590	85
7100262591	85
7100262599	85
7100262600	86
7100262602	86
7100262606	86
7100262607	86
7100262608	86
7100262614	85
7100262616	85
7100262619	85
7100262858	86
7100263025	129
7100263680	191
7100263681	191
7100263682	191
7100263683	191
7100264010	104
7100265731	86
7100268065	66
7100269256	59
7100269257	59
7100269550	104
7100269551	104
7100269552	104
7100269603	104
7100269604	104
7100269702	104
7100269704	104
7100269705	104
7100269834	104
7100269835	104
7100269955	16
7100269976	13
7100269977	13
7100269978	15

Product Index

Product ID	Page
7100269979	15
7100269980	15
7100270163	16
7100270164	15
7100272109	234
7100276858	104
7100279337	143
7100279420	143
7100279569	143
7100279570	143
7100279571	144
7100279572	144
7100279603	144
7100279613	144
7100279614	144
7100279673	200
7100279679	200
7100279680	200
7100280536	184
7100280538	184
7100281475	184
7100283265	58
7100283355	58
7100285874	81
7100285875	80
7100285876	81
7100288303	67
7100288968	193
7100288972	193
7100289033	193
7100289034	194
7100289108	194
7100297050	68
7100297127	68
7100297128	68
7100297129	68
7100297479	69
7100301496	55
7100304367	55
7100307034	82
7100307057	82
7100307059	81
7100307061	83
7100307062	83
7100307226	82
7100307921	267
7100307922	268
7100307923	259
7100307924	268
7100307925	267
7100307932	259
7100307988	267
7100307989	268
7100308324	268
7100308326	267
7100308327	266
7100309726	83
7100309727	82

Product ID	Page
7100309728	81
7100309729	81
7100309730	80
7100309731	81
7100309949	83
7100309969	82
7100310930	82
7100311466	269
7100312118	99
7100312119	99
7100312120	99
7100312122	100
7100321905	99
7100321906	99
7100321907	99
7100321954	99



**Please scan the QR
code for additional
product information.**